

# MIDI ARC V™ - WALL SURFACE

Project Name:

Fixture Type:

Fixture Code:

Quantities:



# MIDI ARC V™ - WALL SURFACE



# MIDI ARC V™ - WALL SURFACE

**MIDI ARCs** Curved edge softens architectural lines and raises the impact of distinctive spaces. The smooth edges of **MIDI ARC** add a sleek and enticing appearance.

## GENERAL SPECIFICATION

### Body

Aluminum.

### Diffuser

Frosted acrylic

### Remote emergency

Emergency option provides a 1.5 hour (3hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch. Maximum distance between wall/ceiling plate and luminaire is 15' (4.5m). Test switch fits a single gang box (not supplied).

### Drivers

HPF electronic drivers for 120-277V (EU 240V).

### Reported L70 @25°C (77°F)

> 60,000 hrs.

### Finish

Powder coated for standard finishes.

### Sensors

Consult factory regarding sensor compatibility.

### Mechanical

Luminaires mount directly over 2" (50.8mm) x 3" (76.2mm) switch box (by others).

### Delivered lumens

Delivered lumens & LPW based on 4000K CRI 80+.

### Approvals

Damp Rated.

## MOUNTING & OPTICS



Front View Wall Mount (Midi Arc V)



General Diffuse



Declare

# MIDI ARC V™ - WALL SURFACE

## HOW TO ORDER

### A. LUMINAIRE

<b>MAVW1W01</b> 12", 1000 lms	<b>MAVW1W02</b> 24", 2000 lms	<b>MAVW1W03</b> 36", 3000 lms	<b>MAVW1W04</b> 47", 4000 lms
<b>MAVW1W06</b> 70", 6000 lms			

Delivered lumens shown at max output.

### B. LUMENS

<b>LMA0100</b> 1000 lm	<b>LMA0150</b> 1500 lm	<b>LMA0200</b> 2000 lm	<b>LMA0250</b> 2500 lm
<b>LMA0300</b> 3000 lm	<b>LMA0350</b> 3500 lm	<b>LMA0400</b> 4000 lm	<b>LMA0600</b> 6000 lm

Lumens shown at nominal value.  
Consult website for available lumens/length.

### C. CRI

<b>CR80</b> CRI 80+	<b>CR90</b> CRI 90+
---------------------	---------------------

### D. CCT

<b>CTA30</b> 3000K	<b>CTA35</b> 3500K	<b>CTA40</b> 4000K
--------------------	--------------------	--------------------

### E. VOLTAGE

<b>V1</b> 120/277V	<b>V2</b> 240V <sup>1</sup>
--------------------	-----------------------------

<sup>1</sup> Not available in North America.

### F. DIMMING

<b>DA01</b> 0-10V Dimming 1.0%
--------------------------------

### G. FINISH

<b>FA01</b> White	<b>FA56</b> White - Gloss	<b>FA02</b> Black Metallic - Textured	<b>FA20</b> Silver Metallic
<b>FA25</b> Gold Metallic - Textured	<b>FA42</b> Polished Aluminum - Mirror finish	<b>FA44</b> Midnight Blue Metallic - Textured	<b>FA45</b> Copper Metallic
<b>FA46</b> Charcoal Metallic - Textured	<b>FA47</b> Bronze Metallic - Textured	<b>FA52</b> Champagne Metallic	<b>FA53</b> Red Metallic - Textured

### H. EMERGENCY

<b>E0</b> Not required	<b>E1</b> Emergency system - Integral <sup>1</sup>	<b>E2</b> Emergency system - Remote
------------------------	--	-------------------------------------

<sup>1</sup> Available for MAVW1P04 & MAVW1P06 only in conjunction with V2. Not available in North America.

# MIDI ARC V™ - WALL SURFACE


## TECHNICAL DATA

### LUMINAIRE

Delivered lumens shown at max output.

Code	MAVW1W01	MAVW1W02	MAVW1W03	MAVW1W04	MAVW1W06
Length (A)	12"	24"	36"	47"	70"
Wattage	9W	17W	26W	34W	51W
Delivered lms	1000	2000	3000	4000	6000
LPW	117	117	117	117	117
Length (B)	7"	18"	18"	23"	23"

## FINISH


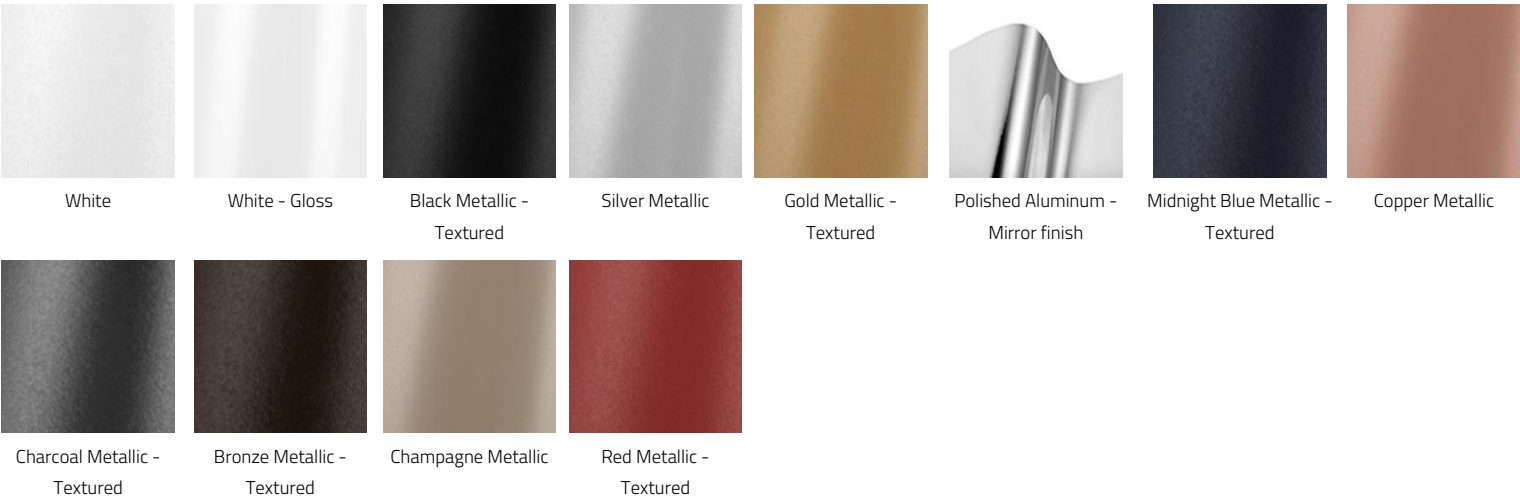


## APPROVALS



# MIDI ARC V™ - WALL SURFACE

## DIMENSIONAL DIAGRAMS

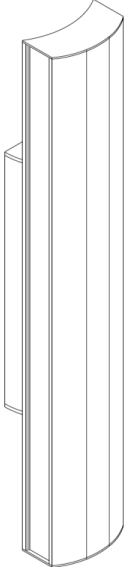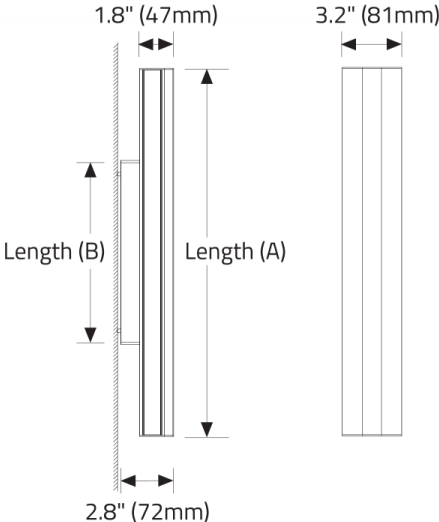

ISOMETRIC VIEW