
MICRO SQ DE™ - INSIDE/OUTSIDE

Project Name:

Fixture Type:

Fixture Code:

Quantities:

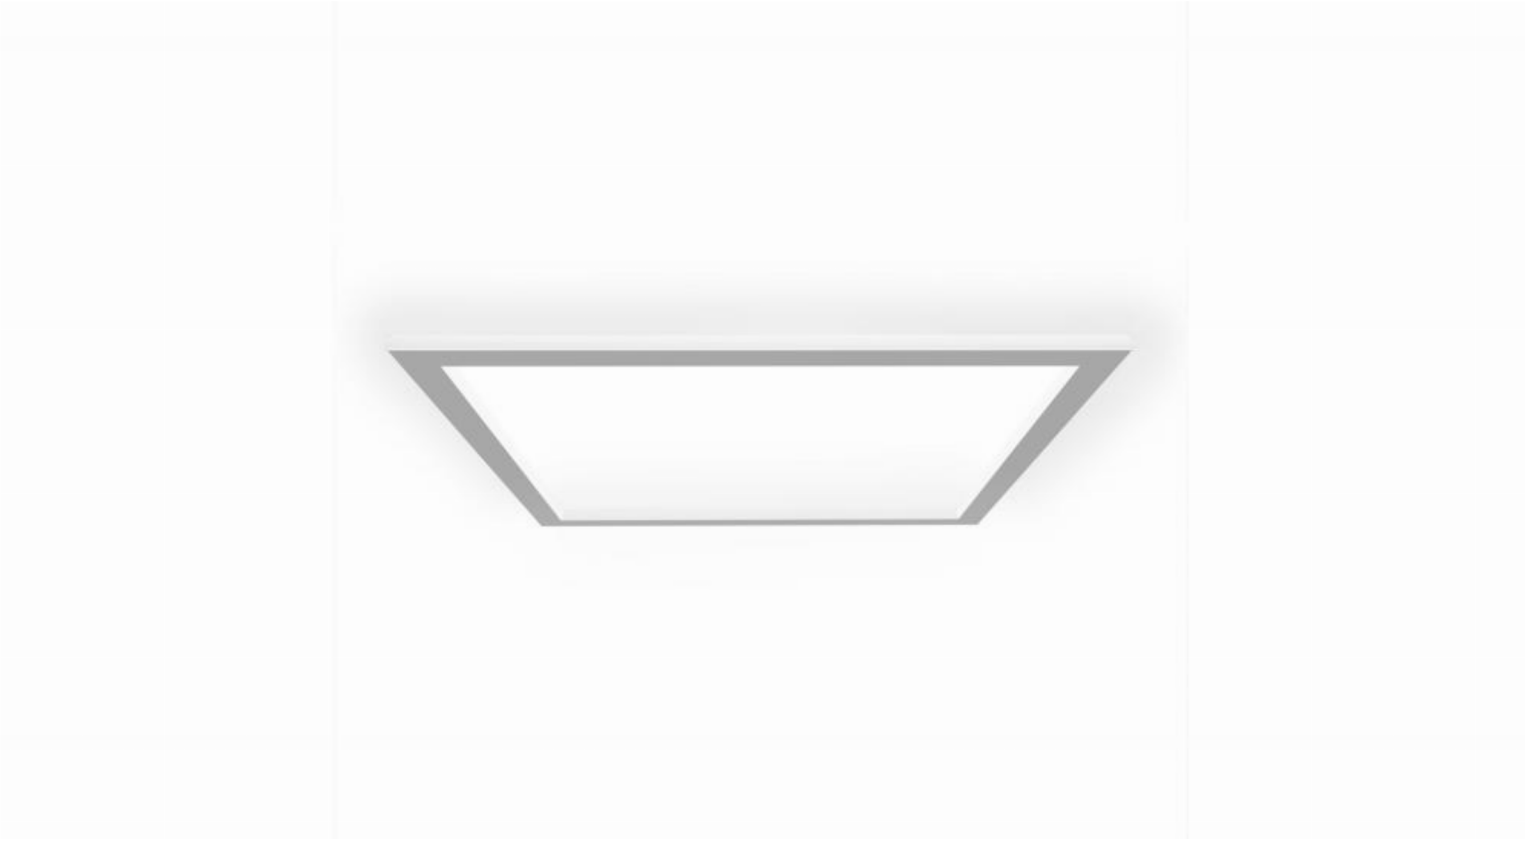

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

MICRO SQ DE™ - INSIDE/OUTSIDE

GENERAL SPECIFICATION

Body
Aluminium.

Finish
Powder coated.

Lens
Frosted Polycarbonate.

Drivers
Remote, HPF electronic drivers for 120-277V (EU-240V), 0-10V, 1% dimming standard. Wire size 18 AWG - max distance (from fixture to drivers)40', wire size 16 AWG - max distance 60', wire size 14 AWG - max distance 90'. Drivers must be accessible after installation.

L70 @25°C
> 50,000 hrs.

Delivered Lumens
Delivered lumens & LPW based on 3000K (min 80 CRI) for White LEDs only.

OPTICS & FEATURES


Surface Inside/Outside


Wall Inside/Outside

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

MICRO SQ DE™ - INSIDE/OUTSIDE

HOW TO ORDER

A. LUMINAIRE

982305 982305
982310 982310
982320 982320
982330 982330
982340 982340

B. CCT/COLOUR (OUTSIDE)

T30 3000K (min 80 CRI)
T35 3500K (min 80 CRI)
T40 4000K (min 80 CRI)
TRD Red
TGN Green
TBL Blue

C. CCT/COLOR (INSIDE)

S30 3000K (min 80 CRI)
S35 3500K (min 80 CRI)
S40 4000K (min 80 CRI)
SRD Red
SGN Green
SBL Blue

D. FINISH

WH White
BL Black
MS Silver Metallic
Z1 Wood Grain - Light Cherry
Z2 Wood Grain - Dark Walnut

TECHNICAL DATA

LUMINAIRE

Code	982305	982310	982320	982330	982340
Diameter (A)	24"	35"	48"	60"	73"
Power (LED)	53W	80W	110W	134W	165W
Delivered lms	4157	6256	8587	10606	13105
LPW	78	78	78	79	79


APPROVALS



© 2026 Beta-Calco Inc. Specifications are subject to change without notice

MICRO SQ DE™ - INSIDE/OUTSIDE

DIMENSIONAL DIAGRAMS

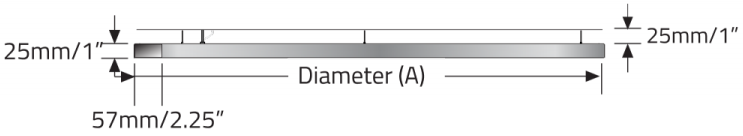

© 2026 Beta-Calco Inc. Specifications are subject to change without notice