


MICRO SQ DE™ - INSIDE/OUTSIDE

Project Name:

Fixture Type:

Fixture Code:

Quantities:

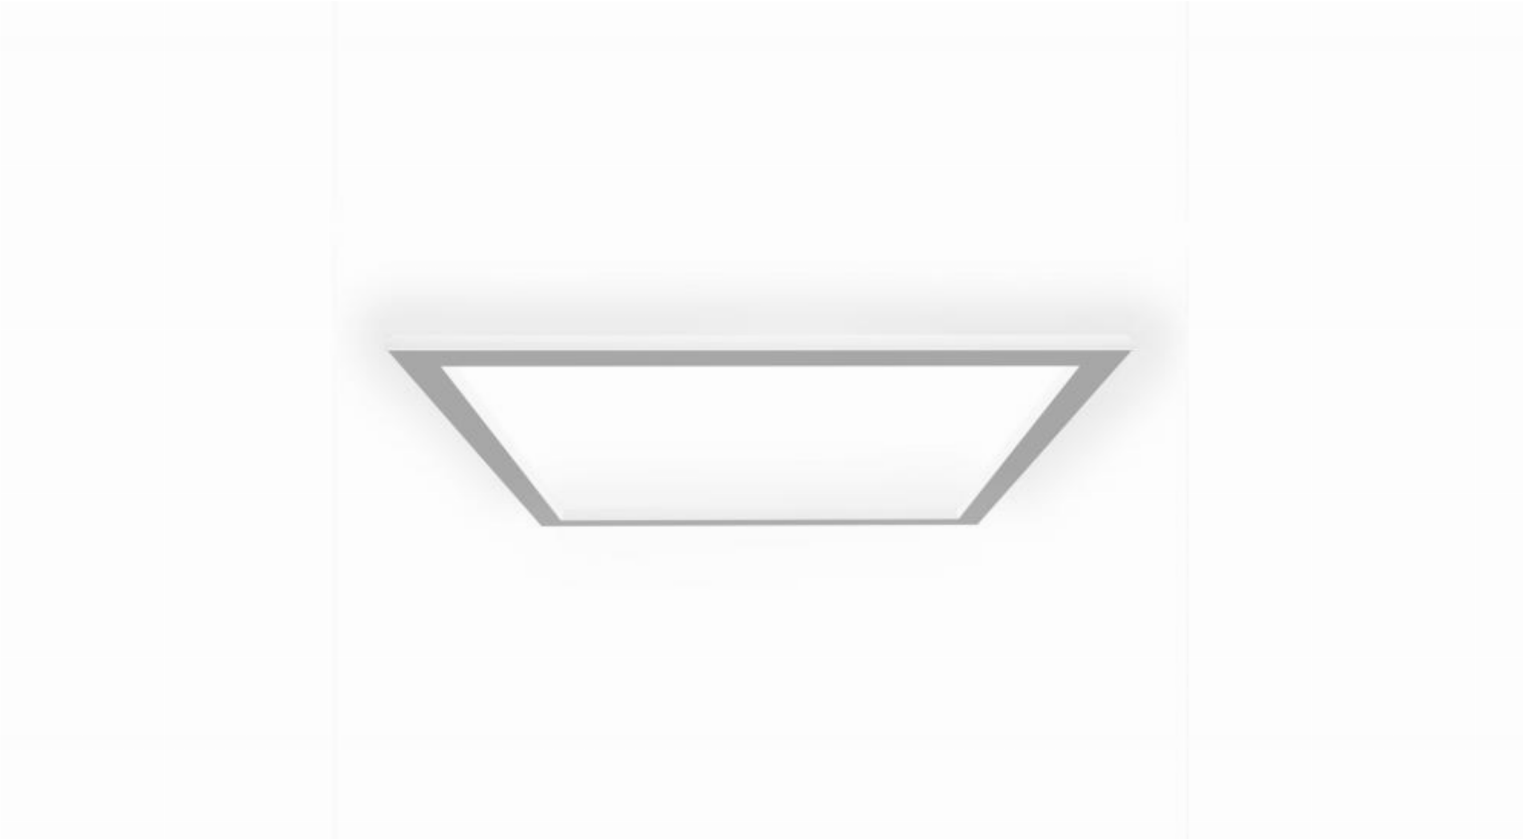

MICRO SQ DE™ - INSIDE/OUTSIDE

GENERAL SPECIFICATION

Body

Aluminium.

Diffusers

Frosted Polycarbonate.

L70 @25°C

> 50,000 hrs.

Finish

Powder coated.

Drivers

Remote, HPF electronic drivers for 120-277V (EU-240V), 0-10V, 1% dimming standard. Wire size 18 AWG - max distance (from fixture to drivers)40', wire size 16 AWG - max distance 60', wire size 14 AWG - max distance 90'. Drivers must be accessible after installation.


Delivered Lumens

Delivered lumens & LPW based on 3000K (min 80 CRI) for White LEDs only.

MOUNTING & OPTICS



Ceiling Inside/Outside



Wall Inside/Outside

MICRO SQ DE™ - INSIDE/OUTSIDE

HOW TO ORDER

A. LUMINAIRE

982305 982305

982310 982310

982320 982320

982330 982330

982340 982340

B. CCT/COLOUR (OUTSIDE)

T30 3000K (min 80 CRI)

T35 3500K (min 80 CRI)

T40 4000K (min 80 CRI)

TRD Red

TGN Green

TBL Blue

C. CCT/COLOR (INSIDE)

S30 3000K (min 80 CRI)

S35 3500K (min 80 CRI)

S40 4000K (min 80 CRI)

SRD Red

SGN Green

SBL Blue

D. FINISH

WH White

BL Black

MS Silver Metallic

Z1 Wood Grain - Light Cherry

Z2 Wood Grain - Dark Walnut

TECHNICAL DATA

LUMINAIRE

Code	982305	982310	982320	982330	982340
Diameter (A)	24"	35"	48"	60"	73"
Power (LED)	53W	80W	110W	134W	165W
Delivered lms	4157	6256	8587	10606	13105
LPW	78	78	78	79	79

APPROVALS



IP20



MICRO SQ DE™ - INSIDE/OUTSIDE

DIMENSIONAL DIAGRAMS

