


# MICRO SQ DE™ - INSIDE/OUTSIDE

Project Name:

Fixture Type:

Fixture Code:

Quantities:

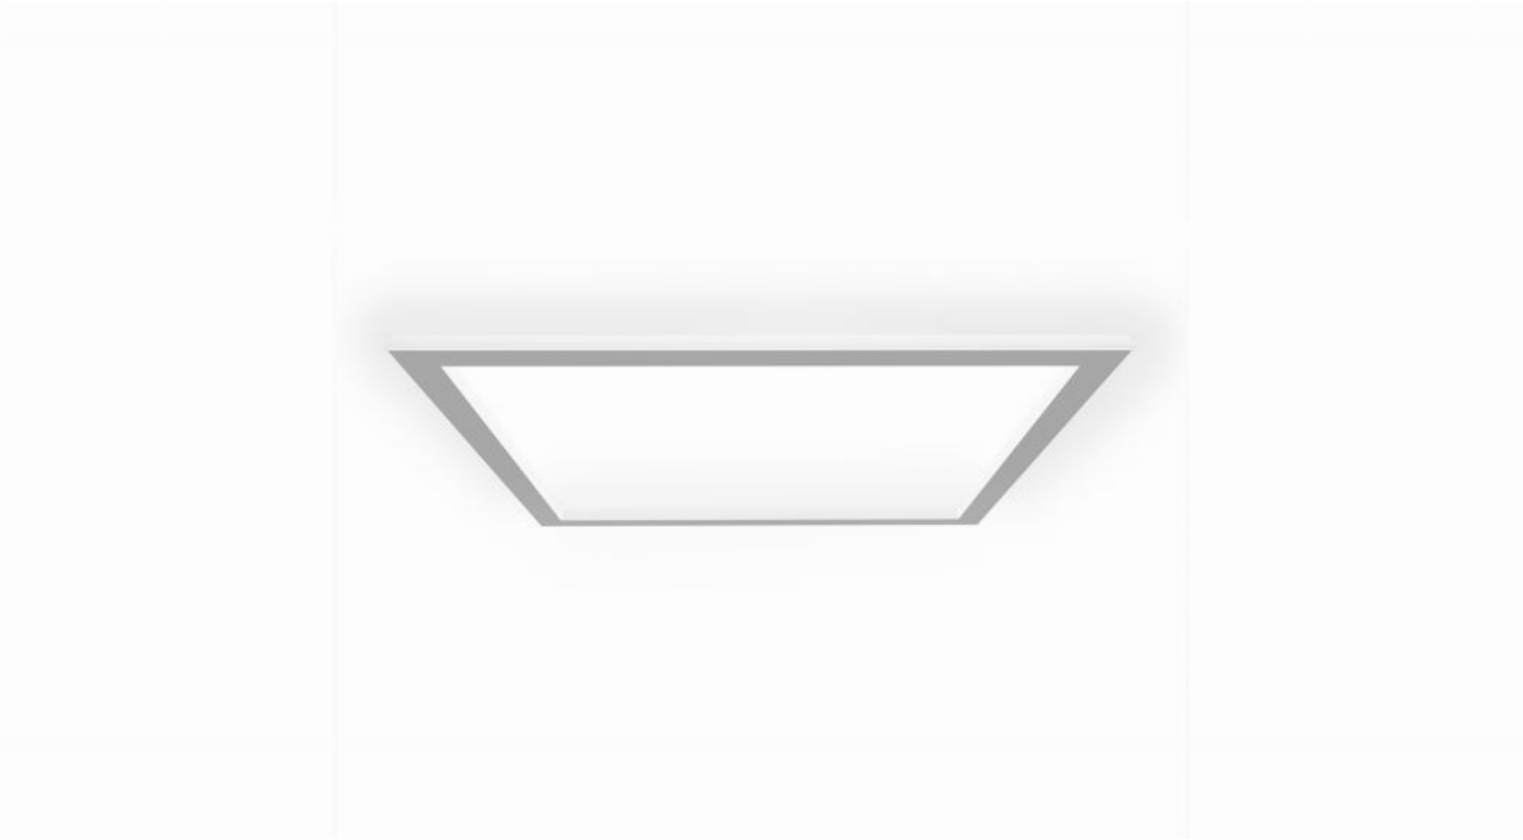

# MICRO SQ DE™ - INSIDE/OUTSIDE

## GENERAL SPECIFICATION

### Body

Aluminium.

### Lens

Frosted Polycarbonate.

### L70 @25°C

> 50,000 hrs.

### Finish

Powder coated.

### Drivers

Remote, HPF electronic drivers for 120-277V (EU-240V), 0-10V, 1% dimming standard. Wire size 18 AWG - max distance (from fixture to drivers)40', wire size 16 AWG - max distance 60', wire size 14 AWG - max distance 90'. Drivers must be accessible after installation.


### Delivered Lumens

Delivered lumens & LPW based on 3000K (min 80 CRI) for White LEDs only.

## OPTICS & FEATURES



Ceiling Inside/Outside



Wall Inside/Outside



# MICRO SQ DE™ - INSIDE/OUTSIDE

## HOW TO ORDER

### A. LUMINAIRE

**982305** 982305

**982310** 982310

**982320** 982320

**982330** 982330

**982340** 982340

### B. CCT/COLOUR (OUTSIDE)

**T30** 3000K (min 80 CRI)

**T35** 3500K (min 80 CRI)

**T40** 4000K (min 80 CRI)

**TRD** Red

**TGN** Green

**TBL** Blue

### C. CCT/COLOR (INSIDE)

**S30** 3000K (min 80 CRI)

**S35** 3500K (min 80 CRI)

**S40** 4000K (min 80 CRI)

**SRD** Red

**SGN** Green

**SBL** Blue

### D. FINISH

**WH** White

**BL** Black

**MS** Silver Metallic

**Z1** Wood Grain - Light Cherry

**Z2** Wood Grain - Dark Walnut

## TECHNICAL DATA

### LUMINAIRE

Code	982305	982310	982320	982330	982340
Diameter (A)	24"	35"	48"	60"	73"
Power (LED)	53W	80W	110W	134W	165W
Delivered lms	4157	6256	8587	10606	13105
LPW	78	78	78	79	79

## APPROVALS



IP20



# MICRO SQ DE™ - INSIDE/OUTSIDE

## DIMENSIONAL DIAGRAMS

