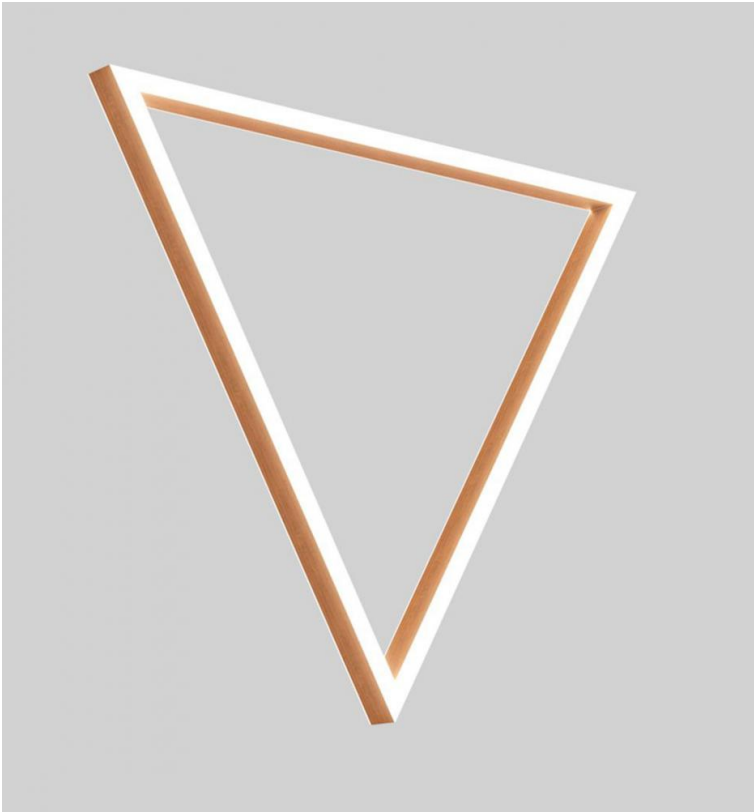


MICRO TRIANGLE II - WALL OR CEILING SURFACE

Project Name:	Fixture Type:
Fixture Code:	Quantities:



MICRO TRIANGLE II - WALL OR CEILING SURFACE

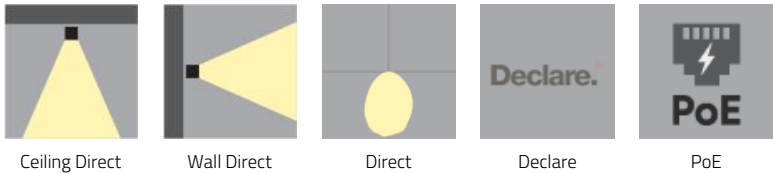


MICRO TRIANGLE II - WALL OR CEILING SURFACE

The triangle shape is a powerful way to create an edgy and energetic aesthetic. With a super-slim 1" profile and 5 sizes ranging from 2' to 6', **MICRO TRIANGLE II** is ideal for offsetting symmetrical layouts. The light emission is direct only or direct/indirect and can be coordinated with MICRO TRIANGLE SE which emits light from the inner side of the frame.

GENERAL SPECIFICATION

OPTICS & FEATURES



Ceiling Direct

Wall Direct

Direct

Declare

PoE

MICRO TRIANGLE II - WALL OR CEILING SURFACE

HOW TO ORDER

A. LUMINAIRE

MTTC1C24 2ft Direct, 2600lms	MTTC1C36 3ft Direct, 3900lms	MTTC1C48 4ft Direct, 5100lms	MTTC1C60 5ft Direct, 6500lms
MTTC1C72 6ft Direct, 7800lms			

B. LUMENS/FT

LPF021 215 lm/ft ¹	LPF032 320 lm/ft ²	LPF043 430 lm/ft ³	
--------------------------------------	--------------------------------------	--------------------------------------	--

¹ Based of 50% of total output.

² Based on 75% of total output.

³ 100% of total output.

C. CRI

CR80 CRI 80+	CR90 CRI 90+		
---------------------	---------------------	--	--

D. CCT

CTA27 2700K	CTA30 3000K	CTA35 3500K	CTA40 4000K
--------------------	--------------------	--------------------	--------------------

E. VOLTAGE

V1 120/277V	V2 240V ¹	V3 347V ²	V4 Low Voltage ³
--------------------	-----------------------------	-----------------------------	------------------------------------

¹ Not available in North America.

² Available with DA01 dimming only.

³ Available with DA45 dimming only.

F. DIMMING (REMOTE)

DA01 0-10V Dimming 1.0%	DA20 DALI Dimming 0.1% ¹	DA21 DALI Dimming 1.0% ¹	DA45 PoE ²
--------------------------------	--	--	------------------------------

¹ Not available with V3.

² Available with V4 only.

G. FINISH

FA01 White	FA02 Black Metallic - Textured	FA20 Silver Metallic - Textured	FA25 Gold Metallic - Textured
FA27 Wood grain - Light Cherry ¹	FA28 Wood grain - Dark Walnut ¹	FA44 Midnight Blue Metallic - Textured	FA45 Copper Metallic
FA46 Charcoal Metallic - Textured	FA47 Bronze Metallic - Textured	FA52 Champagne Metallic	FA53 Red Metallic - Textured

¹ Longer than normal lead times may apply, consult factory.

H. EMERGENCY

E0 Not required	E2 Emergency system - Remote		
------------------------	-------------------------------------	--	--













MICRO TRIANGLE II - WALL OR CEILING SURFACE

TECHNICAL DATA

LUMINAIRE

Code	MTTC1C24	MTTC1C36	MTTC1C48	MTTC1C60	MTTC1C72
Length	2ft	3ft	4ft	5ft	6ft
Light Direction	Direct	Direct	Direct	Direct	Direct
Wattage	20	30	40	50	60
Delivered lms	2600	3900	5100	6500	7800
LPW	128	130	129	129	130

FINISH

							
White	Black Metallic - Textured	Silver Metallic - Textured	Gold Metallic - Textured	Wood grain - Light Cherry ¹	Wood grain - Dark Walnut ¹	Midnight Blue Metallic - Textured	Copper Metallic
							
Charcoal Metallic - Textured	Bronze Metallic - Textured	Champagne Metallic	Red Metallic - Textured				

¹ Longer than normal lead times may apply, consult factory.

APPROVALS



MICRO TRIANGLE II - WALL OR CEILING SURFACE

DIMENSIONAL DIAGRAMS

