

MICRO TRIANGLE II - WALL OR CEILING SURFACE

Project Name:


Fixture Type:

Fixture Code:

Quantities:



MICRO TRIANGLE II - WALL OR CEILING SURFACE

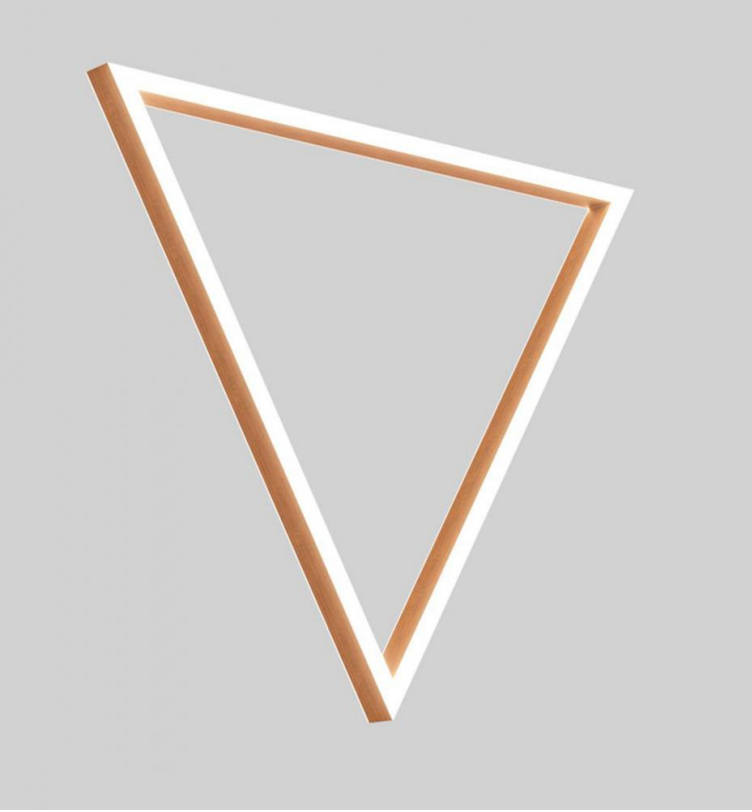


MICRO TRIANGLE II - WALL OR CEILING SURFACE

The triangle shape is a powerful way to create an edgy and energetic aesthetic. With a super-slim 1" profile and 5 sizes ranging from 2' to 6', **MICRO TRIANGLE II** is ideal for offsetting symmetrical layouts. The light emission is direct only or direct/indirect and can be coordinated with MICRO TRIANGLE SE which emits light from the inner side of the frame.

GENERAL SPECIFICATION

MOUNTING & OPTICS

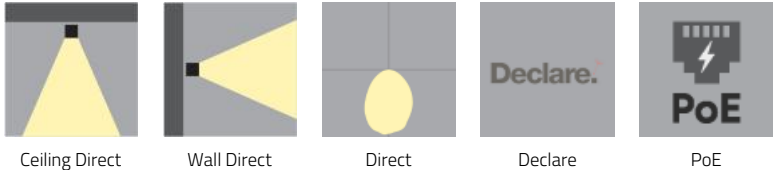

MICRO TRIANGLE II - WALL OR CEILING SURFACE

HOW TO ORDER

A. LUMINAIRE

MTTC1C24 2ft Direct, 2600lms

MTTC1C36 3ft Direct, 3900lms

MTTC1C48 4ft Direct, 5100lms

MTTC1C60 5ft Direct, 6500lms

MTTC1C72 6ft Direct, 7800lms

B. LUMENS/FT

LPF021 215 lm/ft ¹

LPF032 320 lm/ft ²

LPF043 430 lm/ft ³

¹ Based on 50% of total output.

² Based on 75% of total output.

³ 100% of total output.

C. CRI

CR80 CRI 80+

CR90 CRI 90+

D. CCT

CTA27 2700K ¹

CTA30 3000K

CTA35 3500K

CTA40 4000K

¹ Longer than normal lead time may apply, consult factory.

E. VOLTAGE

V1 120/277V

V2 240V ¹

V3 347V ²

V4 Low Voltage ³

¹ Not available in North America.

² Available with DA01 dimming only.

³ Available with DA45 dimming only.

F. DIMMING (REMOTE)

DA01 0-10V Dimming 1.0%

DA20 DALI Dimming 0.1% ¹

DA21 DALI Dimming 1.0% ¹

DA45 PoE ²

¹ Not available with V3.

² Available with V4 only.

G. FINISH

FA01 White

FA02 Black Metallic - Textured

FA20 Silver Metallic - Textured

FA25 Gold Metallic - Textured

FA27 Wood grain - Light Cherry ¹

FA28 Wood grain - Dark Walnut ¹

FA44 Midnight Blue Metallic - Textured

FA45 Copper Metallic

FA46 Charcoal Metallic - Textured

FA47 Bronze Metallic - Textured

FA52 Champagne Metallic

FA53 Red Metallic - Textured

¹ Longer than normal lead times may apply, consult factory.

H. EMERGENCY

E0 Not required

E2 Emergency system - Remote



MICRO TRIANGLE II - WALL OR CEILING SURFACE

TECHNICAL DATA


LUMINAIRE

Code	MTTC1C24	MTTC1C36	MTTC1C48	MTTC1C60	MTTC1C72
Length	2ft	3ft	4ft	5ft	6ft
Light Direction	Direct	Direct	Direct	Direct	Direct
Wattage	20	30	40	50	60
Delivered lms	2600	3900	5100	6500	7800
LPW	128	130	129	129	130

FINISH



White




Black Metallic -
Textured




Silver Metallic -
Textured



Gold Metallic -
Textured



Wood grain - Light
Cherry ¹




Wood grain - Dark
Walnut ¹



Midnight Blue Metallic -
Textured



Copper Metallic



Charcoal Metallic -
Textured



Bronze Metallic -
Textured



Champagne Metallic



Red Metallic -
Textured

¹ Longer than normal lead times may apply, consult factory.

APPROVALS

ADA



CE



DAMP
LOCATION



IP20



MICRO TRIANGLE II - WALL OR CEILING SURFACE

DIMENSIONAL DIAGRAMS

