

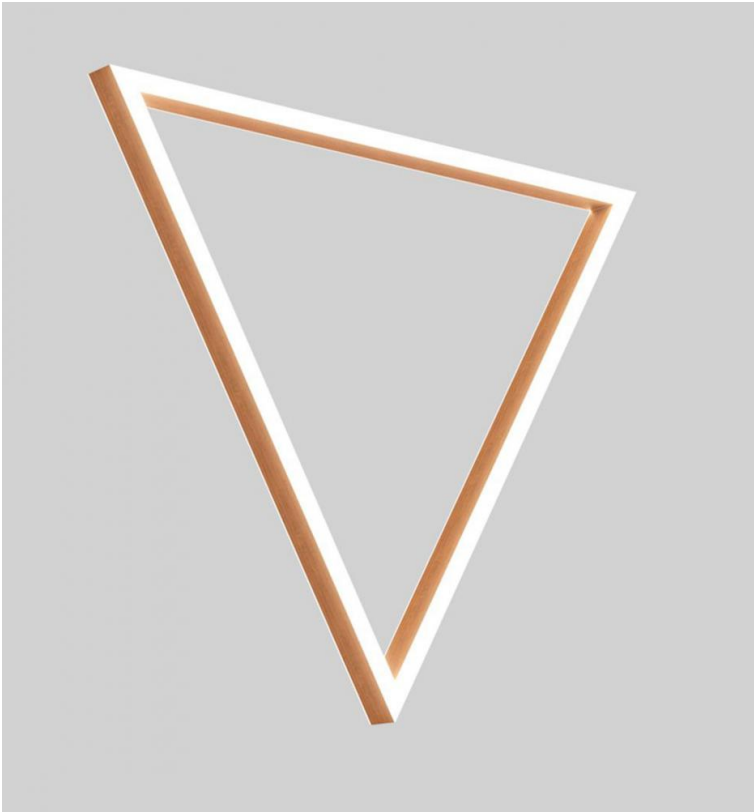
# MICRO TRIANGLE II - WALL OR CEILING SURFACE

Project Name:	Fixture Type:
Fixture Code:	Quantities:





MICRO TRIANGLE II - WALL OR CEILING SURFACE

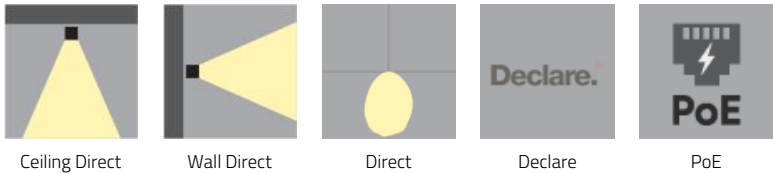


# MICRO TRIANGLE II - WALL OR CEILING SURFACE

The triangle shape is a powerful way to create an edgy and energetic aesthetic. With a super-slim 1" profile and 5 sizes ranging from 2' to 6', **MICRO TRIANGLE II** is ideal for offsetting symmetrical layouts. The light emission is direct only or direct/indirect and can be coordinated with MICRO TRIANGLE SE which emits light from the inner side of the frame.

## GENERAL SPECIFICATION

## OPTICS & FEATURES



# MICRO TRIANGLE II - WALL OR CEILING SURFACE

## HOW TO ORDER

### A. LUMINAIRE

<b>MTTC1C24</b> 2ft Direct, 2600lms	<b>MTTC1C36</b> 3ft Direct, 3900lms	<b>MTTC1C48</b> 4ft Direct, 5100lms	<b>MTTC1C60</b> 5ft Direct, 6500lms
<b>MTTC1C72</b> 6ft Direct, 7800lms			

### B. LUMENS/FT

<b>LPF021</b> 215 lm/ft <sup>1</sup>	<b>LPF032</b> 320 lm/ft <sup>2</sup>	<b>LPF043</b> 430 lm/ft <sup>3</sup>	
--------------------------------------	--------------------------------------	--------------------------------------	--

<sup>1</sup> Based of 50% of total output.  
<sup>2</sup> Based on 75% of total output.  
<sup>3</sup> 100% of total output.

### C. CRI

<b>CR80</b> CRI 80+	<b>CR90</b> CRI 90+		
---------------------	---------------------	--	--

### D. CCT

<b>CTA27</b> 2700K	<b>CTA30</b> 3000K	<b>CTA35</b> 3500K	<b>CTA40</b> 4000K
--------------------	--------------------	--------------------	--------------------

### E. VOLTAGE

<b>V1</b> 120/277V	<b>V2</b> 240V <sup>1</sup>	<b>V3</b> 347V <sup>2</sup>	<b>V4</b> Low Voltage <sup>3</sup>
--------------------	-----------------------------	-----------------------------	------------------------------------

<sup>1</sup> Not available in North America.  
<sup>2</sup> Available with DA01 dimming only.  
<sup>3</sup> Available with DA45 dimming only.

### F. DIMMING (REMOTE)

<b>DA01</b> 0-10V Dimming 1.0%	<b>DA20</b> DALI Dimming 0.1% <sup>1</sup>	<b>DA21</b> DALI Dimming 1.0% <sup>1</sup>	<b>DA45</b> PoE <sup>2</sup>
--------------------------------	--	--	------------------------------

<sup>1</sup> Not available with V3.  
<sup>2</sup> Available with V4 only.

### G. FINISH

<b>FA01</b> White	<b>FA02</b> Black Metallic - Textured	<b>FA20</b> Silver Metallic - Textured	<b>FA25</b> Gold Metallic - Textured
<b>FA27</b> Wood grain - Light Cherry <sup>1</sup>	<b>FA28</b> Wood grain - Dark Walnut <sup>1</sup>	<b>FA44</b> Midnight Blue Metallic - Textured	<b>FA45</b> Copper Metallic
<b>FA46</b> Charcoal Metallic - Textured	<b>FA47</b> Bronze Metallic - Textured	<b>FA52</b> Champagne Metallic	<b>FA53</b> Red Metallic - Textured

<sup>1</sup> Longer than normal lead times may apply, consult factory.

### H. EMERGENCY

<b>E0</b> Not required	<b>E2</b> Emergency system - Remote		
------------------------	-------------------------------------	--	--













# MICRO TRIANGLE II - WALL OR CEILING SURFACE

## TECHNICAL DATA

### LUMINAIRE

Code	MTTC1C24	MTTC1C36	MTTC1C48	MTTC1C60	MTTC1C72
Length	2ft	3ft	4ft	5ft	6ft
Light Direction	Direct	Direct	Direct	Direct	Direct
Wattage	20	30	40	50	60
Delivered lms	2600	3900	5100	6500	7800
LPW	128	130	129	129	130

### FINISH

							
White	Black Metallic - Textured	Silver Metallic - Textured	Gold Metallic - Textured	Wood grain - Light Cherry <sup>1</sup>	Wood grain - Dark Walnut <sup>1</sup>	Midnight Blue Metallic - Textured	Copper Metallic
							
Charcoal Metallic - Textured	Bronze Metallic - Textured	Champagne Metallic	Red Metallic - Textured				

<sup>1</sup> Longer than normal lead times may apply, consult factory.

### APPROVALS



# MICRO TRIANGLE II - WALL OR CEILING SURFACE

## DIMENSIONAL DIAGRAMS

