






MICRO TRIANGLE SE™


FULL SPECIFICATION SHEET

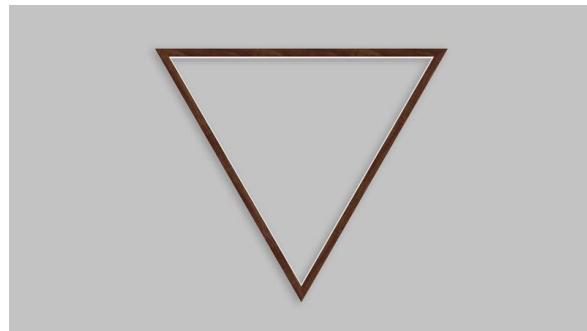

Fixture Type



Fixture Code




Quantities


1 DESCRIPTION

The triangular shape is a powerful way to create an edgy and energetic aesthetic. With a super-slim 1" profile and 3 sizes ranging from 2' to 4', **MICRO TRIANGLE SE** is ideal for offsetting symmetrical layouts. The light uniquely emits from the inner side of the frame and can be coordinated with **MICRO TRIANGLE II** which offers direct/indirect light. For a whimsical style, combine **MICRO TRIANGLE** with **MICRO RING** or **MICRO QUAD**. Available in a multitude of distinct finishes, this statement piece adds refinement and sophistication to your space.

2 OPTICS & FEATURES




Ceiling Inside



Wall Inside



General Diffuse



Declare



PoE

3 APPROVALS



4 GENERAL SPECIFICATION

BODY

Aluminium, Equilateral Triangle

FINISH

Powder coated.



MICRO TRIANGLE SE™ - WALL OR CEILING SURFACE

FULL SPECIFICATION SHEET

LENS

Frosted acrylic.

DRIVERS

Remote, HPF electronic drivers for 120-277V (EU-240V). Wire size 18 AWG - max distance (from fixture to drivers) 40' (12.2m), wire size 16 AWG - max distance 60' (18.3m), wire size 14 AWG - max distance 90' (27.4m). Drivers must be accessible after installation. The driver is integral to the fixture canopy or remote mount depending on size of fixture. For longer remote distances, consult factory.

DELIVERED LUMENS

Delivered lumens & LPW based on 4000K (min 80 CRI).

SENSORS

Consult factory regarding sensor compatibility.

POE

Micro Triangle SE can integrate into your data network via Power over Ethernet (PoE) connectivity.

REPORTED L70 @25°C(77°F)


> 60,000 hrs.

APPROVALS

Damp Rated.

5 DESIGN OPTIONS

FINISH

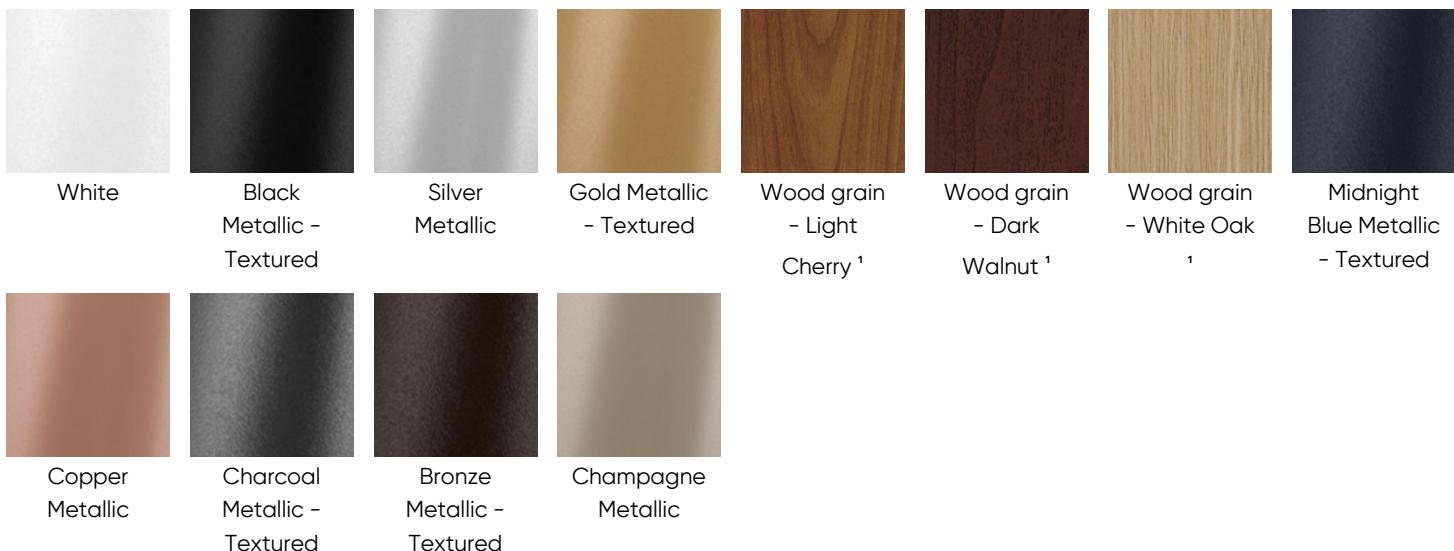

¹ Wood grain finishes may incur longer lead times and setup charges. Consult factory for details.

6 HOW TO ORDER**1. LUMINAIRE****MTEC1C02** 2ft Inside, 2300 lms **MTEC1C03** 3ft Inside, 3600 lms **MTEC1C04** 4ft Inside, 4800 lms**2. LUMENS****LPF020** 200 lm/ft ¹ **LPF030** 300 lm/ft ² **LPF040** 400 lm/ft ³¹ Based of 50% of total output. ² Based on 75% of total output. ³ 100% of total output.**3. CRI****CR80** CRI 80+ **CR90** CRI 90+**4. CCT****CTA27** 2700K **CTA30** 3000K **CTA35** 3500K **CTA40** 4000K**5. VOLTAGE****V1** 120/277V **V2** 240V ¹ **V3** 347V ² **V4** Low voltage ³¹ Not available in North America. ² Available with DA01 dimming only. ³ Available with DA45 dimming only.**6. DIMMING (REMOTE)****DA01** 0-10V Dimming 1.0% **DA20** DALI Dimming 0.1% ¹ **DA21** DALI Dimming 1.0% ¹ **DA45** PoE ²**7. FINISH**

FA01 White	FA02 Black Metallic - Textured	FA20 Silver Metallic	FA25 Gold Metallic - Textured
FA27 Wood grain - Light Cherry ¹	FA28 Wood grain - Dark Walnut ¹	FA30 Wood grain - White Oak ¹	FA44 Midnight Blue Metallic - Textured
FA45 Copper Metallic	FA46 Charcoal Metallic - Textured	FA47 Bronze Metallic - Textured	FA52 Champagne Metallic

¹ Wood grain finishes may incur longer lead times and setup charges. Consult factory for details.**8. SURFACE MOUNTING KIT****MK1** 1.25" extension (3 spacers) ¹ **MK2** 2.75" extension (3 spacers) ²¹ Standard. ² Extra length optional.

9. EMERGENCY

E0 Not required

E2 Emergency system - Remote

7

TECHNICAL DATA


LUMINAIRE

Code	MTEC1C02	MTEC1C03	MTEC1C04
Length	2ft	3ft	4ft
Light Direction	Inside	Inside	Inside
Wattage	20	30	40
Delivered lms	2300	3600	4800
LPW	116	122	120




8 TM-30 DATA

CCT 2700K

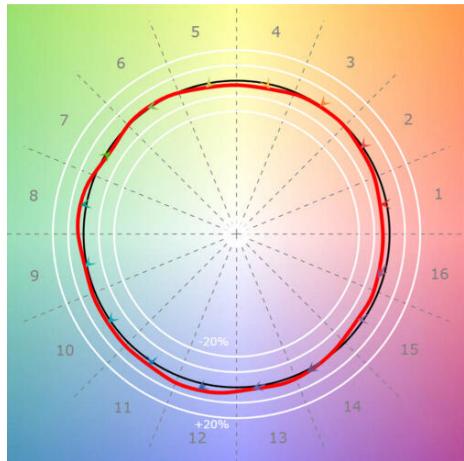


CRI(Ra)	94
CRI(R9)	58
TM30(Rf)	93
TM30(Rg)	99
Duv	0.0004

CCT 3000K

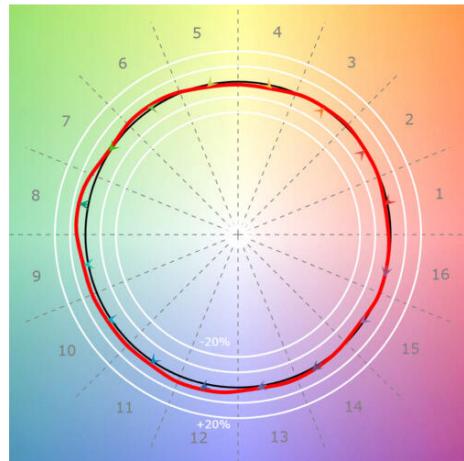


CRI(Ra)	94
CRI(R9)	75
TM30(Rf)	93
TM30(Rg)	102
Duv	-0.0001

CCT 3500K

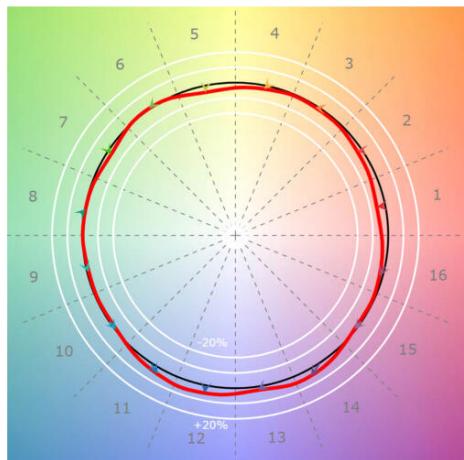

CRI(Ra)	94
CRI(R9)	53
TM30(Rf)	91
TM30(Rg)	98
Duv	0.0009

CCT 4000K

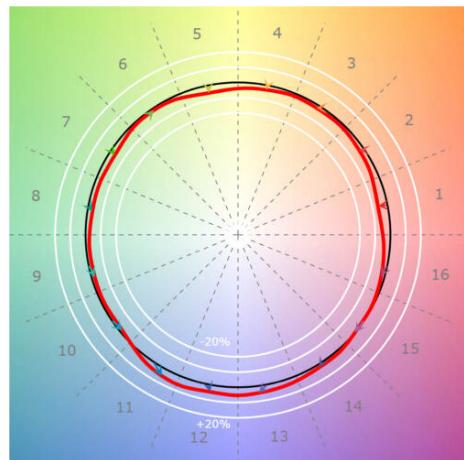

CRI(Ra)	92
CRI(R9)	50
TM30(Rf)	89
TM30(Rg)	97
Duv	0.0011

9 DIMENSIONAL DIAGRAMS

