


Project Name: Fixture Type:


Fixture Code: Quantities:



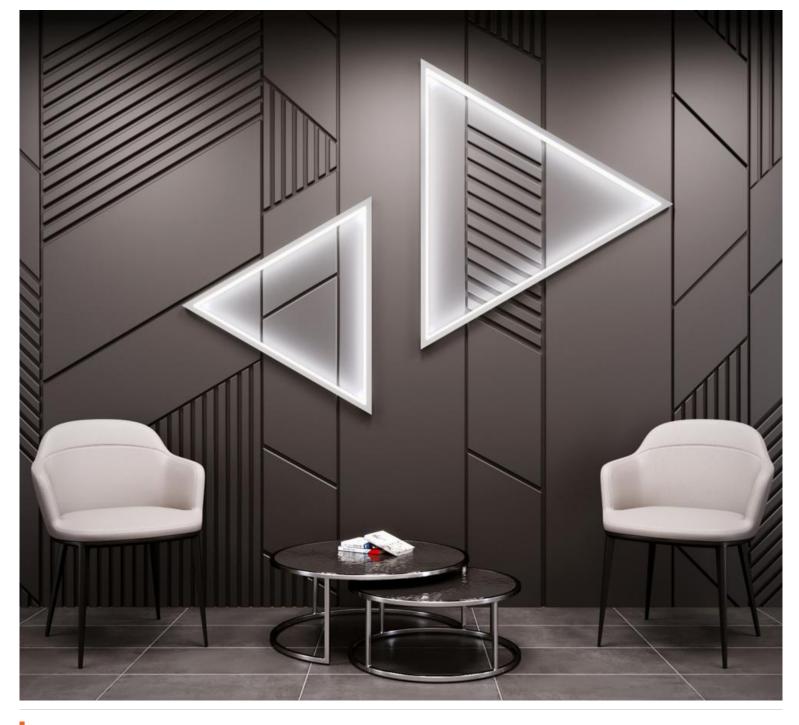

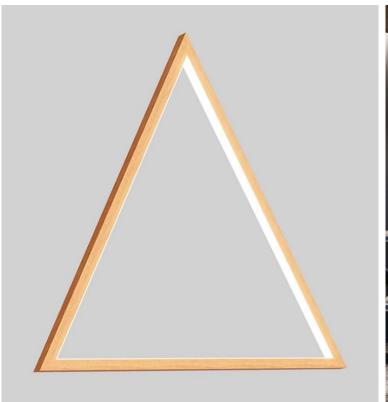

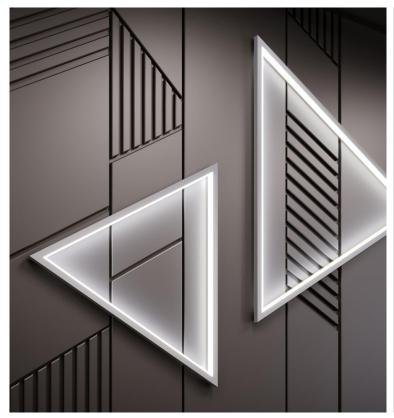

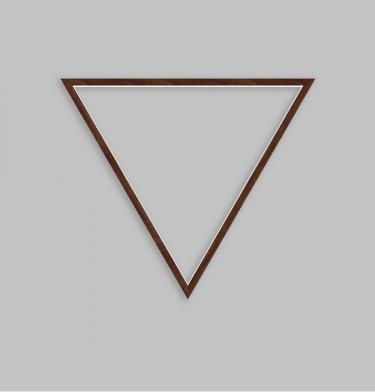

The triangle shape is a powerful way to create an edgy and energetic aesthetic. With a super-slim 1" profile, **MICRO TRIANGLE SE** is ideal for offsetting symmetrical layouts. The light uniquely emits from the inner side of the frame and can be coordinated with MICRO TRIANGLE II which offers direct/indirect light. For a whimsical style, combine MICRO TRIANGLE with MICRO RING or MICRO QUAD.

GENERAL SPECIFICATION

Body

Aluminium, Equilateral Triangle

Lens

Frosted acrylic.

Drivers

Remote, HPF electronic drivers for 120-277V (EU-240V). Wire size 18 AWG - max distance (from fixture to drivers) 40' 12.2m), wire size 16 AWG - max distance 60' (18.3m), wire size 14 AWG - max distance 90' (27.4m). Drivers must be accessible after installation. The driver is integral to the fixture canopy or remote mount depending on size of fixture.

Delivered Lumens

Delivered lumens & LPW based on 4000K (min 80 CRI).

Approvals

Damp Rated.

OPTICS & FEATURES







General Diffuse

Declare

Finish

Powder coated.

Sensors

Consult factory regarding sensor compatibility.

PoE

Micro Triangle SE can integrate into your data network via Power over Ethernet (PoE) connectivity.

Reported L70 @25°C (77°F)

> 60,000 hrs.



HOW TO ORDER

A. LUMINAIRE

MTEC1C02 2ft Inside, 2300 lms **MTEC1C03** 3ft Inside, 3600 lms **MTEC1C04** 4ft Inside, 4800 lms

B. LUMENS

LPF020 200 lm/ft 1 **LPF030** 300 lm/ft 2 **LPF040** 400 lm/ft 3

C. CRI

CR80 CRI 80+ **CR90** CRI 90+

D. CCT

E. VOLTAGE

F. DIMMING (REMOTE)

DA01 0-10V Dimming 1.0% **DA20** DALI Dimming 0.1% ¹ **DA21** DALI Dimming 1.0% ¹ **DA45** PoE ²

G. FINISH

FA01 White FA02 Black Metallic - Textured FA20 Silver Metallic - Textured FA27 Wood grain - Light Cherry FA28 Wood grain - Dark Walnut FA44 Midnight Blue Metallic - Textured FA45 Copper Metallic

FA46 Charcoal Metallic - Textured FA47 Bronze Metallic - Textured FA52 Champagne Metallic FA53 Red Metallic - Textured FA53 Red Metallic - Textured FA54 Champagne Metallic FA55 Champagne Metallic FA

H. SURFACE MOUNTING KIT

MK1 Surface mounting kit 1.25" **MK2** Surface mounting kit 2.75" extension c/w 3 spacers ¹ extension c/w 3 spacers ²

I. EMERGENCY

E0 Not required **E2** Emergency system - Remote

¹ Based of 50% of total output.

² Based on 75% of total output.

³ 100% of total output.

¹ Not available in North America.

² Available with DAO1 dimming only.

³ Available with DA45 dimming only.

¹ Wood grain finishes may incur longer lead times and setup charges. Consult factory for details.

¹ Standard.


² Extra length optional.

TECHNICAL DATA

LUMINAIRE

Code	MTEC1C02	MTEC1C03	MTEC1C04
Length	2ft	3ft	4ft
Light Direction	Inside	Inside	Inside
Wattage	20	30	40
Delivered Ims	2300	3600	4800
LPW	116	122	120

FINISH

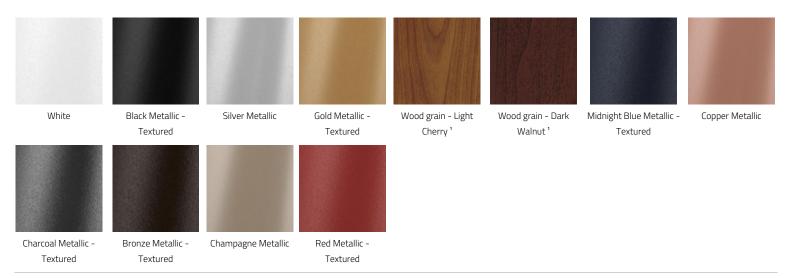

¹ Wood grain finishes may incur longer lead times and setup charges. Consult factory for details.

APPROVALS













DIMENSIONAL DIAGRAMS

