ONE4TWO CL™ - CEILING & CANOPY EXTERIOR

Project Name:

Fixture Type:

Fixture Code:

Quantities:



© 2026 Beta-Calco Inc. Specifications are subject to change without notice

ONE4TWO CL™ - CEILING & CANOPY EXTERIOR

GENERAL SPECIFICATION

Housing
Die-cast and extruded aluminum.

Lens
Clear glass.

Reflector
High purity aluminum, silver anodized.

Drivers
HPF, electronic for 120-277V (EU-240V). Dimming 0-10V.

Weight
Maximum 4Kg/8.8lb.

Delivered Lumens
Delivered lumens & LPW based on 3000K (min 80 CRI).

External Screws
Stainless steel.

Gaskets
One piece silicone.

Finish
Silver powder coated light gray or black powder coated as standard.

Minimum Starting Temperature
-30°C for LEDs.

Mechanical
Mounts directly over an electrical junction box (by others - Noth America only).
Mounting hardware (by others).

OPTICS & FEATURES


Ext-Ceiling/Canopy


10°


35°

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

ONE4TWO CL™ - CEILING & CANOPY EXTERIOR

HOW TO ORDER

A. LUMINAIRE

267133 267133

267143 267143

B. CCT

30 3000K (min 80 CRI)

40 4000K (min 80 CRI)

C. FINISH

BL Black

GR Light Gray

D. OPTIONS

DB Dimming (0-10V, 10%)

TECHNICAL DATA

LUMINAIRE

Code	267133	267143
Power (LED)	14W	14W
Beam	10°	35°
Delivered lms	1049	1049


APPROVALS



© 2026 Beta-Calco Inc. Specifications are subject to change without notice

ONE4TWO CL™ - CEILING & CANOPY EXTERIOR

DIMENSIONAL DIAGRAMS

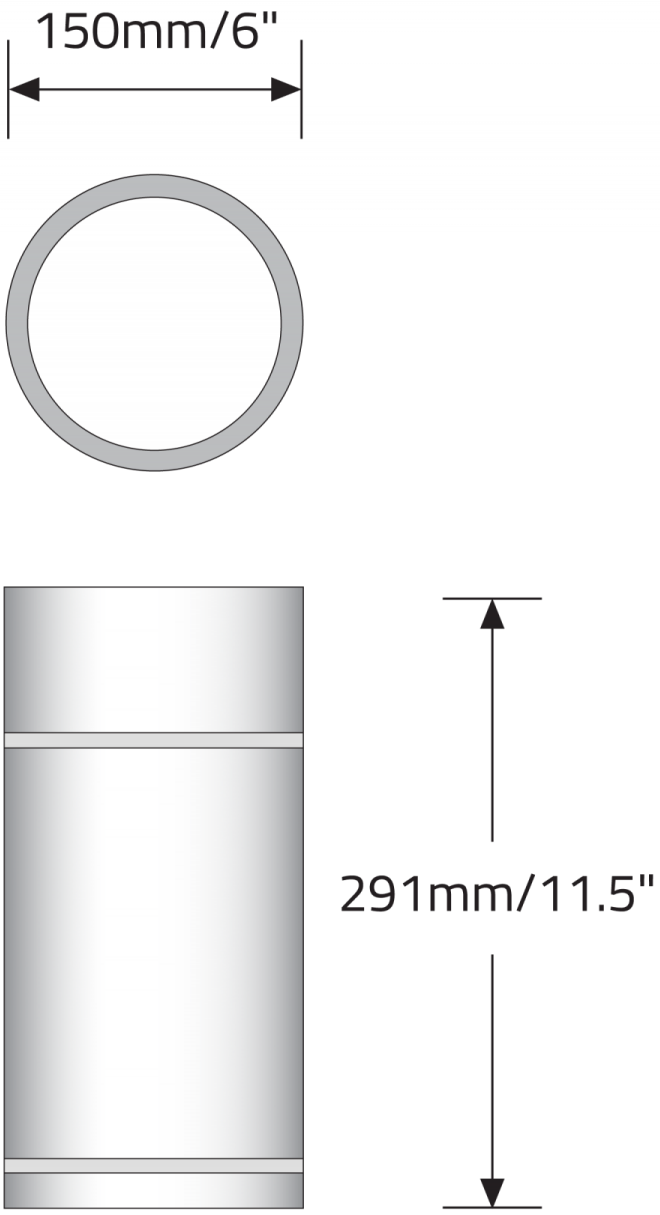

© 2026 Beta-Calco Inc. Specifications are subject to change without notice