

ONE4TWO™ - MEDIUM - WALL

Project Name:



Fixture Type:

Fixture Code:

Quantities:



ONE4TWO™ - MEDIUM - WALL

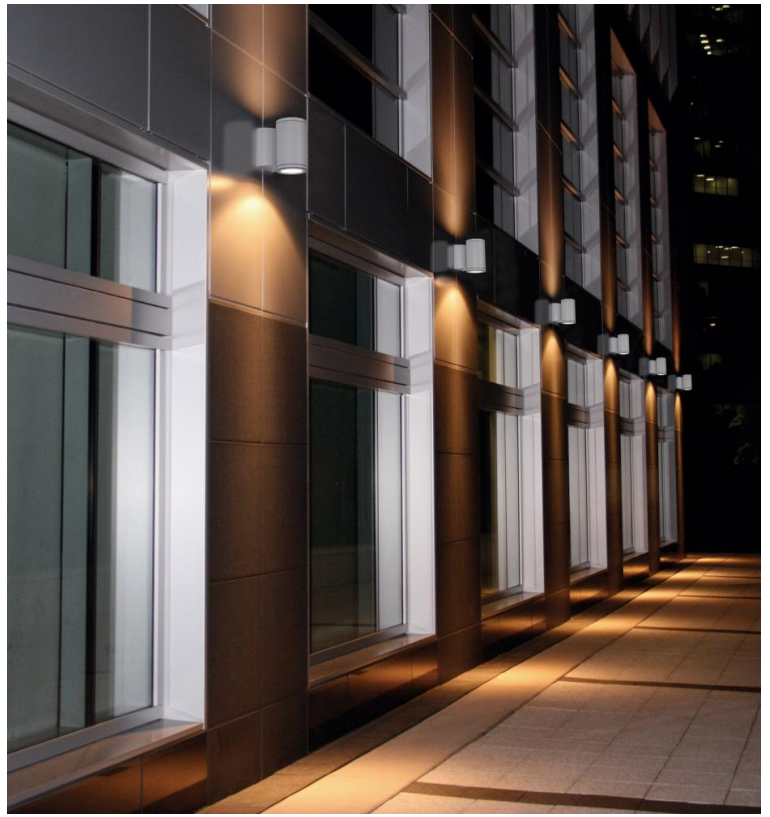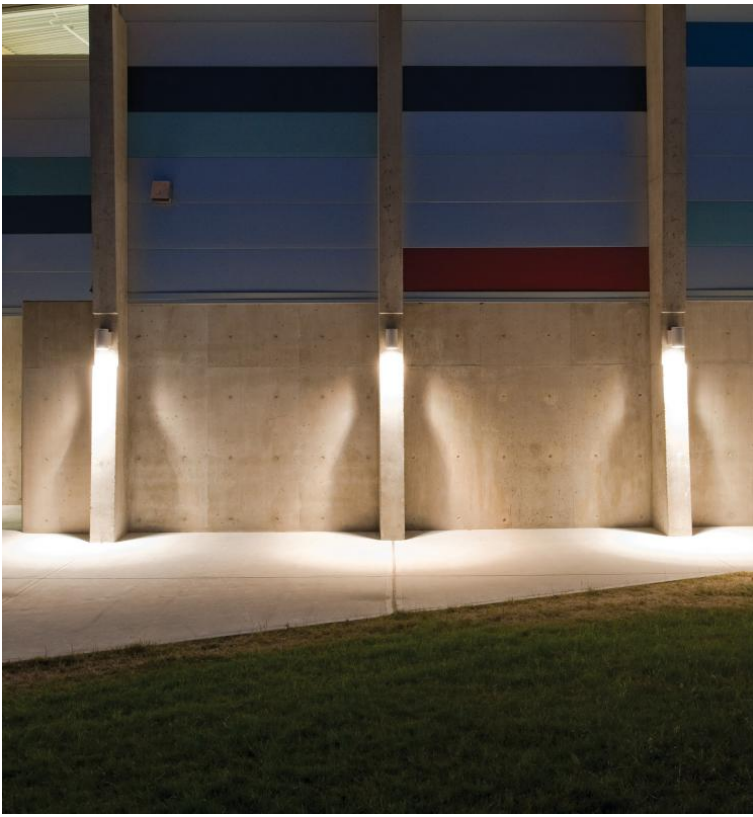

ONE4TWO™ - MEDIUM - WALL

ONE4TWO is a facade light designed with a robust cylindrical aesthetic and engineered with exceptional power in both light output and optical control. Available with two lumen packages with either narrow or medium beams. An internal reflector ensures efficient light distribution allowing the cylinder to be mounted at higher elevations for wayfinding or to accent facade features.

GENERAL SPECIFICATION

Housing

Die-cast and extruded aluminium.

External Screws

Stainless steel.

Lens

Clear glass.

Gaskets

One piece silicone.

Finish

Silver powder coated light gray or black coated as standard.

Reflector

High purity aluminium, silver anodised.

Drivers

HPF, electronic for 120-277V (EU-240V).

Minimum Starting Temperature

-20°C.

Delivered Lumens

Delivered lumens & LPW based on 3000K (min 80 CRI).

Weight

Maximum 8.8lb.

Dark Sky Friendly

Dark Sky Friendly if ordered with 3000K CCT and direct only.

MOUNTING & OPTICS



Ext-Wall Downlight



Ext-Wall Up/Down



10°



35°



Dark Sky Friendly



ONE4TWO™ - MEDIUM - WALL

HOW TO ORDER

A. LUMINAIRE

267033 10° up + 35° down, 2098 lms **267013** 10° up + 10° down, 2098 lms **267023** 35° up + 35° down, 2098 lms **267113** 10° down, 1049 lms
267123 35° down, 1049 lms

B. CCT

30 3000K (min 80 CRI) **40** 4000K (min 80 CRI)

C. FINISH

BL Black Metallic Textured **GR** Light Gray

D. DIMMING

DB Dimming (0-10V, 10%)¹

¹ Dimming is equal to less than 10%.

TECHNICAL DATA

LUMINAIRE

Code	267033	267013	267023	267113	267123
Power (LED)	2 x 14W	2 x 14W	2 x 14W	14W	14W
Delivered lms	2098	2098	2098	1049	1049
Distribution	10° up + 35° down	10° up + 10° down	35° up + 35° down	10° down	35° down

FINISH



Black Metallic Textured



Light Gray

APPROVALS



ONE4TWO™ - MEDIUM - WALL

DIMENSIONAL DIAGRAMS

