
Project Name: Fixture Type:

Fixture Code: Quantities:







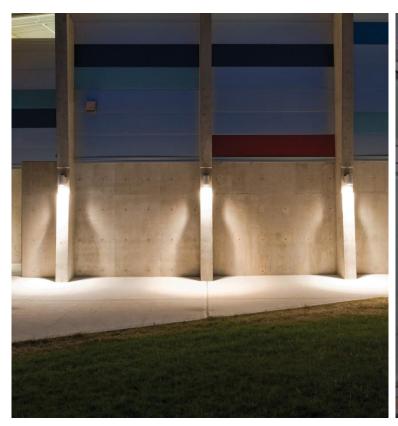



ONE4TWO is a facade light designed with a robust cylindrical aesthetic and engineered with exceptional power in both light output and optical control. Available with two lumen packages with either narrow or medium beams. An internal reflector ensures efficient light distribution allowing the cylinder to be mounted at higher elevations for wayfinding or to accent facade features.

High purity aluminium, silver anodised.

Minimum Starting Temperature

External Screws

One piece silicone.

Stainless steel.

Gaskets

Reflector

-20°C.

Weight

Maximum 8.8lb.

GENERAL SPECIFICATION

Housing

Die-cast and extruded aluminium.

Lens

Clear glass.

Finish

Silver powder coated light gray or black coated as standard.

Drivers

HPF, electronic for 120-277V (EU-240V).

Delivered Lumens

Delivered lumens & LPW based on 3000K (min 80 CRI).

Dark Sky Friendly

Dark Sky Friendly if ordered with 3000K CCT and direct only.

OPTICS & FEATURES

Ext-Wall Downlight Ext-Wall Up/Down









35°



10°

Da

Dark Sky Friendly

HOW TO ORDER

A. LUMINAIRE

267033 10° up + 35° down, 2098 lms **267013** 10° up + 10° down, 2098 lms **267023** 35° up + 35° down, 2098 lms **267113** 10° down, 1049 lms

267123 35° down, 1049 lms

B. CCT

30 3000K (min 80 CRI) 40 4000K (min 80 CRI)

C. FINISH

BL Black Metallic Textured **GR** Light Gray

D. DIMMING


DB Dimming (0-10V, 10%) ¹

TECHNICAL DATA

LUMINAIRE

Code	267033	267013	267023	267113	267123
Power (LED)	2 x 14W	2 x 14W	2 x 14W	14W	14W
Delivered Ims	2098	2098	2098	1049	1049
Distibution	10° up + 35° down	10° up + 10° down	35° up + 35° down	10° down	35° down

FINISH





Light Gray

APPROVALS













¹ Dimming is equal to less than 10%.

DIMENSIONAL DIAGRAMS

