

## ONE4TWO™ - MEDIUM - WALL

Project Name:

Fixture Type:

Fixture Code:

Quantities:





[betacalco.com](http://betacalco.com) | +1 416-531-9942 | [sales@betacalco.com](mailto:sales@betacalco.com)

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

Jan 9, 2026

Page 1 of 5

## ONE4TWO™ - MEDIUM - WALL

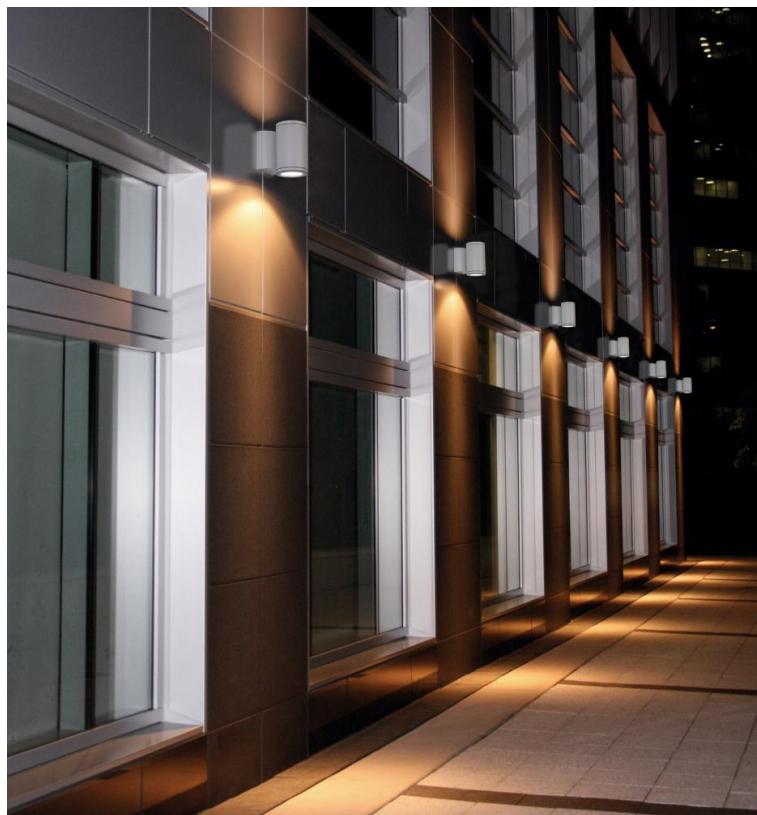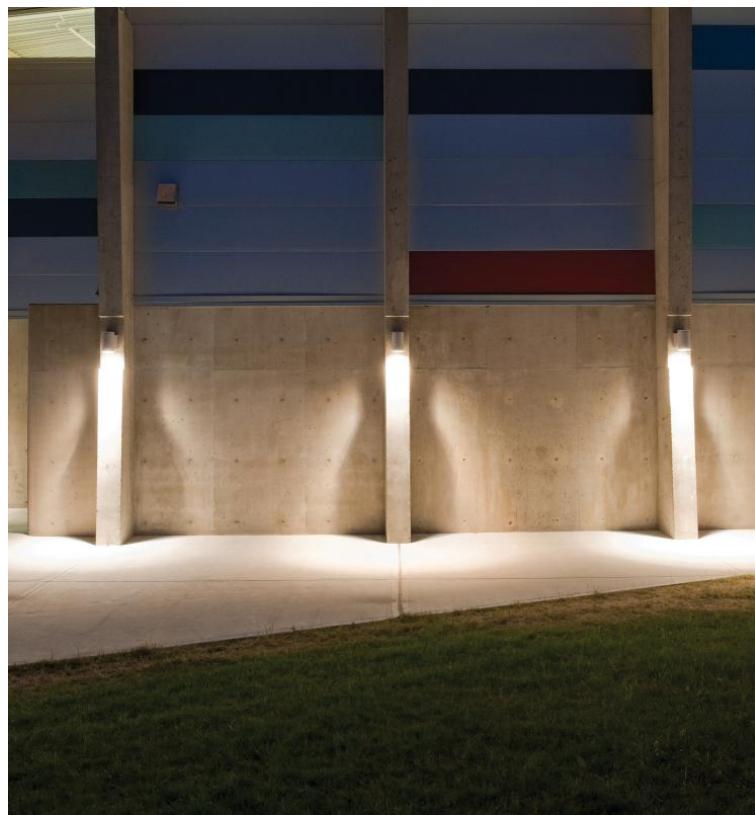

# ONE4TWO™ - MEDIUM - WALL

**ONE4TWO** is a facade light designed with a robust cylindrical aesthetic and engineered with exceptional power in both light output and optical control. Available with two lumen packages with either narrow or medium beams. An internal reflector ensures efficient light distribution allowing the cylinder to be mounted at higher elevations for wayfinding or to accent facade features.

## GENERAL SPECIFICATION

### Housing

Die-cast and extruded aluminium.

### External Screws

Stainless steel.

### Lens

Clear glass.

### Gaskets

One piece silicone.

### Finish

Silver powder coated light gray or black coated as standard.

### Reflector

High purity aluminium, silver anodised.

### Drivers

HPF, electronic for 120-277V (EU-240V).

### Minimum Starting Temperature

-20°C.

### Delivered Lumens

Delivered lumens & LPW based on 3000K (min 80 CRI).

### Weight

Maximum 8.8lb.

### Dark Sky Friendly

Dark Sky Friendly if ordered with 3000K CCT and direct only.

## OPTICS & FEATURES



Ext-Wall Downlight



Ext-Wall Up/Down



10°



35°



Dark Sky Friendly



# ONE4TWO™ - MEDIUM - WALL

## HOW TO ORDER

### A. LUMINAIRE

**267033** 10° up + 35° down, 2098 lms    **267013** 10° up + 10° down, 2098 lms    **267023** 35° up + 35° down, 2098 lms    **267113** 10° down, 1049 lms  
**267123** 35° down, 1049 lms

### B. CCT

**30** 3000K (min 80 CRI)    **40** 4000K (min 80 CRI)

### C. FINISH

**BL** Black Metallic Textured    **GR** Light Gray

### D. DIMMING

**DB** Dimming (0-10V, 10%)<sup>1</sup>

<sup>1</sup> Dimming is equal to less than 10%.

## TECHNICAL DATA

### LUMINAIRE

Code	<b>267033</b>	<b>267013</b>	<b>267023</b>	<b>267113</b>	<b>267123</b>
<b>Power (LED)</b>	2 x 14W	2 x 14W	2 x 14W	14W	14W
<b>Delivered lms</b>	2098	2098	2098	1049	1049
<b>Distribution</b>	10° up + 35° down	10° up + 10° down	35° up + 35° down	10° down	35° down

### FINISH



Black Metallic Textured



Light Gray

### APPROVALS



# ONE4TWO™ - MEDIUM - WALL

## DIMENSIONAL DIAGRAMS

