

ONE4TWO™ - SMALL - WALL

Project Name:	Fixture Type:
Fixture Code:	Quantities:



ONE4TWO™ - SMALL - WALL




ONE4TWO™ - SMALL - WALL

ONE4TWO is a facade light designed with a robust cylindrical aesthetic and engineered with exceptional power in both light output and optical control. Available with two lumen packages with either narrow or medium beams. An internal reflector ensures efficient light distribution allowing the cylinder to be mounted at higher elevations for wayfinding or to accent facade features.

GENERAL SPECIFICATION

Housing Die-cast and extruded aluminium.	External Screws Stainless steel.
Lens Clear glass.	Gaskets One piece silicone.
Reflector High purity aluminium, silver anodised.	Finish Silver powder coated light gray or black coated as standard.
Drivers HPF, electronic for 120-277V (EU-240V).	Minimum Starting Temperature -20°C.
Weight Maximum 8.8lb.	Delivered Lumens Delivered lumens & LPW based on 3000K (min 80 CRI).
Dark Sky Friendly Dark Sky Friendly if ordered with 3000K CCT and direct only.	

OPTICS & FEATURES

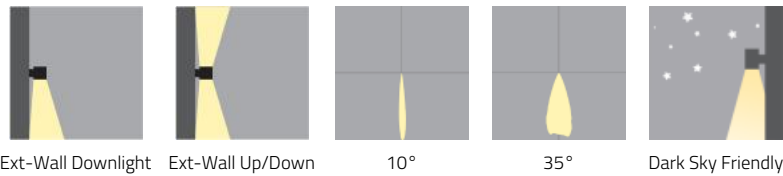

ONE4TWO™ - SMALL - WALL

HOW TO ORDER

A. LUMINAIRE

266033 10° up + 35° down, 932lm	266013 10° up + 10° down, 932lm	266023 35° up + 35° down, 932lm	266113 10° down, 466lm
266123 35° down, 466lm			

B. CCT

30 3000K (min 80 CRI)	40 4000K (min 80 CRI)
------------------------------	------------------------------

C. FINISH

F2 Black Metallic Textured	GR Light Gray
-----------------------------------	----------------------

D. DIMMING

DB 0-10V Dimming (10%) ¹
--


¹ Dimming is equal to or less than 10%.

TECHNICAL DATA

LUMINAIRE

Code	266033	266013	266023	266113	266123
Power (LED)	2 x 6W	2 x 6W	2 x 6W	6W	6W
Delivered lms	932lm	932lm	932lm	466lm	466lm
Distibution	10° up + 35° down	10° up + 10° down	35° up + 35° down	10° down	35° down

FINISH

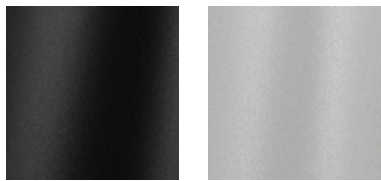

Black Metallic Textured Light Gray

APPROVALS



ONE4TWO™ - SMALL - WALL

DIMENSIONAL DIAGRAMS

