


# 0000H™ - CEILING



Project Name:

Fixture Type:

Fixture Code:

Quantities:

## A. LUMINAIRE

**HLNC1C** Direct, 1300 lm/ft

All data shown at max values based on diffused light diffuser and white louver. Consult Performance Data download page for more detail.  
One power cord for every 50 linear feet.

## B. LENGTH OF RUN

SFA \_ \_ \_ \_

Length of run is 4, 6, 8, 10 or 12 feet only, not available as a continuous run.

## C. LENGTH

**SL04** 4ft

**SL06** 6ft

**SL08** 8ft

**SL10** 10ft

**SL12** 12ft

## D. LOUVER

**LV2** Black

**LV3** White

**LV4** Satin Chrome

**LV6** Satin Gold

**LV9** Satin Champagne

## E. LM/FT

**LPF020** 200 lm/ft

**LPF030** 300 lm/ft

**LPF040** 400 lm/ft

**LPF050** 500 lm/ft

**LPF060** 600 lm/ft

**LPF070** 700 lm/ft

**LPF080** 800 lm/ft

**LPF100** 1000 lm/ft

**LPF120** 1200 lm/ft

**LPF130** 1300 lm/ft

Lumens/ft are determined by the color of the Louver. Consult website for available lumens/ft based on selected louver.

## F. CRI

**CR80** CRI 80+

**CR90** CRI 90+

## G. CCT

**CTA30** 3000K

**CTA35** 3500K

**CTA40** 4000K

## H. DIFFUSER

**DD1** Asymmetric diffuser

**DD4** Comfort Diffuser

<sup>1</sup> When standing at the end view of the profile on the side where the power cord is installed, the asymmetric beam will aim to the right.

## I. VOLTAGE

**V1** 120/277V

**V2** 240V <sup>1</sup>

**V3** 347V <sup>2</sup>

**V4** Low Voltage <sup>3</sup>

<sup>1</sup> Not available in North America.

<sup>2</sup> Only available with DA01 dimming.

<sup>3</sup> Only available with DA45 dimming.



# 0000H™ - CEILING

## J. DIMMING

**DA01** 0-10V Dimming 1.0%

**DA02** 0-10V Dimming 0.1% <sup>1</sup>

**DA20** DALI Dimming 0.1% <sup>1</sup>

**DA21** DALI Dimming 1.0% <sup>1</sup>

**DA30** DSI/switchDim <sup>2</sup>

**DA45** PoE <sup>3</sup>

<sup>1</sup> Not available with V3.

<sup>2</sup> Not available in North America.

<sup>3</sup> Only available with V4.

## K. FIXTURE FINISH

**FA01** White

**FA02** Black Metallic - Textured

**FA20** Silver Metallic - Textured

**FA25** Gold Metallic - Textured

**FA27** Wood grain - Light Cherry <sup>1</sup>

**FA28** Wood grain - Dark Walnut <sup>1</sup>

**FA44** Midnight Blue Metallic - Textured

**FA45** Copper Metallic

**FA46** Charcoal Metallic - Textured

**FA47** Bronze Metallic - Textured

**FA52** Champagne Metallic

**FA53** Red Metallic - Textured

<sup>1</sup> Longer than normal lead times may apply, consult factory.

## L. QUANTITY OF EMERGENCY SECTIONS

**E0** Not required

**E1** Emergency system - Integral


**E3** Emergency generator circuit <sup>1</sup>

<sup>1</sup> Not available with 347V.



# 0000H™ - CEILING

## DIMENSIONAL DIAGRAMS

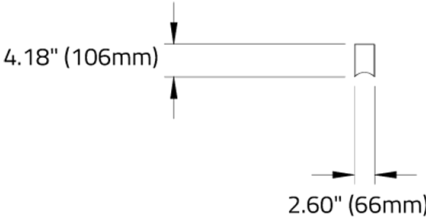

BOTTOM VIEW (LOUVER)

Top View  
(Asymmetric Light Direction)

