

# 0000H KURL™ - SUSPENDED

Project Name:



Fixture Type:

Fixture Code:

Quantities:



# 0000H KURL™ - SUSPENDED

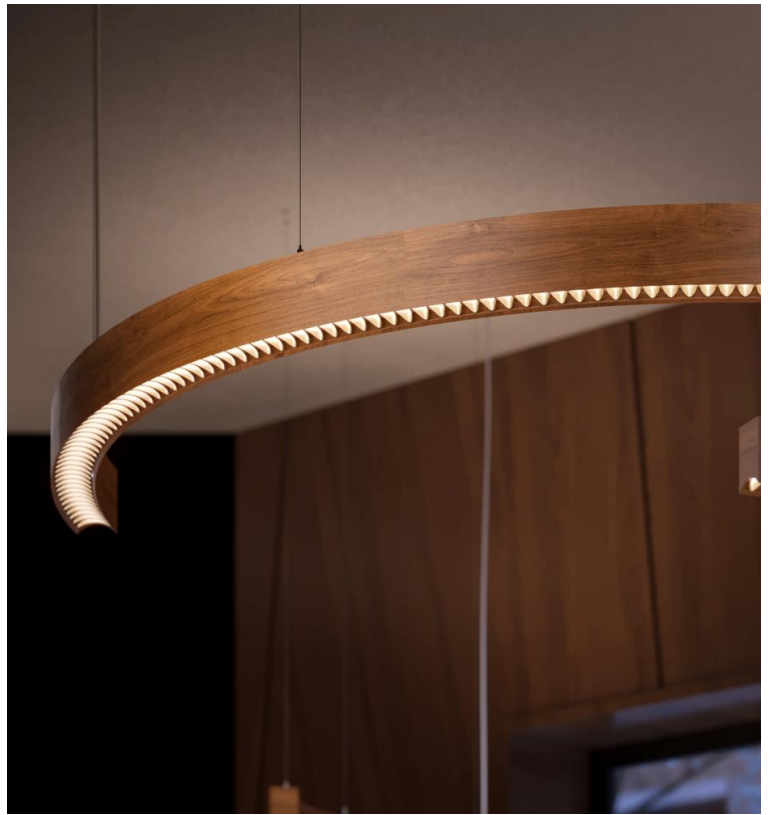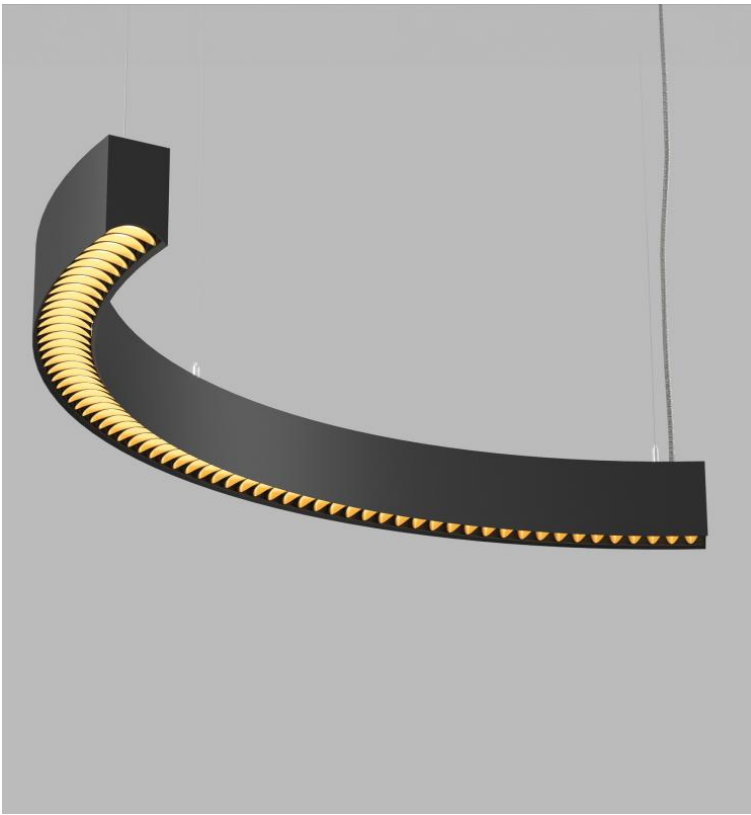

# 0000H KURL™ - SUSPENDED

A pendant of whimsical charm, **0000H KURL** exudes sophistication. Adorned with luxurious ellipsoidal louvers, the distinctive arcs, available in 6 sizes, infuse an enchanting aesthetic into your space while casting a sublime lighting effect. Depart from the ordinary as **0000H KURL's** louvers not only minimize glare for enhanced visual comfort but also serve as a captivating decorative feature. Choose from five distinct louver finishes – Black for superior glare control, White for heightened reflectance, and Satin Chrome, Satin Gold, and Satin Champagne for an interior design enhancement. **0000H KURL** goes beyond convention, offering a refined lighting experience that seamlessly blends style and functionality, transforming your design into a haven of contemporary elegance.

## GENERAL SPECIFICATION

### Body

Aluminum.

### Suspension

Steel cables.

### Mechanical

Luminaires mount directly over J box (by others).

### Delivered lumens

Delivered lumens & LPW based on 4000K CRI 80+.

### Remote Emergency

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch (NA only) Maximum distance between wall/ceiling plate and luminaire is 15' (4.5m). Test switch fits a single gang box (not supplied).

### Reported L70 @25°C (77°F)

> 102,000 hrs @ 2000 lumens/ft (6000 lumens/m).

### Approvals

Damp Rated.

### Finish

Powder coated.

### Power cable

Silver braided.

### Sensors

Consult factory regarding sensor compatibility.

### Diffuser

Opal polycarbonate.

### Drivers

HPF electronic drivers for 120-277V, 347V (EU-240V). Drivers are either remote mounted or integral to the canopy depending on the size of the fixture.


### Estimated L70 @25°C (77°F)

> 178,000 hrs @ 2000 lumens/ft (6000 lumens/m).


### Design

US Patent Pending.


## MOUNTING & OPTICS




Suspended Direct




Suspended Direct/Indirect



Direct



Indirect



Declare



# 0000H KURL™ - SUSPENDED

## HOW TO ORDER

### A. LUMINAIRE

<b>HLKP1P01</b> 18" Radius, 120° Arc Direct	<b>HLKP1P02</b> 30" Radius, 120° Arc Direct	<b>HLKP1P03</b> 42" Radius, 120° Arc Direct	<b>HLKP1P04</b> 18" Radius, 240° Arc Direct
<b>HLKP1P05</b> 30" Radius, 240° Arc Direct	<b>HLKP1P06</b> 42" Radius, 240° Arc Direct	<b>HLKP2P01</b> 18" Radius, 120° Arc Direct/Indirect	<b>HLKP2P02</b> 30" Radius, 120° Arc Direct/Indirect
<b>HLKP2P03</b> 42" Radius, 120° Arc Direct/Indirect	<b>HLKP2P04</b> 18" Radius, 240° Arc Direct/Indirect	<b>HLKP2P05</b> 30" Radius, 240° Arc Direct/Indirect	<b>HLKP2P06</b> 42" Radius, 240° Arc Direct/Indirect

All data shown based on max values and white body with white louver.  
Longer than normal lead-times may apply, consult factory.

### B. LOUVERS

<b>LV2</b> Black	<b>LV3</b> White	<b>LV4</b> Satin Chrome	<b>LV6</b> Satin Gold
<b>LV9</b> Satin Champagne			

### C. LUMENS (DIRECT)

<b>LPF020</b> 200 lm/ft	<b>LPF030</b> 300 lm/ft	<b>LPF040</b> 400 lm/ft	<b>LPF050</b> 500 lm/ft
<b>LPF070</b> 700 lm/ft	<b>LPF090</b> 900 lm/ft		

Lumens/ft are determined by the color of the Louver. Consult website for available lumens/ft based on selected louver.

### D. LUMENS (INDIRECT)

<b>LPG000</b> Not required	<b>LPG030</b> 300 lm/ft	<b>LPG050</b> 500 lm/ft	<b>LPG070</b> 700 lm/ft
<b>LPG090</b> 900 lm/ft	<b>LPG110</b> 1100 lm/ft		

### E. CRI

<b>CR80</b> CRI 80+	<b>CR90</b> CRI 90+
---------------------	---------------------

### F. CCT

<b>CTA30</b> 3000K	<b>CTA35</b> 3500K	<b>CTA40</b> 4000K
--------------------	--------------------	--------------------

### G. UPPER DIFFUSER

<b>UD0</b> Not required	<b>UD2</b> Opal diffuser
-------------------------	--------------------------

### H. VOLTAGE

<b>V1</b> 120/277V	<b>V2</b> 240V <sup>1</sup>	<b>V3</b> 347V <sup>2</sup>
--------------------	-----------------------------	-----------------------------

<sup>1</sup> Not available in North America.

<sup>2</sup> Only available with DA01.

### I. DIMMING (REMOTE ONLY)

<b>DA01</b> 0-10V Dimming 1.0%	<b>DA02</b> 0-10V Dimming 0.1% <sup>1</sup>	<b>DA20</b> DALI Dimming 0.1% <sup>1</sup>	<b>DA21</b> DALI Dimming 1.0% <sup>1</sup>
<b>DA30</b> DSI/switchDim <sup>2</sup>			

All drivers are remote only.

<sup>1</sup> Not available with V3.

<sup>2</sup> Not available in North America.



# 0000H KURL™ - SUSPENDED

## J. SUSPENSION

**SS1** Vertical, Remote driver

---

<sup>1</sup> Not available with HPNP2P07.

## K. FIXTURE FINISH

**FA01** White

**FA02** Black Metallic - Textured

**FA20** Silver Metallic - Textured

**FA25** Gold Metallic - Textured

**FA27** Wood grain - Light Cherry <sup>1</sup>

**FA28** Wood grain - Dark Walnut <sup>1</sup>

**FA44** Midnight Blue Metallic - Textured

**FA45** Copper Metallic

**FA46** Charcoal Metallic - Textured

**FA47** Bronze Metallic - Textured

**FA52** Champagne Metallic

**FA53** Red Metallic - Textured

---

<sup>1</sup> Longer than normal lead times may apply, consult factory.

## L. CANOPY FINISH

**CF01** White

**CF02** Black Metallic - Textured

**CF20** Silver Metallic - Textured

**CF25** Gold Metallic - Textured

**CF44** Midnight Blue Metallic - Textured

**CF45** Copper Metallic

**CF46** Charcoal Metallic - Textured

**CF47** Bronze Metallic - Textured

**CF52** Champagne Metallic

**CF53** Red Metallic - Textured

## M. EMERGENCY

**E0** Not required

**E2** Emergency system - Remote

## N. CIRCUIT

**CS1** Single circuit

**CS2** Dual circuit

## O. CONTROLS

**C0** Not required

**C1** Encelium/Zigbee



# 0000H KURL™ - SUSPENDED

## TECHNICAL DATA

### LUMINAIRE

All data shown based on max values and white body with white louver.  
 Longer than normal lead-times may apply, consult factory.

Code	HLKP1P01	HLKP1P02	HLKP1P03	HLKP1P04	HLKP1P05	HLKP1P06
<b>Radius/Arc</b>	18" Radius/120° Arc	30" Radius/120° Arc	42" Radius/120° Arc	18" Radius/240° Arc	30" Radius/240° Arc	42" Radius/240° Arc
<b>Light Direction</b>	Direct	Direct	Direct	Direct	Direct	Direct
<b>Wattage</b>	27	45	60	54	91	121
<b>Direct lms</b>	2700	4300	5900	5400	8700	12000
<b>Indirect lms</b>						
<b>LPW</b>	99	96	99	99	96	99


Code	HLKP2P01	HLKP2P02	HLKP2P03	HLKP2P04	HLKP2P05	HLKP2P06
<b>Radius/Arc</b>	18" Radius/120° Arc	30" Radius/120° Arc	42" Radius/120° Arc	18" Radius/240° Arc	30" Radius/240° Arc	42" Radius/240° Arc
<b>Light Direction</b>	Direct/Indirect	Direct/Indirect	Direct/Indirect	Direct/Indirect	Direct/Indirect	Direct/Indirect
<b>Wattage</b>	52	87	115	103	175	229
<b>Direct lms</b>	2700	4300	5900	5400	8700	12000
<b>Indirect lms</b>	3700	6200	8000	7500	12500	16100
<b>LPW</b>	125	121	123	125	121	123

### LOUVERS



Black      White      Satin Chrome      Satin Gold      Satin Champagne

### FIXTURE FINISH

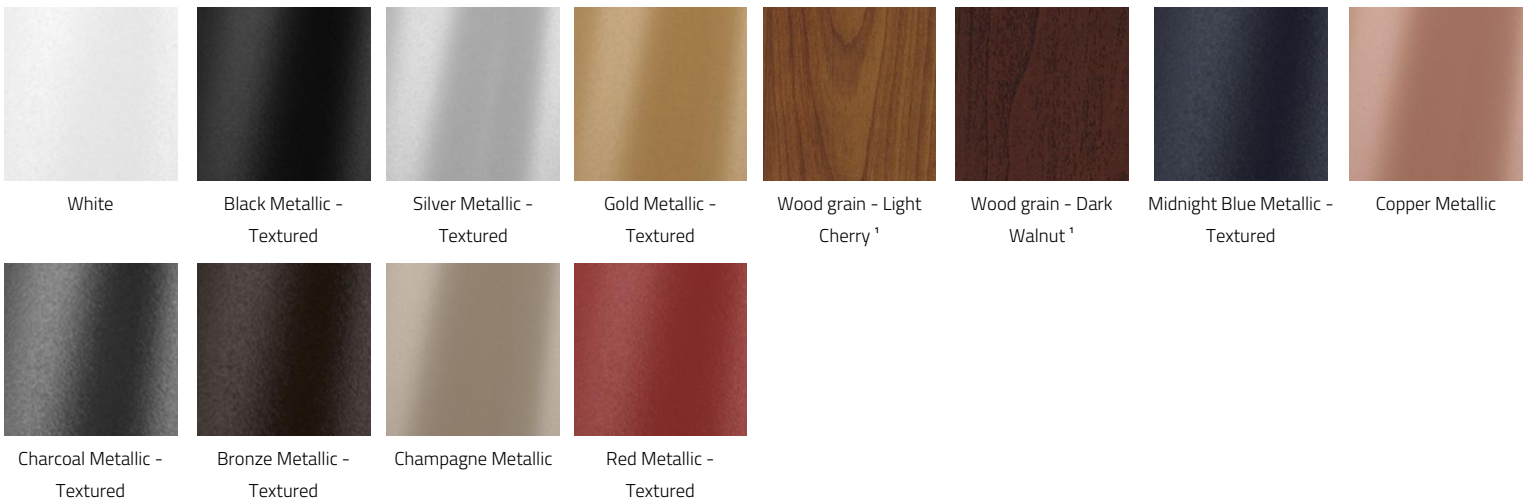

White      Black Metallic - Textured      Silver Metallic - Textured      Gold Metallic - Textured      Wood grain - Light Cherry<sup>1</sup>      Wood grain - Dark Walnut<sup>1</sup>      Midnight Blue Metallic - Textured      Copper Metallic

Charcoal Metallic - Textured      Bronze Metallic - Textured      Champagne Metallic      Red Metallic - Textured


<sup>1</sup> Longer than normal lead times may apply, consult factory.

# 0000H KURL™ - SUSPENDED

## CANOPY FINISH



White




Black Metallic -  
Textured




Silver Metallic -  
Textured




Gold Metallic -  
Textured



Midnight Blue Metallic -  
Textured



Copper Metallic



Charcoal Metallic -  
Textured



Bronze Metallic -  
Textured



Champagne Metallic



Red Metallic -  
Textured

## APPROVALS



DAMP  
LOCATION




IP20

# 0000H KURL™ - SUSPENDED

## PERFORMANCE DATA

### DIRECT COMFORT (DD4) - WHITE LOUVER

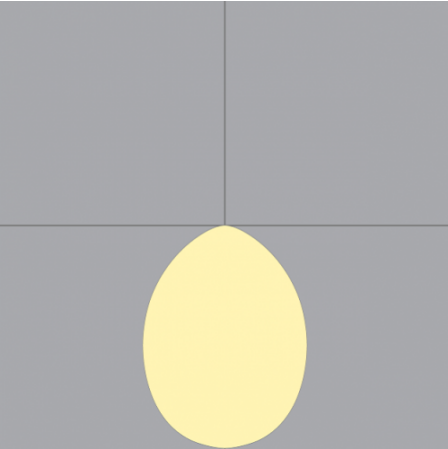


LUMEN/FT
900
700
500
400
300
200

WATT/FT
9
7
5
4
3
2

LPW
98
101
105
107
110
113

### DIRECT COMFORT (DD4) - BLACK LOUVER

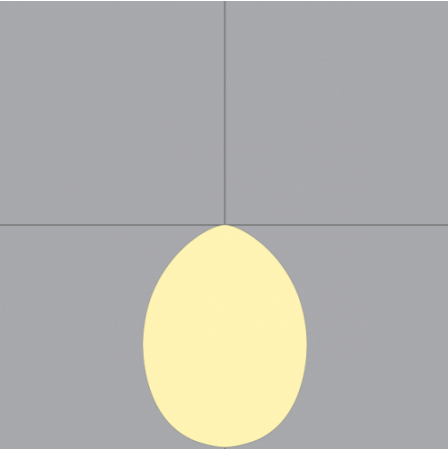


LUMEN/FT
500
400
300
200

WATT/FT
9
7
5
4

LPW
58
60
62
63

### DIRECT COMFORT (DD4) - SATIN CHROME LOUVER

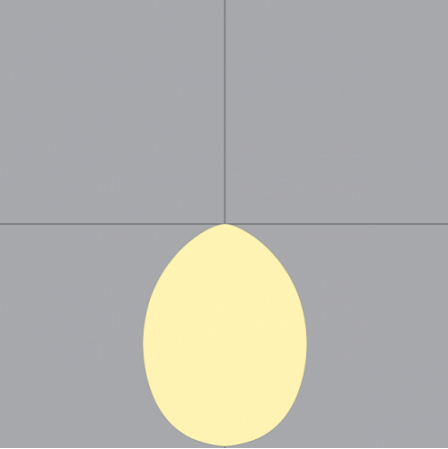

LUMEN/FT
700
500
400
300
200

WATT/FT
9
7
5
4
3

LPW
78
80
83
84
87




# 0000H KURL™ - SUSPENDED

## DIRECT COMFORT (DD4) - SATIN GOLD LOUVER

### LUMEN/FT

### WATT/FT

### LPW

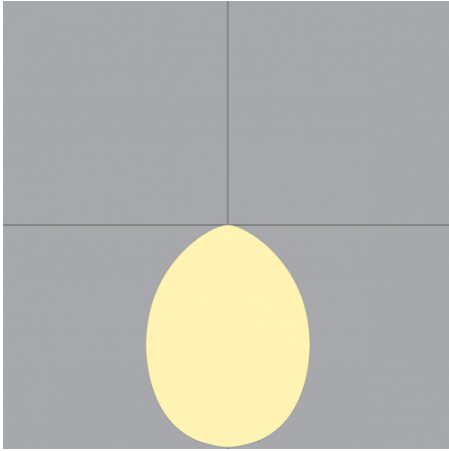

700
500
400
300
200

9
7
5
4
3


76
78
81
83
85

## DIRECT COMFORT (DD4) - SATIN CHAMPAGNE LOUVER

### LUMEN/FT

### WATT/FT

### LPW

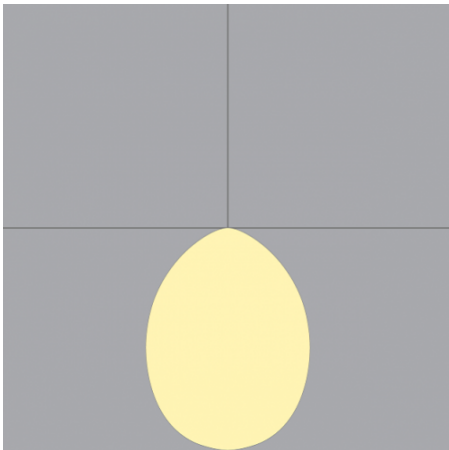

700
500
400
300
200

9
7
5
4
3


78
80
83
84
87

## INDIRECT OPAL (UD2)

### LUMEN/FT

### WATT/FT

### LPW

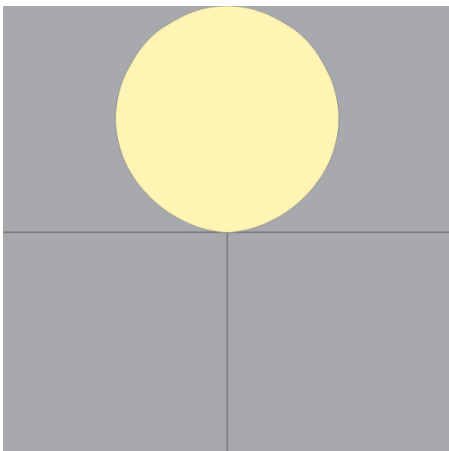

1100
900
700
500
300

9
7
5
4
3


151
153
158
161
171

# 0000H KURL™ - SUSPENDED


## DIMENSIONAL DIAGRAMS

### 0000H Kurl


#### 18" Radius

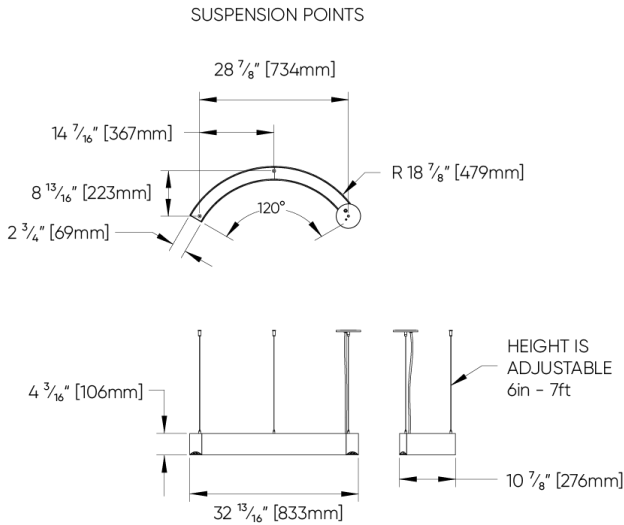

#### 30" Radius

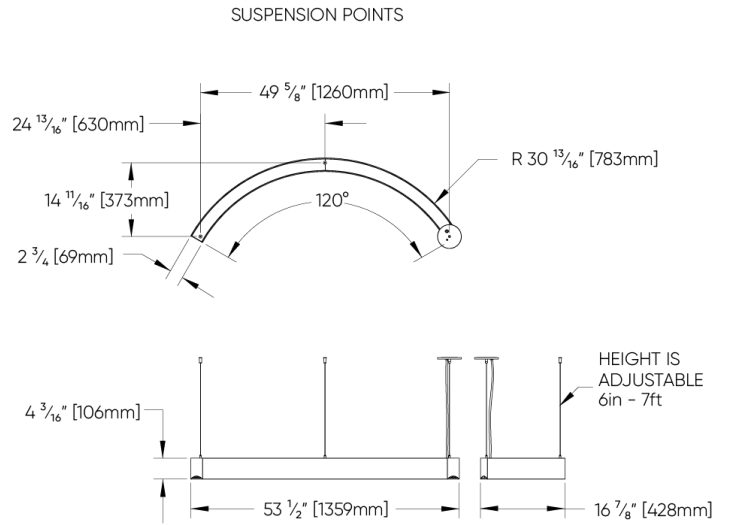


#### 42" Radius

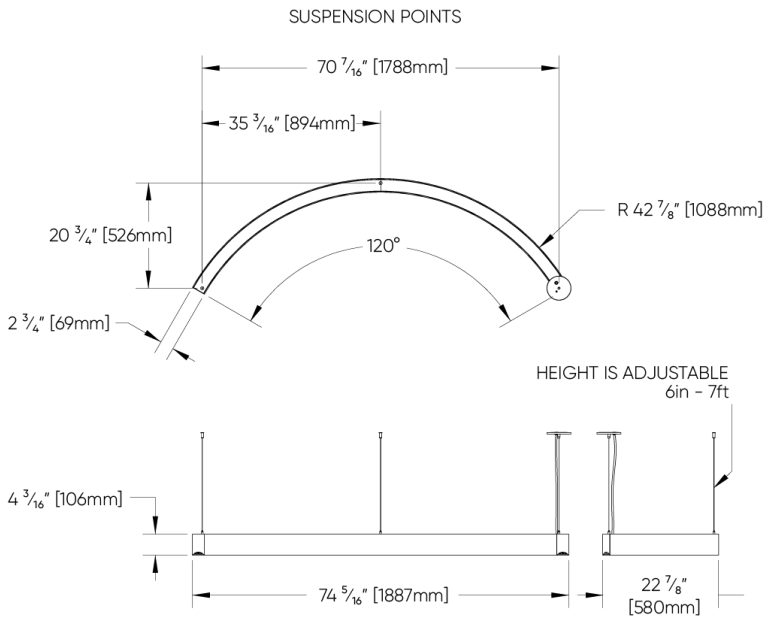


# 0000H KURL™ - SUSPENDED

## 0000H Kurl

### 18" Radius

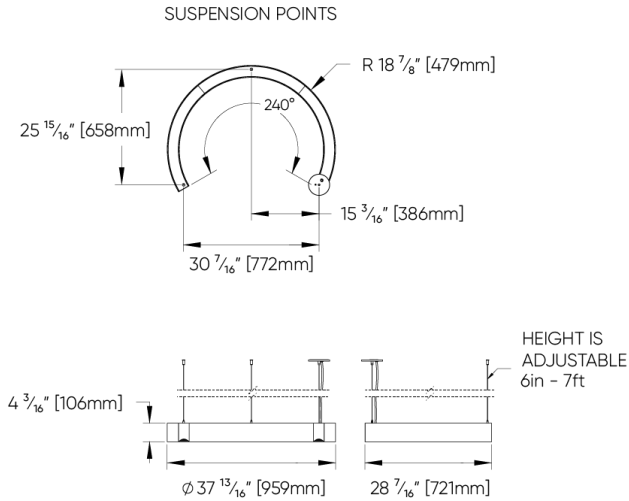

### 30" Radius

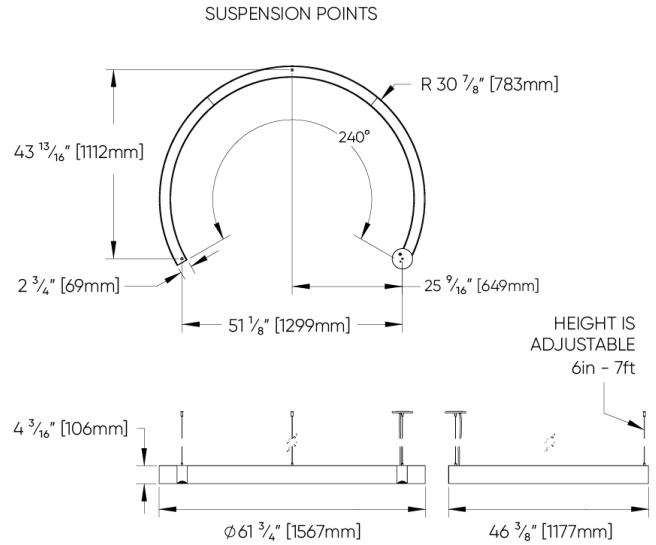

### 42" Radius

