






# OOOOH KURL™


## FULL SPECIFICATION SHEET

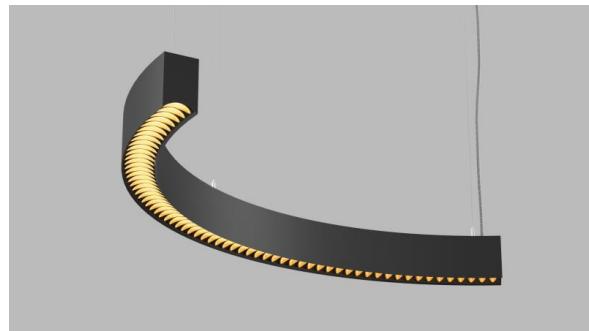

Fixture Type



Fixture Code




Quantities

### 1 DESCRIPTION

A pendant of whimsical charm, **OOOOH KURL** exudes sophistication. Adorned with luxurious ellipsoidal louvers, the distinctive arcs, available in 6 sizes, infuse an enchanting aesthetic into your space while casting a sublime lighting effect. Depart from the ordinary as **OOOOH KURL**'s louvers not only minimize glare for enhanced visual comfort but also serve as a captivating decorative feature. Choose from five distinct louver finishes – Black for superior glare control, White for heightened reflectance, and Satin Chrome, Satin Gold, and Satin Champagne for an interior design enhancement. **OOOOH KURL** goes beyond convention, offering a refined lighting experience that seamlessly blends style and functionality, transforming your design into a haven of contemporary elegance.

### 2 OPTICS & FEATURES

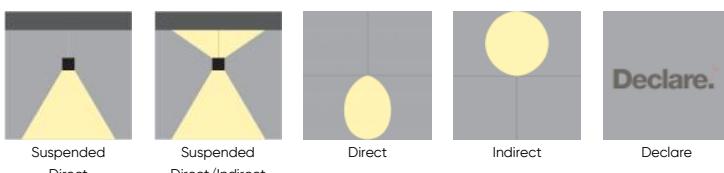

Suspended  
Direct

Suspended  
Direct/Indirect

Direct

Indirect

Declare.

### 3 APPROVALS



**4 GENERAL SPECIFICATION****BODY**

Aluminum.

**SUSPENSION**

Steel cables.

**MECHANICAL**

Luminaires mount directly over J box (by others).

**DELIVERED LUMENS**

Delivered lumens & LPW based on 4000K CRI 80+.

**REMOTE EMERGENCY**

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch (NA only) Maximum distance between wall/ceiling plate and luminaire is 15' (4.5m). Test switch fits a single gang box (not supplied).

**REPORTED L70 @25°C (77°F)**

> 102,000 hrs @ 2000 lumens/ft (6000 lumens/m).

**APPROVALS**

Damp Rated.

**SEISMIC BRACING**

Seismic bracing kits are available to meet compliance requirements. Consult the factory for details.

**FINISH**

Powder coated.

**POWER CABLE**

Silver braided.

**SENSORS**

Consult factory regarding sensor compatibility.

**LENS**

Opal polycarbonate.

**DRIVERS**

HPF electronic drivers for 120-277V, 347V (EU-240V). Drivers are either remote mounted or integral to the canopy depending on the size of the fixture. For longer remote distances, consult factory.

**ESTIMATED L70 @25°C (77°F)**


> 178,000 hrs @ 2000 lumens/ft (6000 lumens/m).

**DESIGN**

US Patent Pending.

**5 DESIGN OPTIONS****LOUVERS****Fixture Finish**

<sup>1</sup> Wood grain finishes may incur longer lead times and setup charges. Consult factory for details.

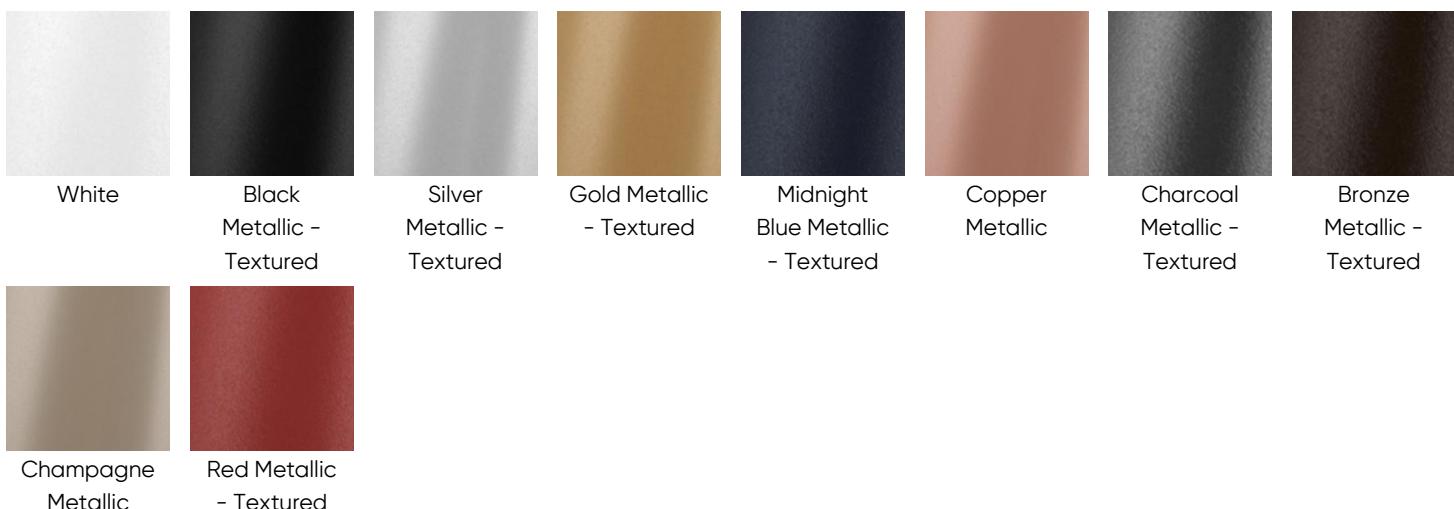**Canopy Finish**

**6 HOW TO ORDER****1. LUMINAIRE**

<b>HLKP1P01</b> 18" Radius, 120° Arc Direct	<b>HLKP1P02</b> 30" Radius, 120° Arc Direct	<b>HLKP1P03</b> 42" Radius, 120° Arc Direct	<b>HLKP1P04</b> 18" Radius, 240° Arc Direct
<b>HLKP1P05</b> 30" Radius, 240° Arc Direct	<b>HLKP1P06</b> 42" Radius, 240° Arc Direct	<b>HLKP2P01</b> 18" Radius, 120° Arc Direct/Indirect	<b>HLKP2P02</b> 30" Radius, 120° Arc Direct/Indirect
<b>HLKP2P03</b> 42" Radius, 120° Arc Direct/Indirect	<b>HLKP2P04</b> 18" Radius, 240° Arc Direct/Indirect	<b>HLKP2P05</b> 30" Radius, 240° Arc Direct/Indirect	<b>HLKP2P06</b> 42" Radius, 240° Arc Direct/Indirect

All data shown based on max values and white body with white louver. Longer than normal lead-times may apply, consult factory.

**2. LOUVERS**

<b>LV2</b> Black	<b>LV3</b> White	<b>LV4</b> Satin Chrome	<b>LV6</b> Satin Gold
<b>LV9</b> Satin Champagne			

**3. LUMENS (DIRECT)**

<b>LPF020</b> 200 lm/ft	<b>LPF030</b> 300 lm/ft	<b>LPF040</b> 400 lm/ft	<b>LPF050</b> 500 lm/ft
<b>LPF070</b> 700 lm/ft	<b>LPF090</b> 900 lm/ft		

Lumens/ft are determined by the color of the Louver. Consult website for available lumens/ft based on selected louver.

**4. LUMENS (INDIRECT)**

<b>LPG000</b> Not required	<b>LPG030</b> 300 lm/ft	<b>LPG050</b> 500 lm/ft	<b>LPG070</b> 700 lm/ft
<b>LPG090</b> 900 lm/ft	<b>LPG110</b> 1100 lm/ft		

**5. CRI**

<b>CR80</b> CRI 80+	<b>CR90</b> CRI 90+
---------------------	---------------------

**6. CCT**

<b>CTA30</b> 3000K	<b>CTA35</b> 3500K	<b>CTA40</b> 4000K
--------------------	--------------------	--------------------

**7. INDIRECT LENS**

<b>UD0</b> Not required	<b>UD2</b> Opal
-------------------------	-----------------

**8. VOLTAGE**

<b>V1</b> 120/277V	<b>V2</b> 240V <sup>1</sup>	<b>V3</b> 347V <sup>2</sup>
--------------------	-----------------------------	-----------------------------

<sup>1</sup> Not available in North America. <sup>2</sup> Only available with DA01.

## 9. DIMMING (REMOTE ONLY)

**DA01** 0-10V Dimming 1.0%      **DA02** 0-10V Dimming 0.1% <sup>1</sup>      **DA20** DALI Dimming 0.1% <sup>1</sup>      **DA21** DALI Dimming 1.0% <sup>1</sup>  
**DA30** DSI/switchDim <sup>2</sup>

All drivers are remote only.

<sup>1</sup> Not available with V3. <sup>2</sup> Not available in North America.

## 10. SUSPENSION

**SS1** Vertical, Remote driver

<sup>1</sup> Not available with HPNP2P07.

## 11. FIXTURE FINISH

<b>FA01</b> White	<b>FA02</b> Black Metallic - Textured	<b>FA20</b> Silver Metallic - Textured	<b>FA25</b> Gold Metallic - Textured
<b>FA27</b> Wood grain - Light Cherry <sup>1</sup>	<b>FA28</b> Wood grain - Dark Walnut <sup>1</sup>	<b>FA30</b> Wood grain - White Oak <sup>1</sup>	<b>FA44</b> Midnight Blue Metallic - Textured
<b>FA45</b> Copper Metallic	<b>FA46</b> Charcoal Metallic - Textured	<b>FA47</b> Bronze Metallic - Textured	<b>FA52</b> Champagne Metallic
<b>FA53</b> Red Metallic - Textured			

<sup>1</sup> Wood grain finishes may incur longer lead times and setup charges. Consult factory for details.

## 12. CANOPY FINISH

<b>CF01</b> White	<b>CF02</b> Black Metallic - Textured	<b>CF20</b> Silver Metallic - Textured	<b>CF25</b> Gold Metallic - Textured
<b>CF44</b> Midnight Blue Metallic - Textured	<b>CF45</b> Copper Metallic	<b>CF46</b> Charcoal Metallic - Textured	<b>CF47</b> Bronze Metallic - Textured
<b>CF52</b> Champagne Metallic	<b>CF53</b> Red Metallic - Textured		

## 13. EMERGENCY

**E0** Not required      **E2** Emergency system - Remote

## 14. CIRCUIT

**CS1** Single circuit      **CS2** Dual circuit

## 15. CONTROLS

**C0** Not required      **C1** Encelium/Zigbee

**7 TECHNICAL DATA**
**LUMINAIRE**

All data shown based on max values and white body with white louver. Longer than normal lead-times may apply, consult factory.

<b>Code</b>	<b>HLKP1P01</b>	<b>HLKP1P02</b>	<b>HLKP1P03</b>	<b>HLKP1P04</b>	<b>HLKP1P05</b>	<b>HLKP1P06</b>
<b>Radius/Arc</b>	18" Radius/120° Arc	30" Radius/120° Arc	42" Radius/120° Arc	18" Radius/240° Arc	30" Radius/240° Arc	42" Radius/240° Arc
<b>Light Direction</b>	Direct	Direct	Direct	Direct	Direct	Direct
<b>Wattage</b>	27	45	60	54	91	121
<b>Direct lms</b>	2700	4300	5900	5400	8700	12000
<b>Indirect lms</b>						
<b>LPW</b>	99	96	99	99	96	99
<b>Code</b>	<b>HLKP2P01</b>	<b>HLKP2P02</b>	<b>HLKP2P03</b>	<b>HLKP2P04</b>	<b>HLKP2P05</b>	<b>HLKP2P06</b>
<b>Radius/Arc</b>	18" Radius/120° Arc	30" Radius/120° Arc	42" Radius/120° Arc	18" Radius/240° Arc	30" Radius/240° Arc	42" Radius/240° Arc
<b>Light Direction</b>	Direct/Indirect	Direct/Indirect	Direct/Indirect	Direct/Indirect	Direct/Indirect	Direct/Indirect
<b>Wattage</b>	52	87	115	103	175	229
<b>Direct lms</b>	2700	4300	5900	5400	8700	12000
<b>Indirect lms</b>	3700	6200	8000	7500	12500	16100
<b>LPW</b>	125	121	123	125	121	123

**8 PERFORMANCE DATA**

**DIRECT COMFORT (DD4) –  
WHITE LOUVER**

LUMEN/FT	WATT/FT	LPW
900	9	98
700	7	101
500	5	105
400	4	107
300	3	110
200	2	113

**DIRECT COMFORT (DD4) –  
BLACK LOUVER**

LUMEN/FT	WATT/FT	LPW
500	9	58
400	7	60
300	5	62
200	4	63

**DIRECT COMFORT (DD4) –  
SATIN CHROME LOUVER**

LUMEN/FT	WATT/FT	LPW
700	9	78
500	7	80
400	5	83
300	4	84
200	3	87

**DIRECT COMFORT (DD4) –  
SATIN GOLD LOUVER**

LUMEN/FT	WATT/FT	LPW
700	9	76
500	7	78
400	5	81
300	4	83
200	3	85

**DIRECT COMFORT (DD4) –  
SATIN CHAMPAGNE LOUVER**

LUMEN/FT	WATT/FT	LPW
700	9	78
500	7	80
400	5	83
300	4	84
200	3	87


**INDIRECT OPAL (UD2)**

LUMEN/FT	WATT/FT	LPW
1100	9	151
900	7	153
700	5	158
500	4	161
300	3	171


**9 DIMENSIONAL DIAGRAMS**

**OOOOH Kurl**


**18" Radius**

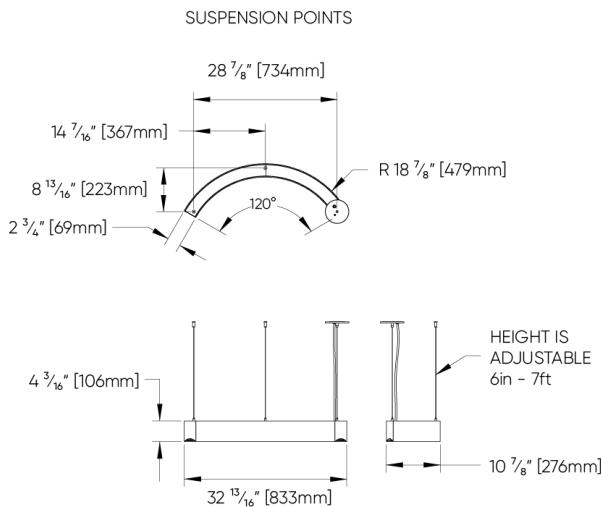

**30" Radius**


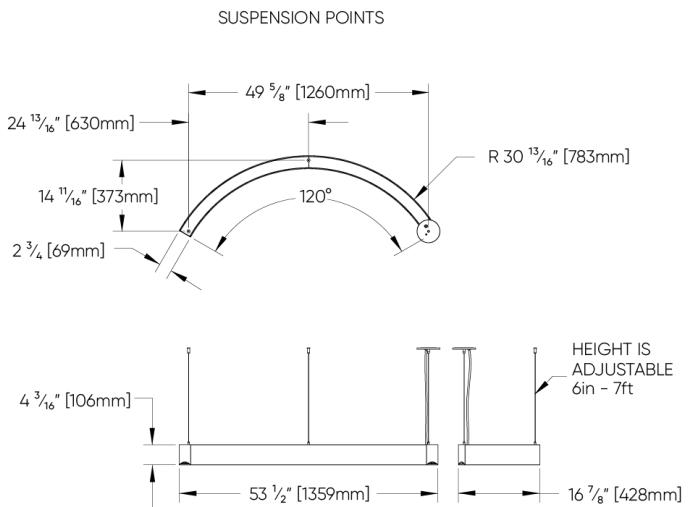


**42" Radius**


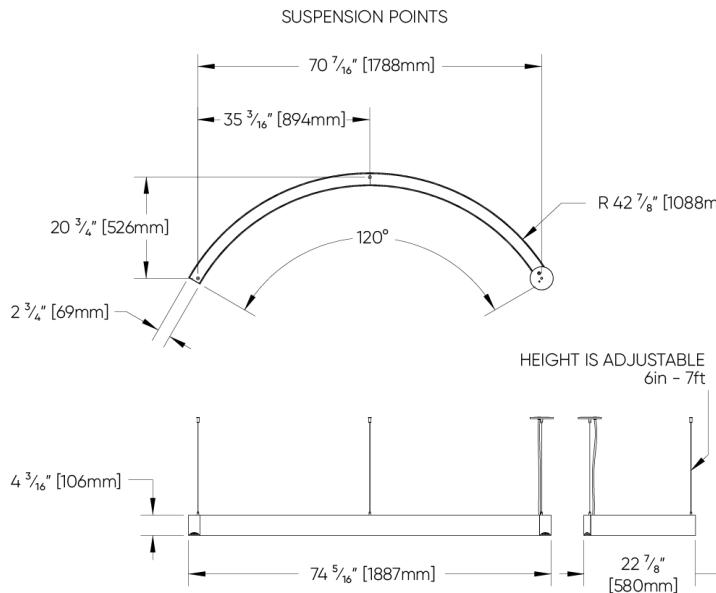


## OOOOH Kurl


### 18" Radius

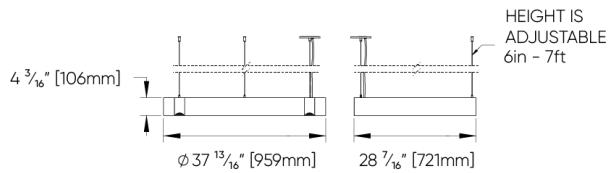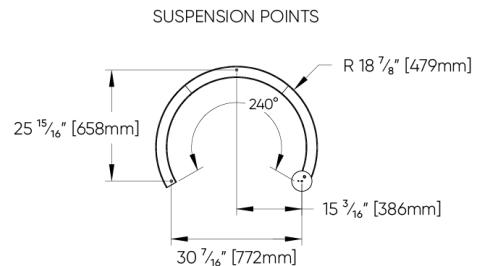

### 30" Radius

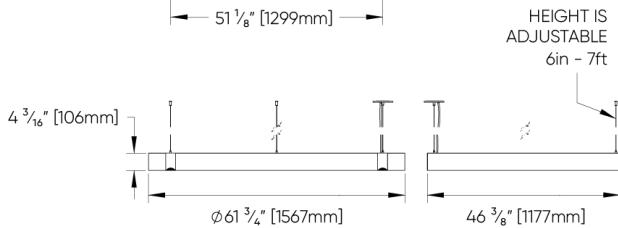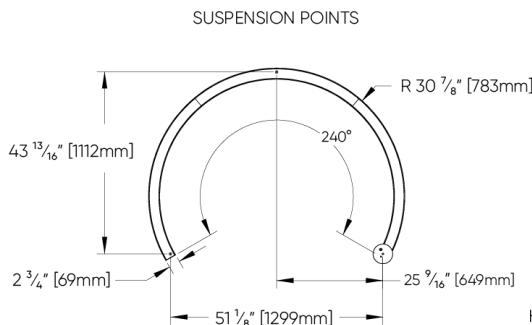

### 42" Radius

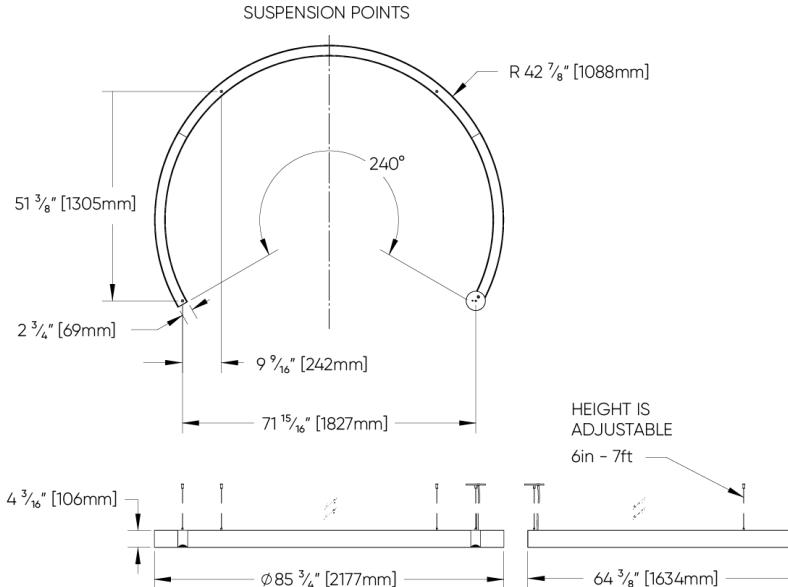

HEIGHT IS  
ADJUSTABLE  
6in - 7ft

