






# OOOOH KURL™


## FULL SPECIFICATION SHEET

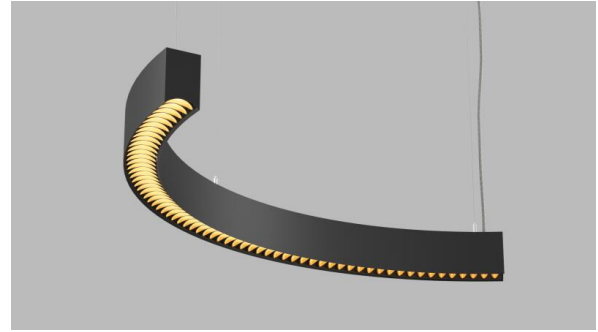

FIXTURE TYPE



FIXTURE CODE




QUANTITIES

### 1 DESCRIPTION

A pendant of whimsical charm, **OOOOH KURL** exudes sophistication. Adorned with luxurious ellipsoidal louvers, the distinctive arcs, available in 6 sizes, infuse an enchanting aesthetic into your space while casting a sublime lighting effect. Depart from the ordinary as **OOOOH KURL's** louvers not only minimize glare for enhanced visual comfort but also serve as a captivating decorative feature. Choose from five distinct louver finishes – Black for superior glare control, White for heightened reflectance, and Satin Chrome, Satin Gold, and Satin Champagne for an interior design enhancement. **OOOOH KURL** goes beyond convention, offering a refined lighting experience that seamlessly blends style and functionality, transforming your design into a haven of contemporary elegance.

### 2 OPTICS & FEATURES

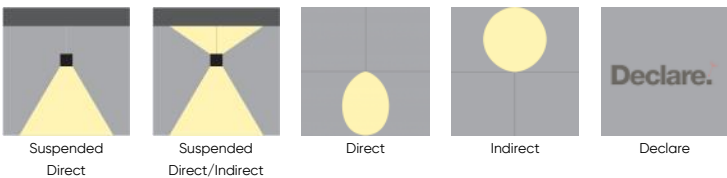

### 3 APPROVALS



**4** GENERAL SPECIFICATION

**BODY**

Aluminum.

**SUSPENSION**

Steel cables.

**MECHANICAL**

Luminaires mount directly over J box (by others).

**DELIVERED LUMENS**

Delivered lumens & LPW based on 4000K CRI 80+.

**REMOTE EMERGENCY**

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch (NA only) Maximum distance between wall/ceiling plate and luminaire is 15' (4.5m). Test switch fits a single gang box (not supplied).

**REPORTED L70 @25°C (77°F)**

> 102,000 hrs @ 2000 lumens/ft (6000 lumens/m).

**APPROVALS**

Damp Rated.

**SEISMIC BRACING**

Seismic bracing kits are available to meet compliance requirements. Consult the factory for details.

**FINISH**

Powder coated.

**POWER CABLE**

Silver braided.

**SENSORS**

Consult factory regarding sensor compatibility.

**LENS**

Opal polycarbonate.

**DRIVERS**

Remote, HPF electronic drivers for 120-277V, 347V (EU-240V) dimming. Wire size 18 AWG – max distance (from fixture to drivers) 40' (12.2m), wire size 16 AWG – max distance 60' (18.3m), wire size 14 AWG – max distance 90' (27.4m). Drivers must be accessible after installation. Drivers are either remote mounted or integral to the canopy depending on the size of the fixture. For longer remote distances, consult factory.

**ESTIMATED L70 @25°C (77°F)**

> 178,000 hrs @ 2000 lumens/ft (6000 lumens/m).

**DESIGN**


US Patent Pending.

**SUSTAINABILITY**


Designed for on-site LED board, driver, and optic replacement. Contact the factory for maintenance documentation.

**5 DESIGN OPTIONS**

**LOUVERS**

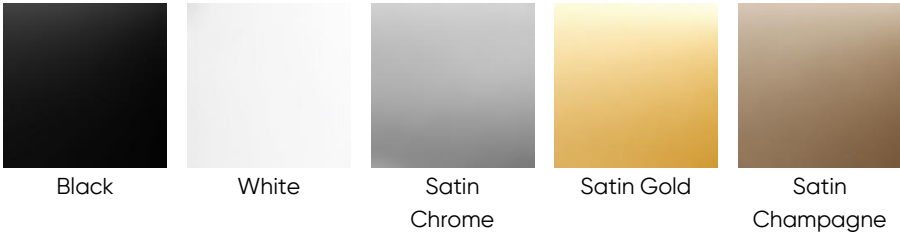


**FIXTURE FINISH**

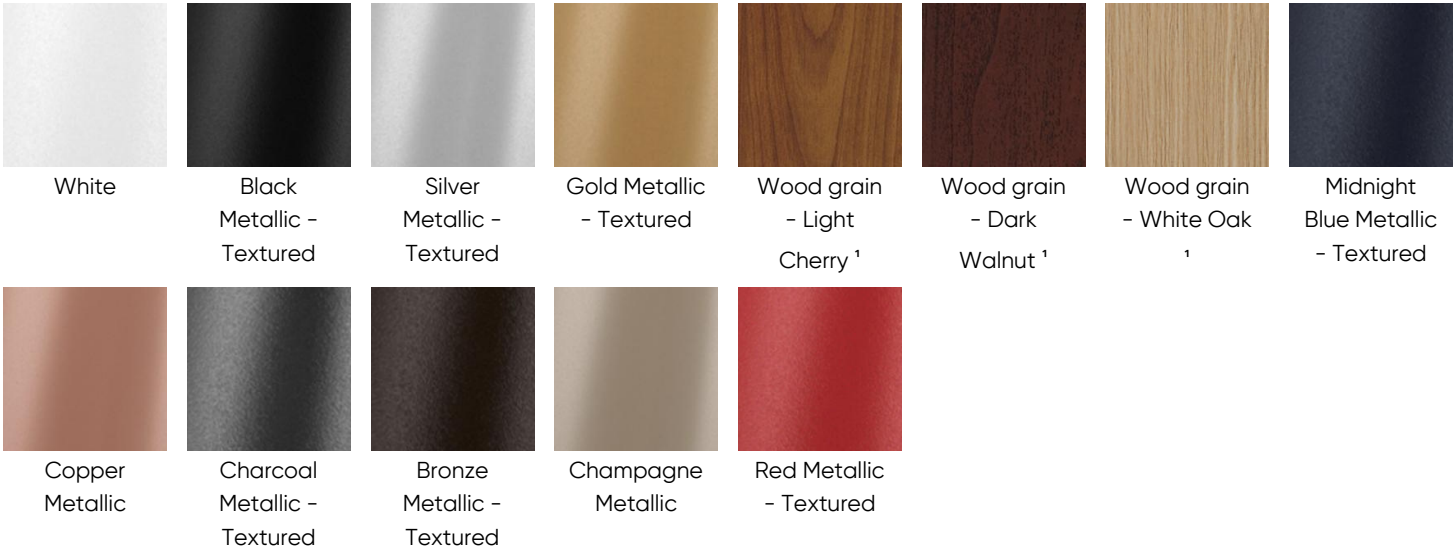

<sup>1</sup> Wood grain finishes may incur longer lead times and setup charges. Consult factory for details.

**CANOPY FINISH**

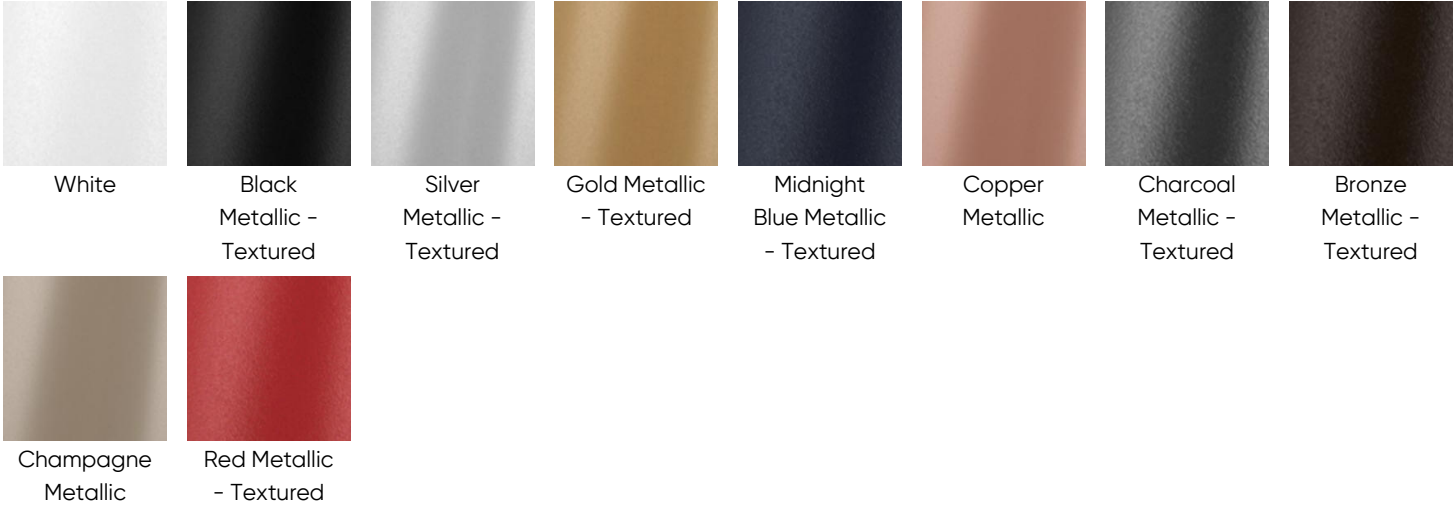

**6 HOW TO ORDER**

**1. LUMINAIRE**

<b>HLKP1P01</b> 18" Radius, 120° Arc Direct	<b>HLKP1P02</b> 30" Radius, 120° Arc Direct	<b>HLKP1P03</b> 42" Radius, 120° Arc Direct	<b>HLKP1P04</b> 18" Radius, 240° Arc Direct
<b>HLKP1P05</b> 30" Radius, 240° Arc Direct	<b>HLKP1P06</b> 42" Radius, 240° Arc Direct	<b>HLKP2P01</b> 18" Radius, 120° Arc Direct/Indirect	<b>HLKP2P02</b> 30" Radius, 120° Arc Direct/Indirect
<b>HLKP2P03</b> 42" Radius, 120° Arc Direct/Indirect	<b>HLKP2P04</b> 18" Radius, 240° Arc Direct/Indirect	<b>HLKP2P05</b> 30" Radius, 240° Arc Direct/Indirect	<b>HLKP2P06</b> 42" Radius, 240° Arc Direct/Indirect

All data shown based on max values and white body with white louver. Longer than normal lead-times may apply, consult factory.

**2. LOUVERS**

<b>LV2</b> Black	<b>LV3</b> White	<b>LV4</b> Satin Chrome	<b>LV6</b> Satin Gold
<b>LV9</b> Satin Champagne			

**3. LUMENS (DIRECT)**

<b>LPF020</b> 200 lm/ft	<b>LPF030</b> 300 lm/ft	<b>LPF040</b> 400 lm/ft	<b>LPF050</b> 500 lm/ft
<b>LPF070</b> 700 lm/ft	<b>LPF090</b> 900 lm/ft		

Lumens/ft are determined by the color of the Louver. Consult website for available lumens/ft based on selected louver.

**4. LUMENS (INDIRECT)**

<b>LPG000</b> Not required	<b>LPG030</b> 300 lm/ft	<b>LPG050</b> 500 lm/ft	<b>LPG070</b> 700 lm/ft
<b>LPG090</b> 900 lm/ft	<b>LPG110</b> 1100 lm/ft		

**5. CRI**

<b>CR80</b> CRI 80+	<b>CR90</b> CRI 90+
---------------------	---------------------

**6. CCT**

<b>CTA30</b> 3000K	<b>CTA35</b> 3500K	<b>CTA40</b> 4000K
--------------------	--------------------	--------------------

**7. INDIRECT LENS**

<b>UD0</b> Not required	<b>UD2</b> Opal
-------------------------	-----------------

**8. VOLTAGE**

<b>V1</b> 120/277V	<b>V2</b> 240V <sup>1</sup>	<b>V3</b> 347V <sup>2</sup>
--------------------	-----------------------------	-----------------------------

<sup>1</sup> Not available in North America. <sup>2</sup> Only available with DA01.

## 9. DIMMING (REMOTE ONLY)

**DA01** 0-10V Dimming 1.0%      **DA02** 0-10V Dimming 0.1% <sup>1</sup>      **DA20** DALI Dimming 0.1% <sup>1</sup>      **DA21** DALI Dimming 1.0% <sup>1</sup>  
**DA30** DSI/switchDim <sup>2</sup>

All drivers are remote only.

<sup>1</sup> Not available with V3. <sup>2</sup> Not available in North America.

## 10. SUSPENSION

**SS1** Vertical, Remote driver

<sup>1</sup> Not available with HPNP2P07.

## 11. FIXTURE FINISH

**FA01** White      **FA02** Black Metallic - Textured      **FA20** Silver Metallic - Textured      **FA25** Gold Metallic - Textured  
**FA27** Wood grain - Light Cherry <sup>1</sup>      **FA28** Wood grain - Dark Walnut <sup>1</sup>      **FA30** Wood grain - White Oak <sup>1</sup>      **FA44** Midnight Blue Metallic - Textured  
**FA45** Copper Metallic      **FA46** Charcoal Metallic - Textured      **FA47** Bronze Metallic - Textured      **FA52** Champagne Metallic  
**FA53** Red Metallic - Textured

<sup>1</sup> Wood grain finishes may incur longer lead times and setup charges. Consult factory for details.

## 12. CANOPY FINISH

**CF01** White      **CF02** Black Metallic - Textured      **CF20** Silver Metallic - Textured      **CF25** Gold Metallic - Textured  
**CF44** Midnight Blue Metallic - Textured      **CF45** Copper Metallic      **CF46** Charcoal Metallic - Textured      **CF47** Bronze Metallic - Textured  
**CF52** Champagne Metallic      **CF53** Red Metallic - Textured

## 13. EMERGENCY

**E0** Not required      **E2** Emergency system - Remote

## 14. CIRCUIT

**CS1** Single circuit      **CS2** Dual circuit

## 15. CONTROLS

**C0** Not required      **C1** Encelium/Zigbee

**7** TECHNICAL DATA


**LUMINAIRE**

All data shown based on max values and white body with white louver. Longer than normal lead-times may apply, consult factory.


<b>Code</b>	<b>HLKP1P01</b>	<b>HLKP1P02</b>	<b>HLKP1P03</b>	<b>HLKP1P04</b>	<b>HLKP1P05</b>	<b>HLKP1P06</b>
<b>Radius/Arc</b>	18" Radius/120° Arc	30" Radius/120° Arc	42" Radius/120° Arc	18" Radius/240° Arc	30" Radius/240° Arc	42" Radius/240° Arc
<b>Light Direction</b>	Direct	Direct	Direct	Direct	Direct	Direct
<b>Wattage</b>	27	45	60	54	91	121
<b>Direct lms</b>	2700	4300	5900	5400	8700	12000
<b>Indirect lms</b>						
<b>LPW</b>	99	96	99	99	96	99
<b>Code</b>	<b>HLKP2P01</b>	<b>HLKP2P02</b>	<b>HLKP2P03</b>	<b>HLKP2P04</b>	<b>HLKP2P05</b>	<b>HLKP2P06</b>
<b>Radius/Arc</b>	18" Radius/120° Arc	30" Radius/120° Arc	42" Radius/120° Arc	18" Radius/240° Arc	30" Radius/240° Arc	42" Radius/240° Arc
<b>Light Direction</b>	Direct/Indirect	Direct/Indirect	Direct/Indirect	Direct/Indirect	Direct/Indirect	Direct/Indirect
<b>Wattage</b>	52	87	115	103	175	229
<b>Direct lms</b>	2700	4300	5900	5400	8700	12000
<b>Indirect lms</b>	3700	6200	8000	7500	12500	16100
<b>LPW</b>	125	121	123	125	121	123

**8** PERFORMANCE DATA


**DIRECT COMFORT (DD4) – WHITE LOUVER**

	LUMEN/FT	WATT/FT	LPW
	900	9	98
	700	7	101
	500	5	105
	400	4	107
	300	3	110
	200	2	113


**DIRECT COMFORT (DD4) – BLACK LOUVER**

	LUMEN/FT	WATT/FT	LPW
	500	9	58
	400	7	60
	300	5	62
	200	4	63


**DIRECT COMFORT (DD4) – SATIN CHROME LOUVER**

	LUMEN/FT	WATT/FT	LPW
	700	9	78
	500	7	80
	400	5	83
	300	4	84
	200	3	87


**DIRECT COMFORT (DD4) – SATIN GOLD LOUVER**

	LUMEN/FT	WATT/FT	LPW
	700	9	76
	500	7	78
	400	5	81
	300	4	83
	200	3	85

**DIRECT COMFORT (DD4) – SATIN CHAMPAGNE LOUVER**

	LUMEN/FT	WATT/FT	LPW
	700	9	78
	500	7	80
	400	5	83
	300	4	84
	200	3	87


**INDIRECT OPAL (UD2)**

	LUMEN/FT	WATT/FT	LPW
	1100	9	151
	900	7	153
	700	5	158
	500	4	161
	300	3	171


**9 DIMENSIONAL DIAGRAMS**

**OOOOH Kurl**


**18" Radius**

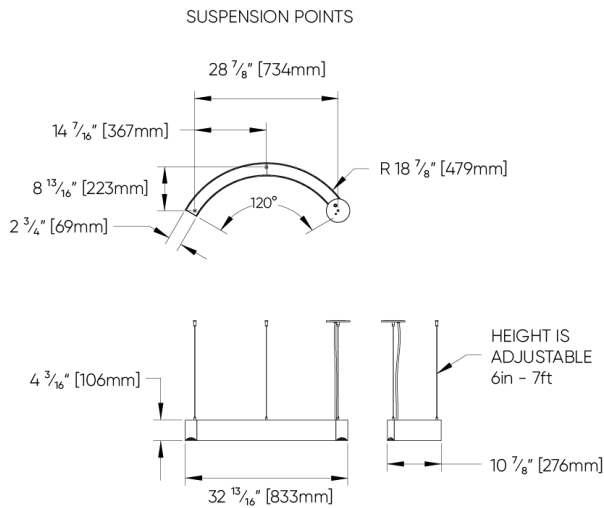

**30" Radius**

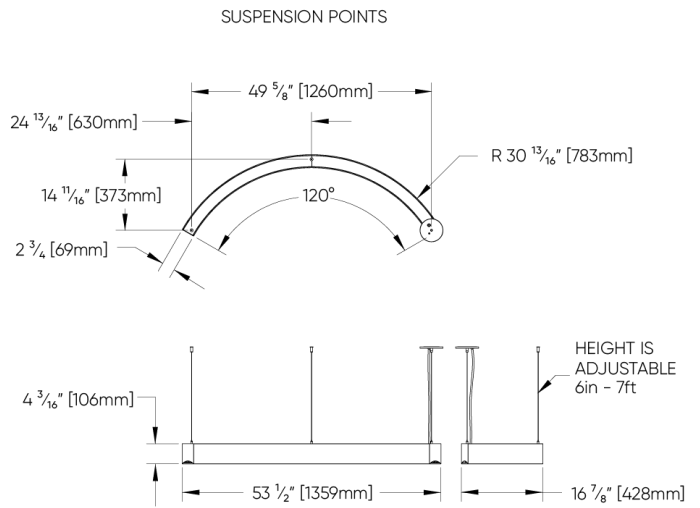


**42" Radius**

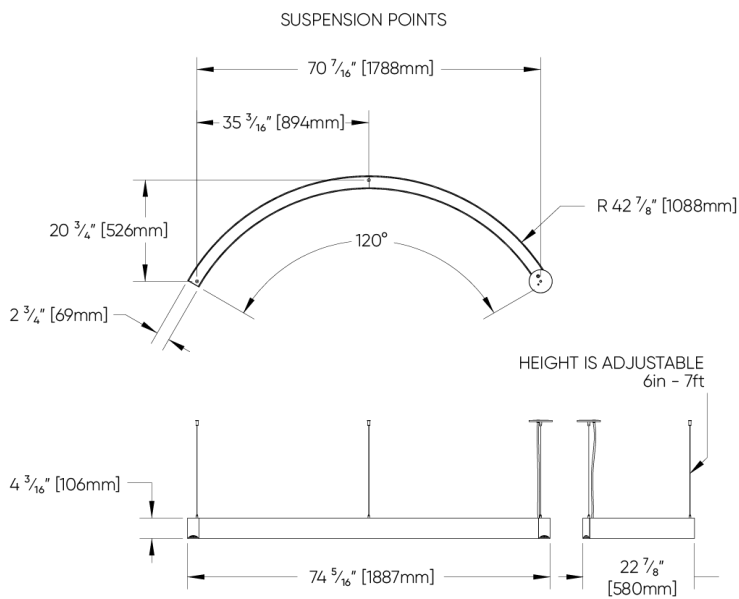


## OOOOH Kurl

### 18" Radius

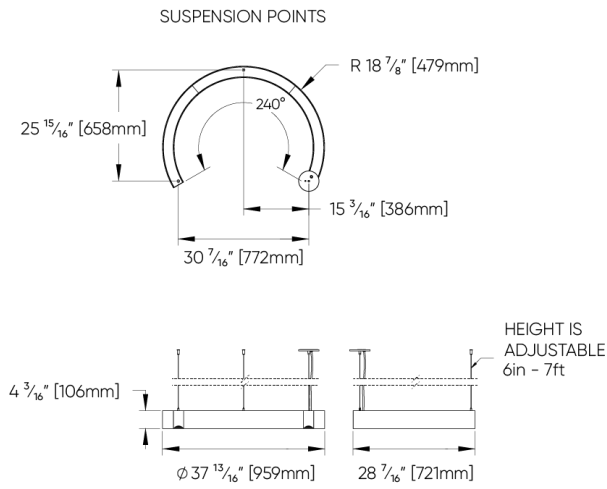

### 30" Radius

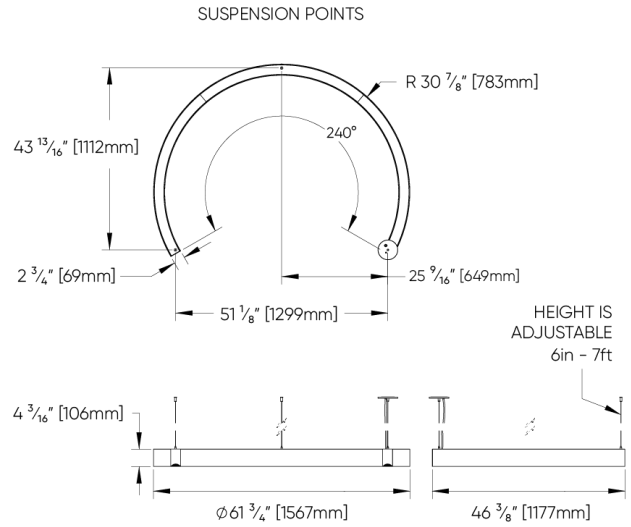

### 42" Radius

