

0000H QUAD™ - SUSPENDED

Project Name:


Fixture Type:

Fixture Code:

Quantities:



0000H QUAD™ - SUSPENDED

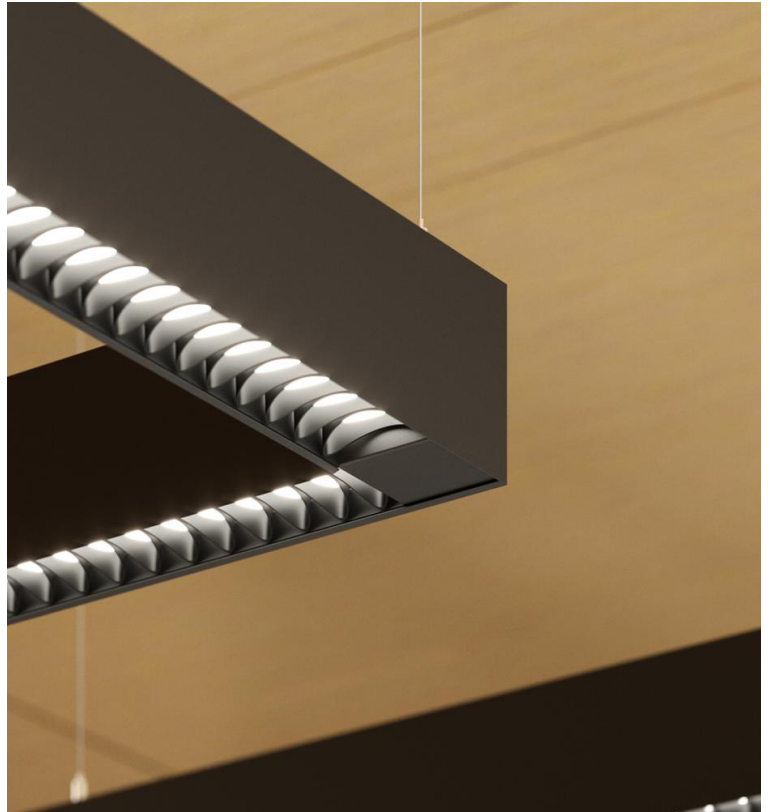

0000H QUAD™ - SUSPENDED

0000H dazzles up traditional linear lighting concepts with an innovative louver system. An array of ellipses is incurved to conform to a tunnel-shaped profile creating a subtle aesthetic and sublime lighting effect. The louver system not only tempers the starkness of the commonly exposed diffuser and adds an enchanting decorative feature, but also offers visual comfort by minimizing glare. The injection-molded louvers come in 5 finishes: Black for the highest glare control, White for higher reflectance and performance, and for an interior design enhancement, satinized finishes Satin Chrome, Satin Gold, and Satin Champagne. Build a continuous lighting plan with the new Systems option.

GENERAL SPECIFICATION

Body

Aluminum.

Suspension

Steel cables.

Integral Emergency system

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The self contained system includes the inverter module, NiCad batteries, LED charge indicator and test switch (NA only). Not available with a 347V supply.

PoE

Can integrate into your data network via Power over Ethernet (PoE) connectivity.

Sensors

Compatible with Avi-On, Casambi, Enlighted, Lutron Vive, nLight, NX Lighting Controls, Osram, Philips, and others. Consult factory.

Reported L70 @25°C (77°F)

> 60,000 hrs @ 2000 lumens/ft (6000 lumens/m)

Delivered Lumens

Delivered lumens & LPW based on 4000K, CRI 80+.

Designed by

Serge Cornelissen.

Finish

Powder coated.

Power cable

Silver braided.

Drivers

HPF electronic drivers for 120-277V, 347V (EU-240V). The driver is integral to the fixture housing.

Diffusers

Opal acrylic.

Mechanical

Luminaires mount directly over J box (by others - North America only).

Tunable White

Tunable white available, consult factory.

Estimated L70 @25°C (77°F)

>165,000 hrs @ 2000 lumens/ft (6000 lumens/m)


Approvals

Damp Rated.


Design

US Pat. No. D969,395.


MOUNTING & OPTICS



Suspended Direct




Suspended Direct/Indirect



Direct DD4



Indirect UD1



Declare



PoE



0000H QUAD™ - SUSPENDED

HOW TO ORDER

A. LUMINAIRE

HLNQ1P01 29" Sq, Direct	HLNQ1P02 53" Sq, Direct	HLNQ1P05 29" x 53", Direct	HLNQ2P01 29" Sq, Direct/Indirect
HLNQ2P02 53" Sq, Direct/Indirect	HLNQ2P05 29" x 53", Direct/Indirect		

For larger sizes, refer to Oooh Systems.
One power cord for every 50 linear ft.

B. LOUVER

LV2 Black	LV3 White	LV4 Satin Chrome	LV6 Satin Gold
LV9 Satin Champagne			

C. LUMENS/FT (DIRECT)

LPF010 100 lm/ft	LPF020 200 lm/ft ¹	LPF030 300 lm/ft ²	LPF040 400 lm/ft ³
LPF050 500 lm/ft	LPF060 600 lm/ft	LPF070 700 lm/ft	LPF080 800 lm/ft
LPF100 1000 lm/ft	LPF120 1200 lm/ft		

Lumens/ft are determined by the color of the Louver. Consult website for available lumens/ft based on selected louver.

D. LUMENS/FT (INDIRECT)

LPG000 Not required	LPG025 250 lm/ft	LPG050 500 lm/ft	LPG075 750 lm/ft
LPG100 1000 lm/ft	LPG120 1200 lm/ft	LPG160 1600 lm/ft	

E. CRI

CR80 CRI 80+	CR90 CRI 90+
---------------------	---------------------

F. CCT (DIRECT)

CTA30 3000K	CTA35 3500K	CTA40 4000K
--------------------	--------------------	--------------------

CCT (INDIRECT)

CTB00 Not required	CTB30 3000K	CTB35 3500K	CTB40 4000K
---------------------------	--------------------	--------------------	--------------------

G. DIRECT DIFFUSER

DD4 Comfort diffuser

¹ High output diffuser, all data shown based on this diffuser.

² 5% reduction from DD3. The Comfort lens provides better control and softer distribution.

H. INDIRECT DIFFUSER

UDO Not required	UD1 Clear diffuser (Batwing)
-------------------------	-------------------------------------

I. BLACKOUT PLATE

UB00 Not required	UB_ _ Blackout plate ¹
--------------------------	--

¹ Available on a per foot basis. May be required to prevent lighting up duct work in a loft type application.



0000H QUAD™ - SUSPENDED

J. VOLTAGE

V1 120/277V

V2 240V¹

V3 347V²

V4 Low Voltage³

¹ Not available in North America.

² Available with DA01 dimming only.

³ Available with DA45 dimming only.

K. DIMMING (REMOTE)

DA01 0-10V Dimming 1.0%¹

DA02 0-10V Dimming 0.1%¹

DA20 DALI Dimming 0.1%^{1 2}

DA21 DALI Dimming 1.0%^{1 2}

DA30 DSL/switchDim

DA45 PoE³

¹ Not available with V3.

² Available with V4 only.

L. CEILING TYPE

G1 Grid ceiling¹

H1 Hard ceiling²

The cost of canopies, power cables, connection mechanisms and endcaps for the fixture has been added to these items.

¹ Combo kit provided includes installation to T-bar and through tile mount.

² Designed for drywall ceilings.

M. SUSPENSION

HLA03 3ft cable suspension

HLA06 6ft cable suspension

HLA09 9ft cable suspension

N. FIXTURE FINISH

FA01 White

FA02 Black Metallic - Textured

FA20 Silver Metallic - Textured

FA25 Gold Metallic - Textured

FA27 Wood grain - Light Cherry¹

FA28 Wood grain - Dark Walnut¹

FA44 Midnight Blue Metallic - Textured

FA45 Copper Metallic

FA46 Charcoal Metallic - Textured

FA47 Bronze Metallic - Textured

FA52 Champagne Metallic

FA53 Red Metallic - Textured

¹ Longer than normal lead times may apply, consult factory.

O. CANOPY FINISH

CF01 White

CF02 Black Metallic - Textured

CF20 Silver Metallic - Textured

CF25 Gold Metallic - Textured

CF44 Midnight Blue Metallic - Textured

CF45 Copper Metallic

CF46 Charcoal Metallic - Textured

CF47 Bronze Metallic - Textured

CF52 Champagne Metallic

CF53 Red Metallic - Textured

P. EMERGENCY

E0 Not required

E1 Emergency system - Integral¹

E3 Emergency generator circuit¹

¹ Available upon request, consult factory for details. Not available in 347V.

Q. CIRCUITS

CS1 Single circuit


CS2 Dual circuit

R. SENSORS




0000H QUAD™ - SUSPENDED

LOUVER

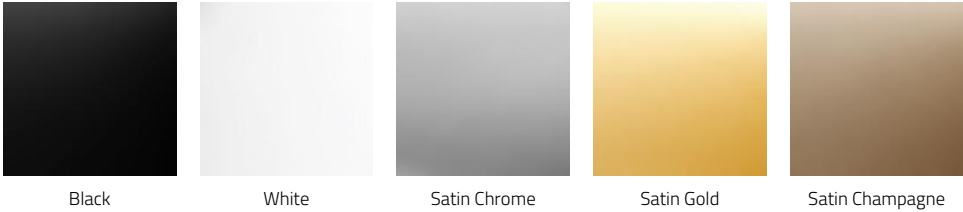

Black White Satin Chrome Satin Gold Satin Champagne

FIXTURE FINISH

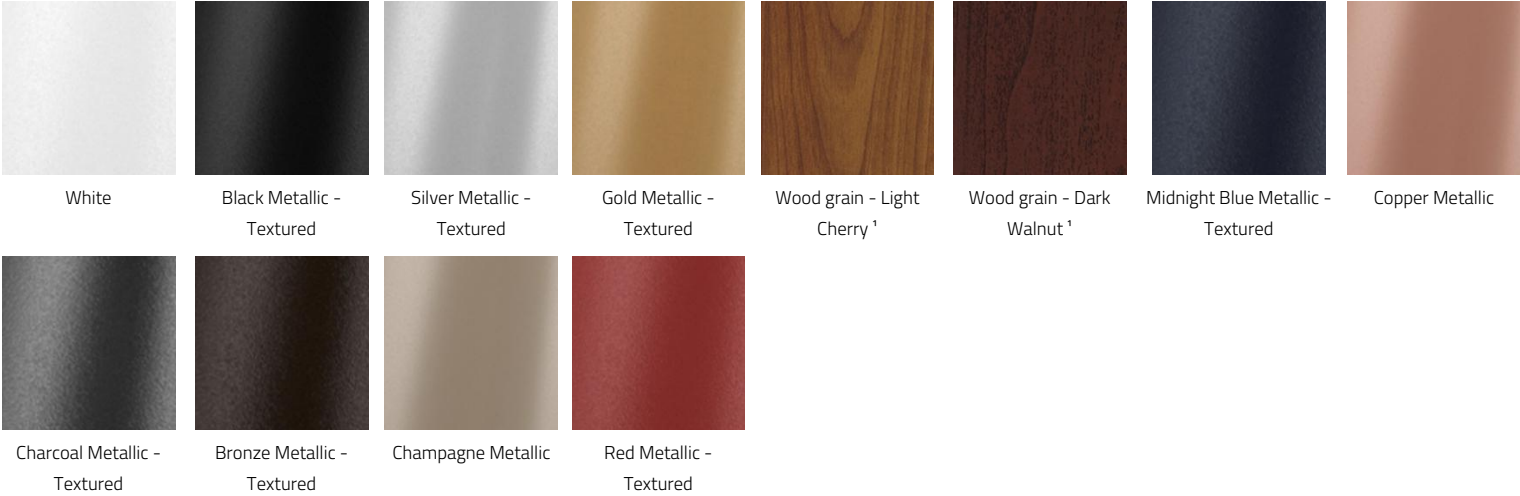


White Black Metallic - Textured Silver Metallic - Textured Gold Metallic - Textured Wood grain - Light Cherry¹ Wood grain - Dark Walnut¹ Midnight Blue Metallic - Textured Copper Metallic

Charcoal Metallic - Textured Bronze Metallic - Textured Champagne Metallic Red Metallic - Textured

¹ Longer than normal lead times may apply, consult factory.

CANOPY FINISH

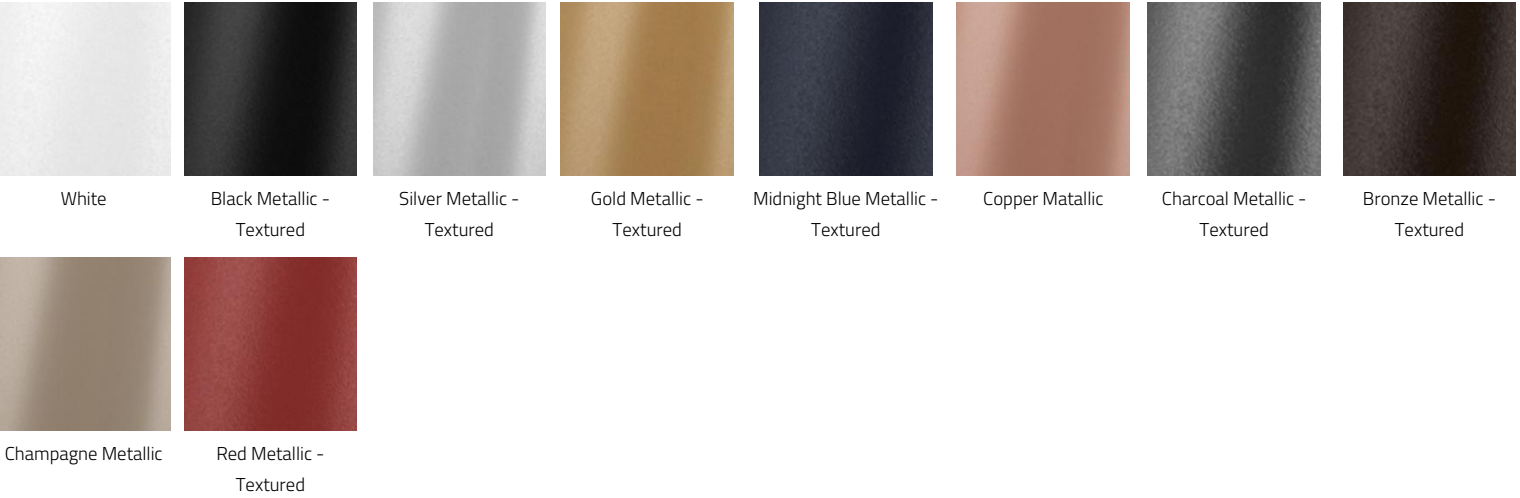

White Black Metallic - Textured Silver Metallic - Textured Gold Metallic - Textured Midnight Blue Metallic - Textured Copper Metallic Charcoal Metallic - Textured Bronze Metallic - Textured

Champagne Metallic Red Metallic - Textured


APPROVALS



0000H QUAD™ - SUSPENDED

PERFORMANCE DATA

DIRECT COMFORT (DD4) - WHITE LOUVER

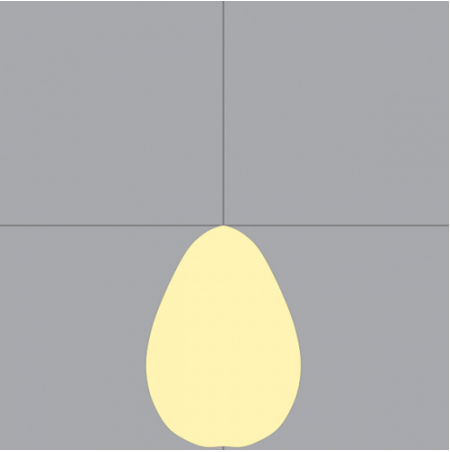


LUMEN/FT
1300
1200
1000
800
700
600
500
400
300
200

WATT/FT
13
11
9
7
6
5
4
3
3
2

LPW
106
108
110
114
115
117
119
121
126
128

DIRECT COMFORT (DD4) - BLACK LOUVER

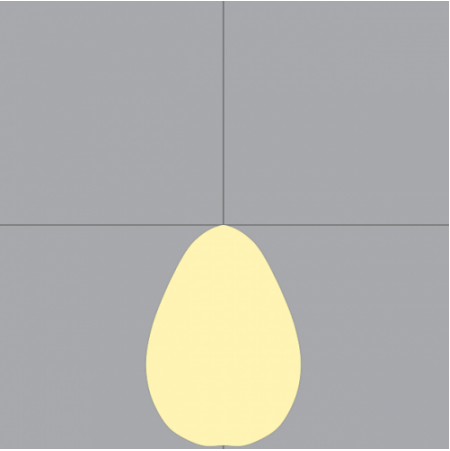


LUMEN/FT
700
600
500
400
300
200

WATT/FT
13
11
9
7
5
3

LPW
57
58
59
61
63
65

DIRECT COMFORT (DD4) - SATIN CHROME LOUVER

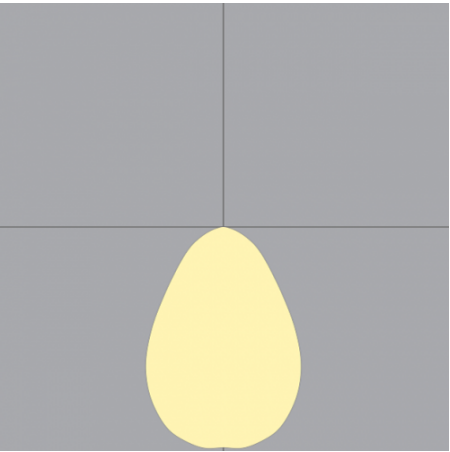

LUMEN/FT
1000
800
700
600
500
400
300
200

WATT/FT
13
9
9
7
5
4
3
2

LPW
84
87
89
90
93
95
95
98


0000H QUAD™ - SUSPENDED

DIRECT COMFORT (DD4) - SATIN GOLD LOUVER

LUMEN/FT

WATT/FT

LPW

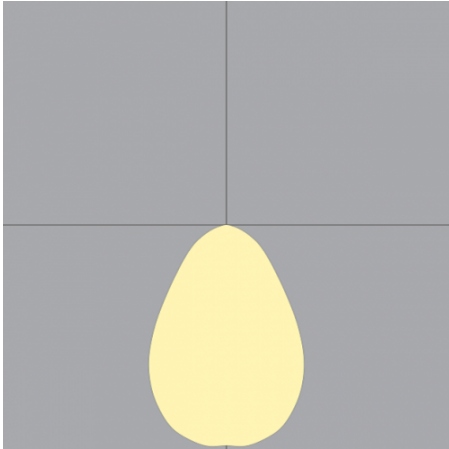

1000
800
700
600
500
400
300
200

13
9
9
7
5
4
3
2


82
85
87
88
91
93
93
96

DIRECT COMFORT (DD4) - SATIN CHAMPAGNE LOUVER

LUMEN/FT

WATT/FT

LPW

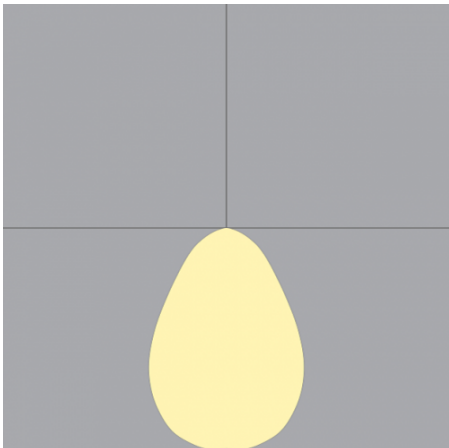

1000
800
700
600
500
400
300
200

13
9
9
7
5
4
3
2


84
87
89
90
93
95
95
98

INDIRECT BATWING (UD1)

LUMEN/FT

WATT/FT

LPW

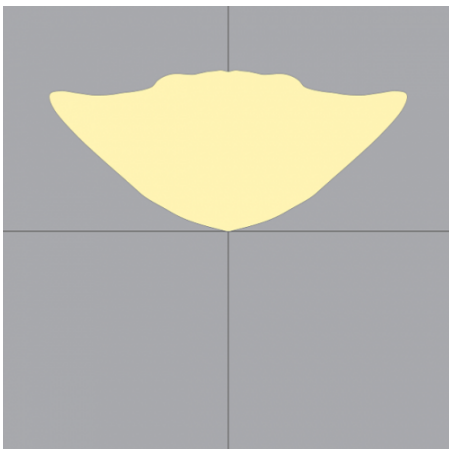



1650
1400
1200
1000
800
600
400
200

13
10
9
7
6
4
3
1


133
138
141
145
147
151
154
154

0000H QUAD™ - SUSPENDED

DIMENSIONAL DIAGRAMS

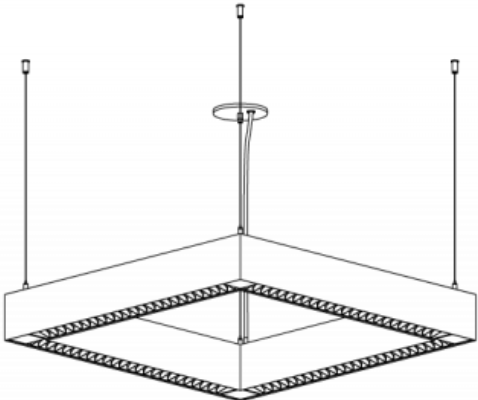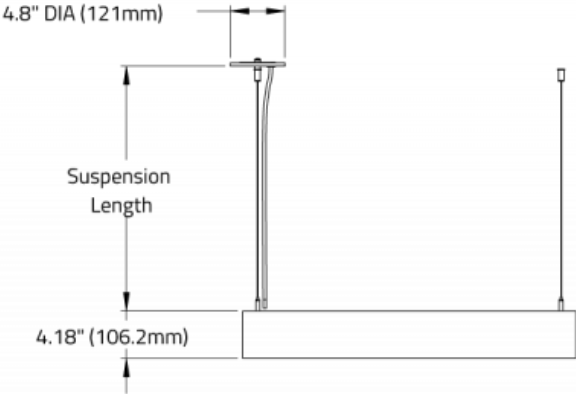

ISOMETRIC BOTTOM VIEW

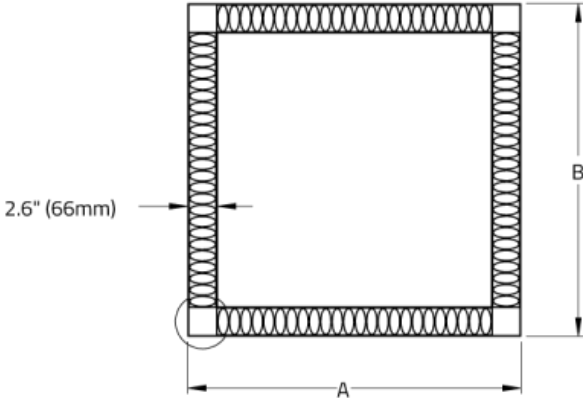

Luminaire	A	B
HLNQ1P01/HLNQ2P01	29.19" (741.4mm)	29.19" (741.4mm)
HLNQ1P02/HLNQ2P02	53.19" (1351.0mm)	53.19" (1351.0mm)
HLNQ1P05/HLNQ2P05	29.19" (741.4mm)	53.19" (1351.0mm)