




OOOOH™

SHORT SPECIFICATION SHEET

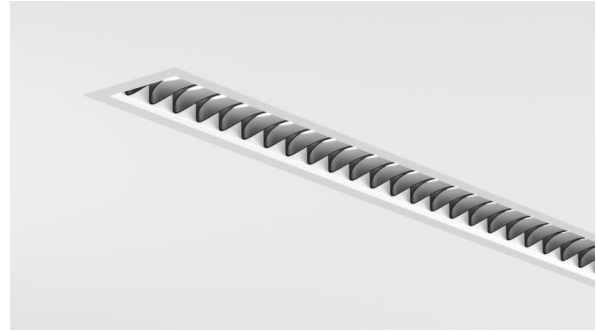

Fixture Type

Fixture Code

Quantities

1 HOW TO ORDER

1. LUMINAIRE

HLNR1R Direct

.One power cord for every 50 linear feet.

2. LENGTH OF RUN

Minimum length to order is 4ft and orders to be in 2ft increments.

Example: 4ft = SFG0400

Example: 10ft = SFG1000

Example: 50ft = SFG5000

For runs over 50ft in length, consult factory.

SFG_ _ _ _

Minimum length to order is 4ft and orders to be in 2ft increments.

Example: 4ft = SFG0400

Example: 10ft = SFG1000

Example: 50ft = SFG5000

For runs over 50ft in length, consult factory.

3. MAX LENGTH PER SECTION

SL04 4ft	SL06 6ft	SL08 8ft	SL10 10ft
SL12 12ft			

You can select the preferred maximum length per segment, to account for transportation and building constraints. Example: If a 40ft run is required and SL12 (12ft) is selected, we would provide 4 10ft segments. For special requirements, please contact sales@betacalco.com.

4. LOUVER

LV2 Black	LV3 White	LV4 Satin Chrome	LV6 Satin Gold
LV9 Satin Champagne			

5. LM/FT

LPF020 200 lm/ft	LPF030 300 lm/ft	LPF040 400 lm/ft	LPF050 500 lm/ft
LPF060 600 lm/ft	LPF070 700 lm/ft	LPF080 800 lm/ft	LPF100 1000 lm/ft
LPF120 1200 lm/ft	LPF130 1300 lm/ft		

Lumens/ft are determined by the color of the Louver. Consult website for available lumens/ft based on selected louver.

6. CRI

CR80 CRI 80+	CR90 CRI 90+
---------------------	---------------------

7. CCT

CTA27 2700K	CTA30 3000K	CTA35 3500K	CTA40 4000K
--------------------	--------------------	--------------------	--------------------

8. DIFFUSER

DD1 Asymmetric diffuser ¹	DD4 Comfort diffuser
---	-----------------------------

¹ When standing at the end view of the profile on the side where the power cord is installed, the asymmetric beam will aim to the right.

9. VOLTAGE

V1 120/277V	V2 240V ¹	V3 347V ²	V4 Low Voltage ³
--------------------	-----------------------------	-----------------------------	------------------------------------

¹ V2 not available in North America.

² V3 available with DA01 dimming only.

³ V4 available with DA45 dimming only.

10. DIMMING

DA01 0–10V Dimming 1.0%	DA02 0–10V Dimming 0.1% ¹	DA20 DALI Dimming 0.1% ¹	DA21 DALI Dimming 1.0% ¹
DA30 DSI/switchDim ²	DA45 PoE ³		

¹ Not available with V3.

² Not available in North America.

³ Only available with V4.

11. CEILING TYPE & TRIM

RT1 Tegular ceiling ¹	RT2 T-Bar ceiling ²	RT3 Trimless ³	RT4 Trim ³
---	---------------------------------------	----------------------------------	------------------------------

¹ Fixture designed to fit into a 9/16" or 15/16" standard tegular grid T-bar and through tile mount. Dimensions are nominal for grid ceiling fixtures. All fixture metalwork is white.

² Fixture designed to fit into a 9/16" or 15/16" standard grid T-bar and through tile mount. Dimensions are nominal for grid ceiling fixtures. All fixture metalwork is white.

³ Fixture designed for drywall ceilings. All fixture metalwork is white.

12. EMERGENCY

EO Not required	E1 Emergency system – Integral ¹	E3 Emergency generated circuit ¹
------------------------	--	--

¹ A drawing will be required at time of ordering to determine the required number and location of the emergency sections or generator circuits. Not available in 347V.

13. CHICAGO PLENUM

CP0 Not required	CP1 Chicago Plenum
-------------------------	---------------------------