




OOOOH™

SHORT SPECIFICATION SHEET

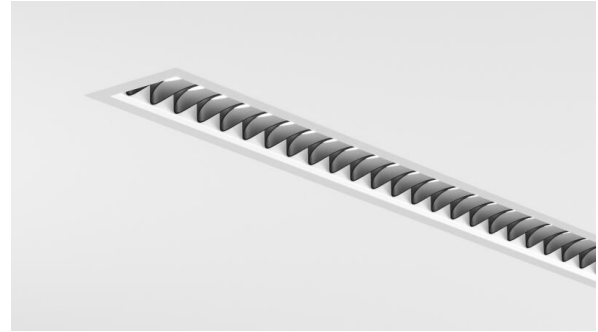

Fixture Type

Fixture Code

Quantities


1 DESCRIPTION

OOOOH dazzles up traditional linear lighting concepts with an innovative louver system. An array of ellipses is incurved to conform to a tunnel-shaped profile creating a subtle aesthetic and sublime lighting effect. The louver system not only tempers the starkness of the commonly exposed diffuser and adds an enchanting decorative feature, but also offers visual comfort by minimizing glare. Behind the louver system is either the Comfort diffuser which provides a softer and even distribution of light, or an asymmetric which skews the light for brightening up walls or adding to the ambient light. Ooooh presents a simple way to transform a functional light into a luxurious design feature.


2 MOUNTING & OPTICS



Recessed




Direct DD1



Direct DD4



Bios



Declare



PoE

3 APPROVALS



4 GENERAL SPECIFICATION

BODY

Aluminum.

FINISH

Powder coated.

DRIVERS

HPF electronic drivers for 120–277V, 347V (EU–240V). The driver is integral to the fixture housing.

INTEGRAL EMERGENCY SYSTEM

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The self contained system includes the inverter module, NiCad batteries, LED charge indicator and test switch (NA only). Not available with a 347V supply.

POE

Can be integrated into your data network via Power over Ethernet (PoE) connectivity.

REPORTED L70 @25°C (77°F)

> 60,000 hrs @ 1300 lumens/ft (4300 lumens/m).

DELIVERED LUMENS

Delivered lumens & LPW based on 4000K CRI 80+

RGBW

RGBW available, consult factory.

DESIGN

US Pat. No. D969,395.

DIFFUSER

Opal acrylic. 2.4" width.

GRID CEILINGS

Dimensions are nominal for grid ceiling fixtures. Fixtures are designed to fit within standard grid ceiling systems.

BIOS

For circadian lighting, consult factory.

ESTIMATED L70 @25°C (77°F)

> 149,000 hrs @ 1300 lumens/ft (4300 lumens/m).

TUNABLE WHITE

Tunable White range from 2700K to 6500K is available; contact the factory for details.

APPROVALS

Damp Rated.

5 DESIGN OPTIONS

LOUVER



6 HOW TO ORDER

A. LUMINAIRE

HLNR1R Direct

.One power cord for every 50 linear feet.

B. LENGTH OF RUN

SFG_ _ _ _

Minimum length to order is 4ft and orders to be in 2ft increments.

Example: 4ft = SFG0400

Example: 10ft = SFG1000

Example: 50ft = SFG5000

For runs over 50ft in length, consult factory.

C. MAX LENGTH PER SECTION

SL04 4ft **SL06** 6ft **SL08** 8ft **SL10** 10ft
SL12 12ft

You can select the preferred maximum length per segment, to account for transportation and building constraints. Example: If a 40ft run is required and SL12 (12ft) is selected, we would provide 4 10ft segments. For special requirements, please contact sales@betacalco.com.

D. LOUVER

LV2 Black **LV3** White **LV4** Satin Chrome **LV6** Satin Gold
LV9 Satin Champagne

E. LM/FT

LPF020 200 lm/ft	LPF030 300 lm/ft	LPF040 400 lm/ft	LPF050 500 lm/ft
LPF060 600 lm/ft	LPF070 700 lm/ft	LPF080 800 lm/ft	LPF100 1000 lm/ft
LPF120 1200 lm/ft	LPF130 1300 lm/ft		

Lumens/ft are determined by the color of the Louver. Consult website for available lumens/ft based on selected louver.

F. CRI

CR80 CRI 80+	CR90 CRI 90+
---------------------	---------------------

G. CCT

CTA27 2700K	CTA30 3000K	CTA35 3500K	CTA40 4000K
--------------------	--------------------	--------------------	--------------------

H. DIFFUSER

DD1 Asymmetric diffuser ¹	DD4 Comfort diffuser
---	-----------------------------

¹ When standing at the end view of the profile on the side where the power cord is installed, the asymmetric beam will aim to the right.

I. VOLTAGE

V1 120/277V	V2 240V ¹	V3 347V ²	V4 Low Voltage ³
--------------------	-----------------------------	-----------------------------	------------------------------------

¹ V2 not available in North America.

² V3 available with DA01 dimming only.

³ V4 available with DA45 dimming only.

J. DIMMING

DA01 0–10V Dimming 1.0%	DA02 0–10V Dimming 0.1% ¹	DA20 DALI Dimming 0.1% ¹	DA21 DALI Dimming 1.0% ¹
DA30 DSI/switchDim ²	DA45 PoE ³		

¹ Not available with V3.

² Not available in North America.

³ Only available with V4.

K. CEILING TYPE & TRIM

RT1 Tegular ceiling ¹

RT2 T-Bar ceiling ²

RT3 Trimless ³

RT4 Trim ³

¹ Fixture designed to fit into a 9/16" or 15/16" standard tegular grid T-bar and through tile mount. Dimensions are nominal for grid ceiling fixtures. All fixture metalwork is white.

² Fixture designed to fit into a 9/16" or 15/16" standard grid T-bar and through tile mount. Dimensions are nominal for grid ceiling fixtures. All fixture metalwork is white.

³ Fixture designed for drywall ceilings. All fixture metalwork is white.

L. EMERGENCY

EO Not required

E1 Emergency system – Integral ¹ **E3** Emergency generated circuit ¹

¹ A drawing will be required at time of ordering to determine the required number and location of the emergency sections or generator circuits. Not available in 347V.

M. CHICAGO PLENUM

CP0 Not required

CP1 Chicago Plenum

7 TECHNICAL DATA

LUMINAIRE











.One power cord for every 50 linear feet.

Code HLNRI1R



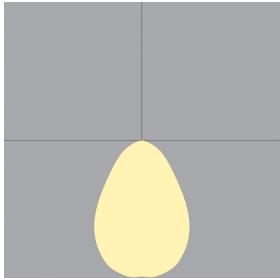


Light Direction Direct

8 PERFORMANCE DATA


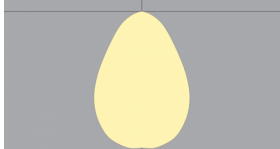
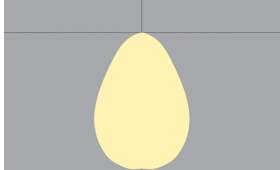
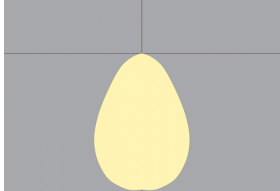



DIRECT COMFORT (DD4) - WHITE LOUVER

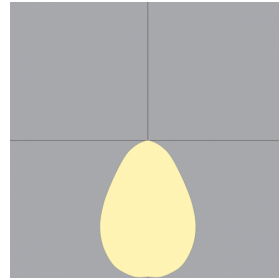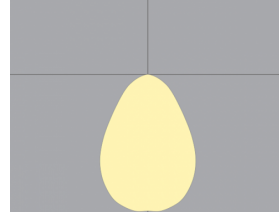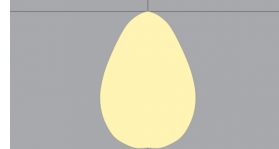	LUMEN/FT	WATT/FT	LPW
	1300	13	106
	1200	11	108
	1000	9	110
	800	7	114
	700	6	115
	600	5	117
	500	4	119
	400	3	121
	300	3	126
	200	2	128








DIRECT COMFORT (DD4) - BLACK LOUVER

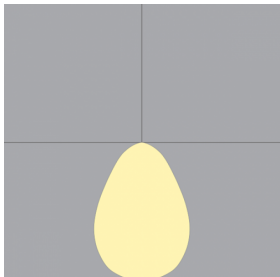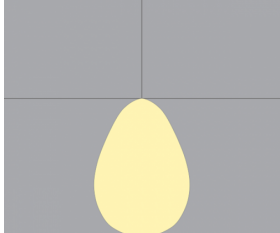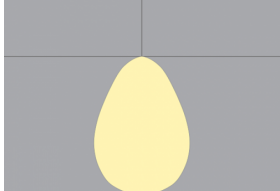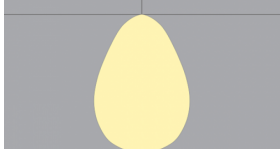	LUMEN/FT	WATT/FT	LPW
	700	13	57
	600	11	58
	500	9	59
	400	7	61
	300	5	63
	200	3	65








DIRECT COMFORT (DD4) - SATIN CHROME LOUVER

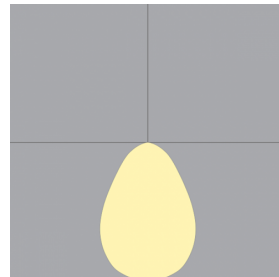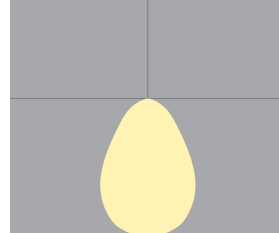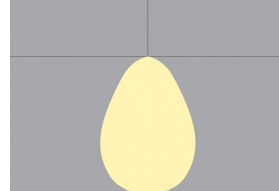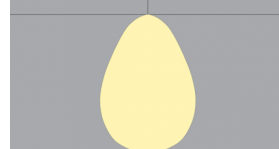	LUMEN/FT	WATT/FT	LPW
	1000	13	84
	800	9	87
	700	9	89
	600	7	90
	500	5	93
	400	4	95
	300	3	95
	200	2	98








DIRECT COMFORT (DD4) - SATIN GOLD LOUVER

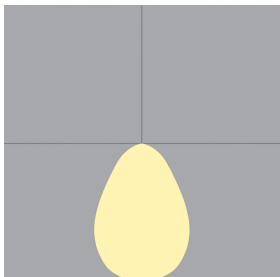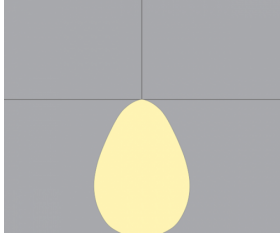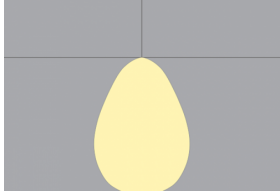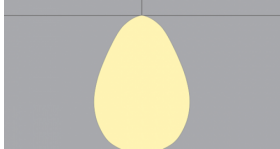	LUMEN/FT	WATT/FT	LPW
	1000	13	82
	800	9	85
	700	9	87
	600	7	88
	500	5	91
	400	4	93
	300	3	93
	200	2	96

DIRECT COMFORT (DD4) - SATIN CHAMPAGNE LOUVER


	LUMEN/FT	WATT/FT	LPW
	1000	13	84
	800	9	87
	700	9	89
	600	7	90
	500	5	93
	400	4	95
	300	3	95
	200	2	98

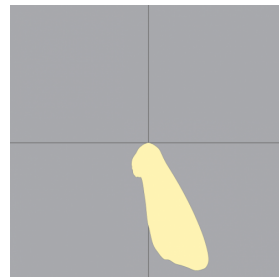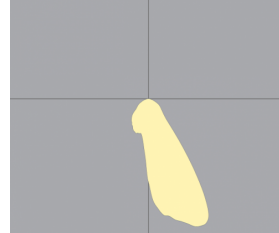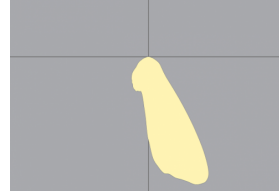DIRECT ASYMMETRIC (DD1) - WHITE LOUVER

	LUMEN/FT	WATT/FT	LPW
	1200	13	100
	1000	11	101
	800	9	105
	700	7	107
	600	6	108
	500	5	110
	400	4	112
	300	3	113
	200	2	116


9 TM-30 DATA

CCT 2700K

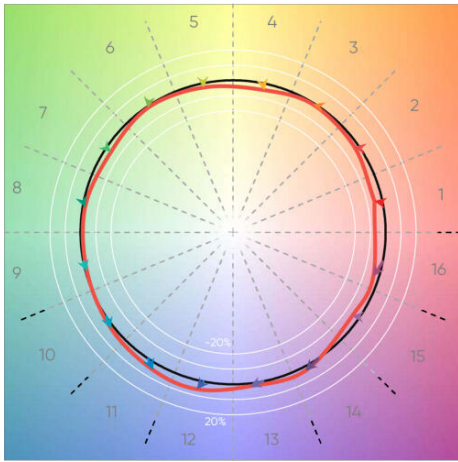


CRI(Ra)	93
CRI(R9)	61
TM30(Rf)	91
TM30(Rg)	98
Duv	-0.0022

CCT 3000K

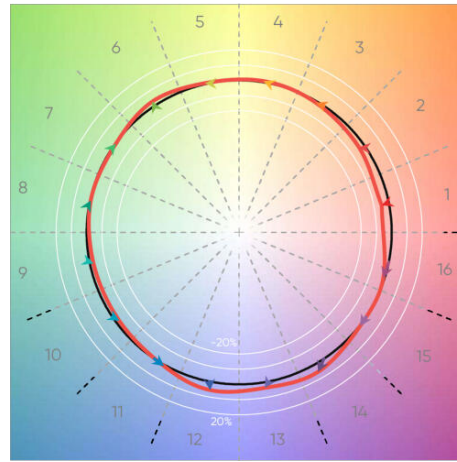


CRI(Ra)	92
CRI(R9)	58
TM30(Rf)	92
TM30(Rg)	100
Duv	-0.0003

CCT 3500K

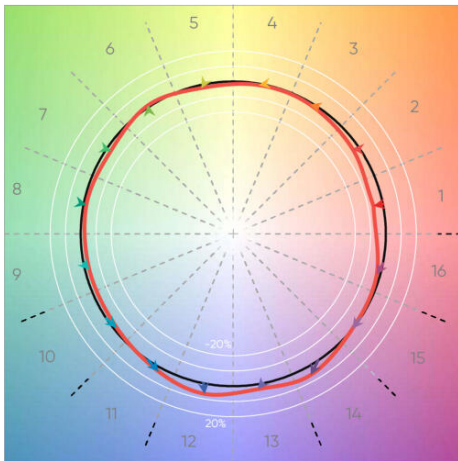


CRI(Ra)	91
CRI(R9)	53
TM30(Rf)	90
TM30(Rg)	99
Duv	-0.0007

CCT 4000K

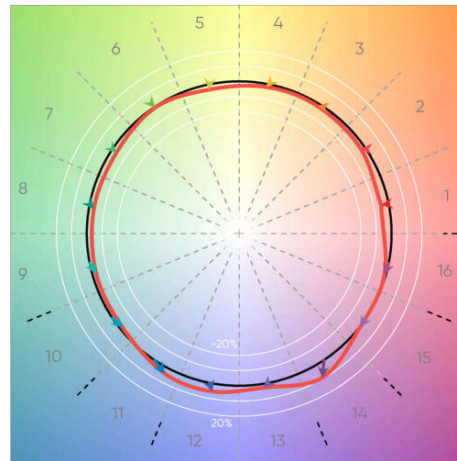


CRI(Ra)	93
CRI(R9)	64
TM30(Rf)	90
TM30(Rg)	98
Duv	0.0000

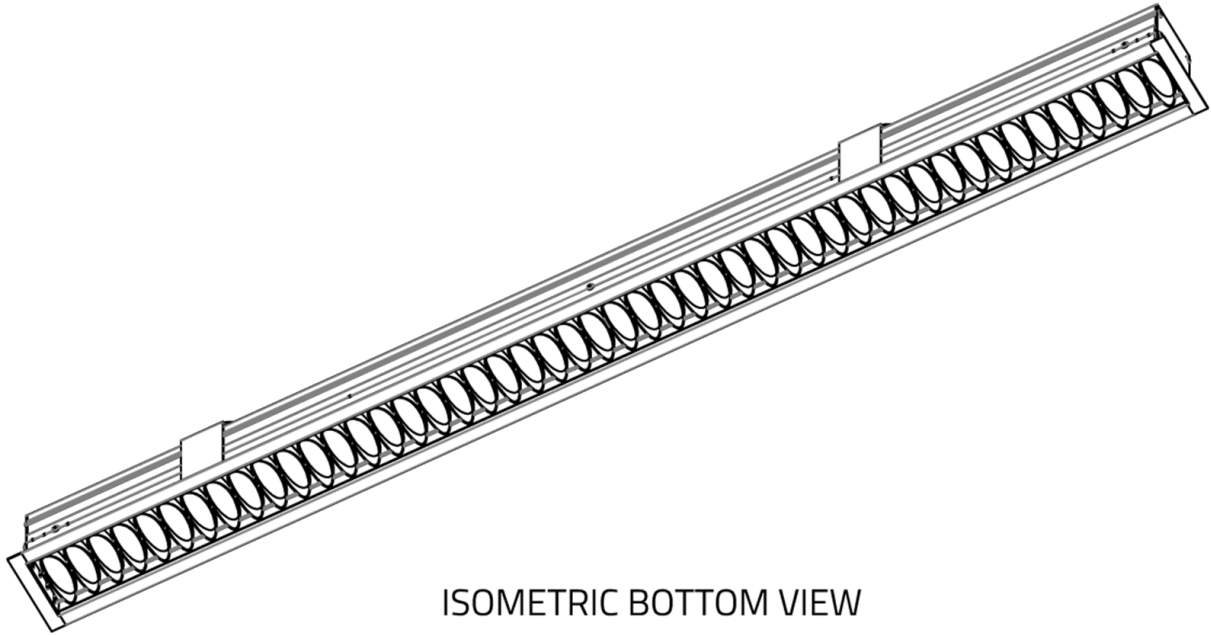


ISOMETRIC BOTTOM VIEW

Top View
(Asymmetric Light Direction)

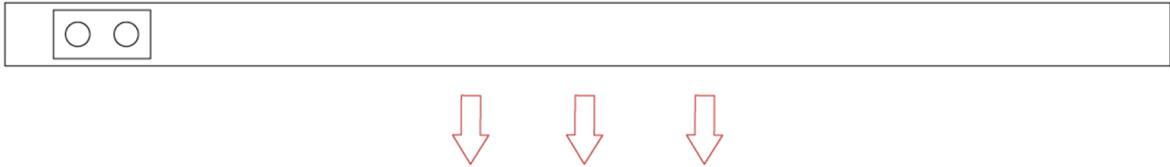


Grid Ceiling - Tegular ceiling

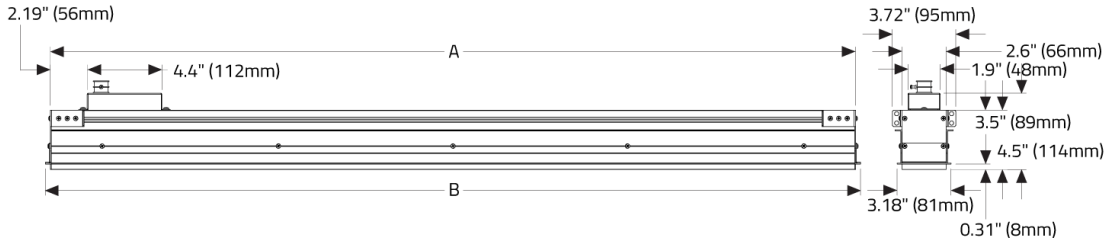


Max Length (Per section)	A	B
4ft	46.82" (1189mm)	47.7" (1212mm)
6ft	70.82" (1791mm)	71.7" (1821mm)
8ft	94.82" (2408mm)	95.7" (2431mm)
10ft	118.82" (3018mm)	119.7" (3040mm)
12ft	142.82" (3627mm)	143.7" (3650mm)

Grid Ceiling - T-bar ceiling

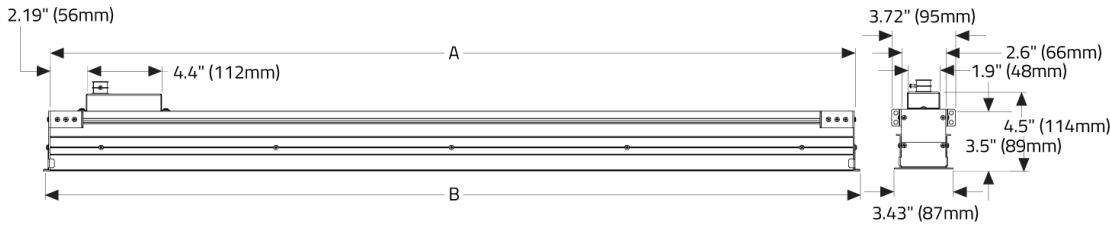


Max Length (Per section)	A	B
4ft	46.82" (1189mm)	47.7" (1212mm)
6ft	70.82" (1791mm)	71.7" (1821mm)
8ft	94.82" (2408mm)	95.7" (2431mm)
10ft	118.82" (3018mm)	119.7" (3040mm)
12ft	142.82" (3627mm)	143.7" (3650mm)

Hard Ceiling - Trimless

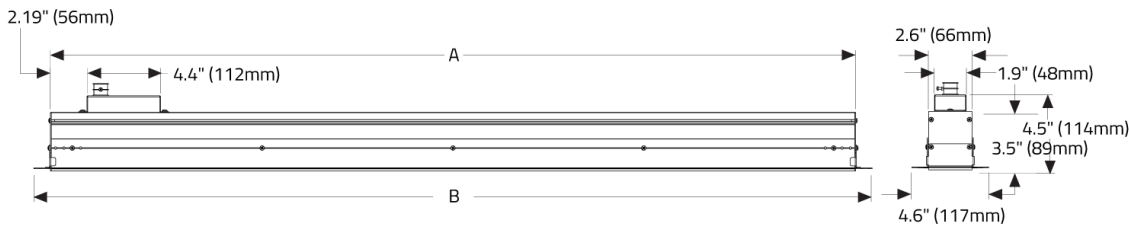

Max Length (Per section)	A	B
4ft	48.1" (1222mm)	50.1" (1273mm)
6ft	72.1" (1831mm)	74.1" (1882mm)
8ft	96.1" (2431mm)	98.1" (2492mm)
10ft	120.1" (3050mm)	122.1" (3040mm)
12ft	144.1" (3660mm)	146.1" (3711mm)

Hard Ceiling - Trim

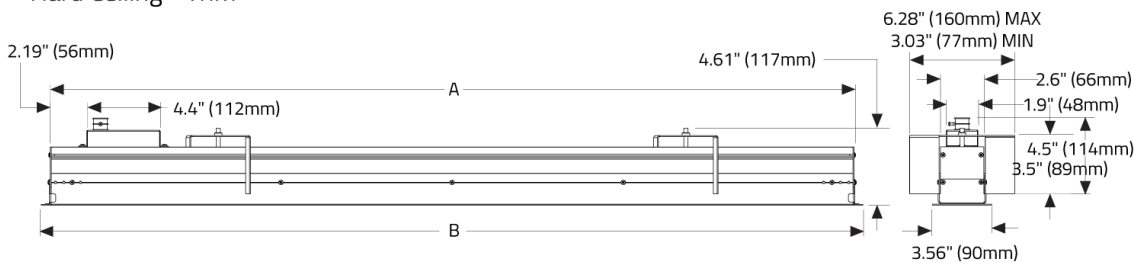

Max Length (Per section)	A	B
4ft	48.1" (1222mm)	59.04" (1246mm)
6ft	72.1" (1831mm)	73.04" (1855mm)
8ft	96.1" (2431mm)	97.04" (2465mm)
10ft	120.1" (3050mm)	121.04" (3074mm)
12ft	144.1" (3660mm)	145.04" (3684mm)