




OOOOH SYSTEMS™

FULL SPECIFICATION SHEET

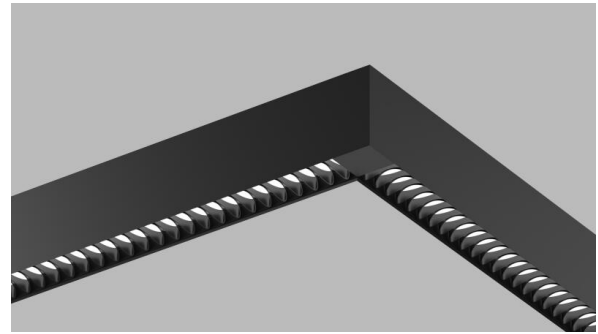

FIXTURE TYPE



FIXTURE CODE




QUANTITIES

1 DESCRIPTION

OOOOH dazzles up traditional linear lighting concepts with an innovative louvre system. An array of ellipses is incurved to conform to a tunnel-shaped profile creating a subtle aesthetic and sublime lighting effect. The louvre system not only tempers the starkness of the commonly exposed diffuser and adds an enchanting decorative feature, but also offers visual comfort by minimizing glare. The injection-molded louvers come in 5 finishes: Black for the highest glare control, White for higher reflectance and performance, and for an interior design enhancement, satinized finishes Satin Chrome, Satin Gold, and Satin Champagne. Build a continuous lighting plan with the new **OOOOH SYSTEMS** option.

2 OPTICS & FEATURES

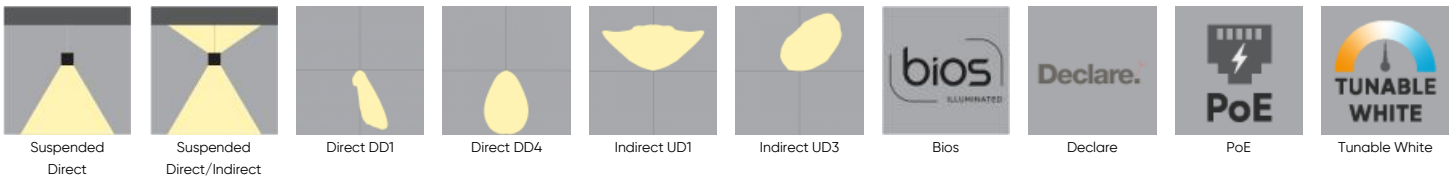

3 APPROVALS



4 GENERAL SPECIFICATION

BODY

Aluminum.

SUSPENSION

Steel cables.

POE

Can be integrated into your data network via Power over Ethernet (PoE) connectivity.

DRIVERS

HPF electronic drivers for 120–277V, 347V (EU–240V). The driver is integral to the fixture housing.

FIXTURE LENGTHS

Available in 1" increments. Contact the factory for details.

ESTIMATED L70 @25°C (77°F)

> 165,000 hrs @ 2000 lumens/ft (6000 lumens/m)

MECHANICAL

Luminaires mount directly over J box (by others).

SENSORS

Compatible with Avi-On, Casambi, Enlighted, Lutron Vive, nLight, NX Lighting Controls, Osram, Philips, and others. Consult factory.

RGBW

RGBW available, consult factory.

DESIGNED BY

Serge Cornelissen.

SEISMIC BRACING

Seismic bracing kits are available to meet compliance requirements. Consult the factory for details.

FINISH

Powder coated

POWER CABLE

Silver braided.

BIOS

For circadian lighting, consult factory.

LENS

Opal acrylic. 2.4" width.

REPORTED L70 @25°C (77°F)

> 60,000 hrs @ 2000 lumens/ft (6000 lumens/m)

DELIVERED LUMENS

Delivered lumens & LPW based on 4000K CRI 80+

INTEGRAL EMERGENCY SYSTEM

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The self contained system includes the inverter module, NiCad batteries, LED charge indicator and test switch (NA only). Not available with a 347V supply.

TUNABLE WHITE

Tunable White range from 2700K to 6500K is available; contact the factory for details.

APPROVALS

Damp Location (Indoor use only).

DESIGN


US Pat. No. D969,395.

SUSTAINABILITY

Designed for on-site LED board, driver, and optic replacement. Contact the factory for maintenance documentation.

5 DESIGN OPTIONS

LOUVER

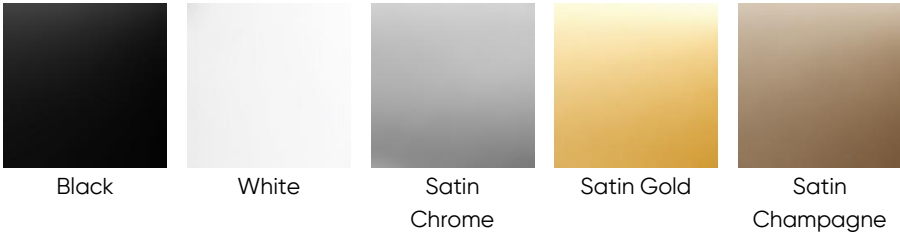


FINISH



¹ Wood grain finishes may incur longer lead times and setup charges. Consult factory for details.

CANOPY FINISH

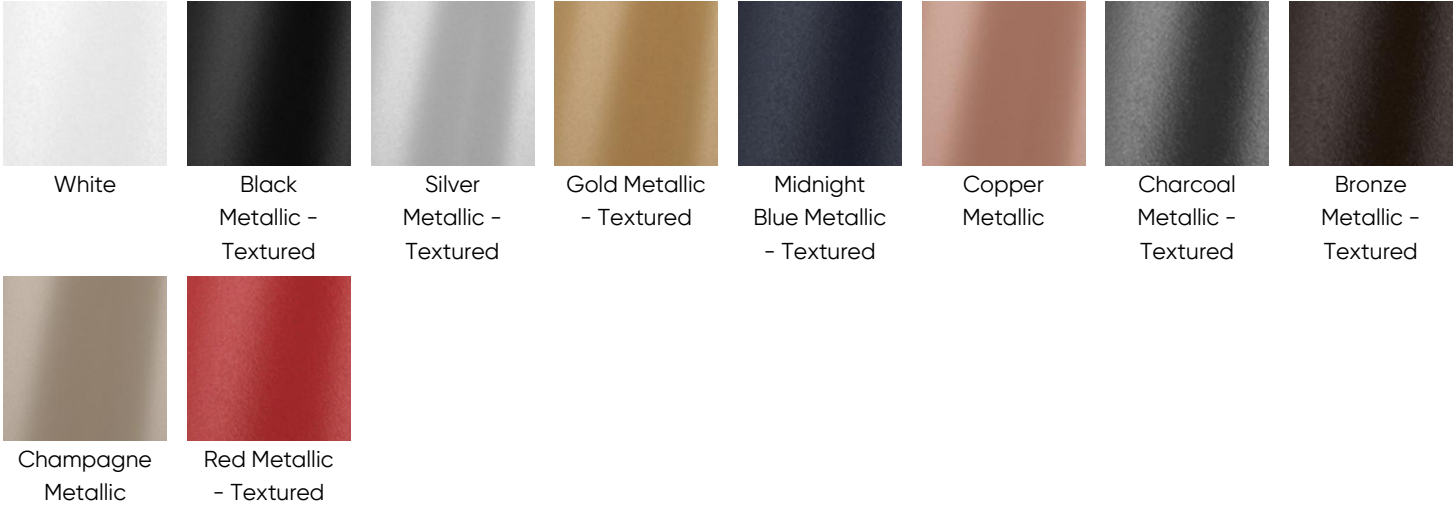

6 HOW TO ORDER

1. Choose a Module

Make a selection from one of the following 7 sections. One power cord for every 50 linear feet. Connection parts for each section are shipped separately for on site assembly. Project drawings are not required for this product.

STRAIGHT SECTION 2FT

HL1PSL02 2ft middle section Direct	HL1PSM02 2ft middle section with power cord Direct	HL1PSN02 2ft section with end cap Direct	HL1PSP02 2ft section with end cap and power cord Direct
--	--	--	---

Available as Direct only.

STRAIGHT SECTION 4FT

HL1PSL04 4ft middle section Direct	HL1PSM04 4ft middle section with power cord Direct	HL1PSN04 4ft section with end cap Direct	HL1PSP04 4ft section with end cap and power cord Direct
HL2PSL04 4ft middle section Direct/Indirect	HL2PSM04 4ft middle section with power cord Direct/Indirect	HL2PSN04 4ft section with end cap Direct/Indirect	HL2PSP04 4ft section with end cap and power cord Direct/Indirect

STRAIGHT SECTION 6FT

HL1PSL06 6ft middle section Direct	HL1PSM06 6ft middle section with power cord Direct	HL1PSN06 6ft section with end cap Direct	HL1PSP06 6ft section with end cap and power cord Direct
HL2PSL06 6ft middle section Direct/Indirect	HL2PSM06 6ft middle section with power cord Direct/Indirect	HL2PSN06 6ft section with end cap Direct/Indirect	HL2PSP06 6ft section with end cap and power cord Direct/Indirect

STRAIGHT SECTION 8FT

HL1PSL08 8ft middle section Direct	HL1PSM08 8ft middle section with power cord Direct	HL1PSN08 8ft section with end cap Direct	HL1PSP08 8ft section with end cap and power cord Direct
HL2PSL08 8ft middle section Direct/Indirect	HL2PSM08 8ft middle section with power cord Direct/Indirect	HL2PSN08 8ft section with end cap Direct/Indirect	HL2PSP08 8ft section with end cap and power cord Direct/Indirect

STRAIGHT SECTION 10FT

HL1PSL10 10ft middle section Direct	HL1PSM10 10ft middle section with power cord Direct	HL1PSN10 10ft section with end cap Direct	HL1PSP10 10ft section with end cap and power cord Direct
HL2PSL10 10ft middle section Direct/Indirect	HL2PSM10 10ft middle section with power cord Direct/Indirect	HL2PSN10 10ft section with end cap Direct/Indirect	HL2PSP10 10ft section with end cap and power cord Direct/Indirect

STRAIGHT SECTION 12FT

HL1PSL12 12ft middle section Direct	HL1PSM12 12ft middle section with power cord Direct	HL1PSN12 12ft section with end cap Direct	HL1PSP12 12ft section with end cap and power cord Direct
HL2PSL12 12ft middle section Direct/Indirect	HL2PSM12 12ft middle section with power cord Direct/Indirect	HL2PSN12 12ft section with end cap Direct/Indirect	HL2PSP12 12ft section with end cap and power cord Direct/Indirect

CORNER SECTION (27"X27" L SHAPE)

HL1PSL01 Corner with no end caps Direct	HL1PSM01 Corner middle with power cord Direct	HL1PSN01 Corner with Left end cap Direct	HL1PSP01 Corner with Right end cap Direct
HL1PSP01 Corner with Left end cap and power cord Direct	HL1PSP03 Corner with Right end cap and power cord Direct	HL2PSL01 Corner with no end caps Direct/Indirect	HL2PSM01 Corner middle with power cord Direct/Indirect
HL2PSN01 Corner with Left end cap Direct/Indirect	HL2PSN03 Corner with Right end cap Direct/Indirect	HL2PSP01 Corner with Left end cap and power cord Direct/Indirect	HL2PSP03 Corner with Right end cap and power cord Direct/Indirect

2. LOUVER

LV2 Black	LV3 White	LV4 Satin Chrome	LV6 Satin Gold
LV9 Satin Champagne			

3. LM/FT (DIRECT)

LPF020 200 lm/ft	LPF030 300 lm/ft	LPF040 400 lm/ft	LPF050 500 lm/ft
LPF060 600 lm/ft	LPF070 700 lm/ft	LPF080 800 lm/ft	LPF100 1000 lm/ft
LPF120 1200 lm/ft	LPF130 1300 lm/ft		

Lumens/ft are determined by the color of the Louver. Consult website for available lumens/ft based on selected louver.

4. LM/FT (INDIRECT)

LPG000 Not required	LPG020 200 lm/ft	LPG040 400 lm/ft	LPG060 600 lm/ft
LPG080 800 lm/ft	LPG100 1000 lm/ft	LPG120 1200 lm/ft	LPG140 1400 lm/ft
LPG160 1650 lm/ft			

Consult website for available lumens/ft. All data shown based on DD3 diffuser.

5. CRI

CR80 CRI 80+	CR90 CRI 90+
---------------------	---------------------

6. CCT (DIRECT)

CTA27 2700K	CTA30 3000K	CTA35 3500K	CTA40 4000K
CTA60 Tunable White ¹			

¹ Consult factory.

7. CCT (INDIRECT)

CTB00 Not required	CTB27 2700K	CTB30 3000K	CTB35 3500K
CTB40 4000K	CTB60 Tunable White ¹		

¹ Consult factory.

8. DIRECT LENS

DD1 Asymmetric ¹	DD4 Comfort
------------------------------------	--------------------

¹ When standing at the end view of the profile on the side where the power cord is installed, the asymmetric beam will aim to the right.

9. INDIRECT LENS

UD0 Not required	UD1 Batwing	UD3 Asymmetric ¹
-------------------------	--------------------	------------------------------------

¹ Available up to 1200 lm/ft.

10. BLACKOUT PLATE

UB00 Not required	UB_ _ Blackout plate ¹
--------------------------	--

¹ Available on a per foot basis. May be required to prevent lighting up duct work in a loft type application.

11. VOLTAGE

V1 120/277V	V2 240V ¹	V3 347V ²	V4 Low Voltage ³
--------------------	-----------------------------	-----------------------------	------------------------------------

¹ Not available in North America. ² Only available with DA01 dimming. ³ Only available with DA45 dimming.

12. DIMMING

DA01 0-10V Dimming 1.0%	DA02 0-10V Dimming 0.1% ¹	DA20 DALI Dimming 0.1% ¹	DA21 DALI Dimming 1.0% ¹
DA30 DSI/switchDim ²	DA45 PoE ³		

¹ Not available with 347V. ² Not available in North America. ³ Only available with V4.

13. CEILING TYPE

G1 Grid ceiling ¹	H1 Hard ceiling ²
-------------------------------------	-------------------------------------

The cost for the canopies, power cables, connections mechanisms and endcaps for the fixture has been added to these items.

¹ Combo kit provided includes installation to T-bar and through tile mount. ² Designed for drywall ceilings.

14. SUSPENSION

HLA03 3ft cable suspension	HLA06 6ft cable suspension	HLA09 9ft cable suspension
-----------------------------------	-----------------------------------	-----------------------------------

15. FIXTURE FINISH

FA01 White – Textured	FA02 Black Metallic – Textured	FA20 Silver Metallic – Textured	FA25 Gold Metallic – Textured
FA27 Wood grain – Light Cherry ¹	FA28 Wood grain – Dark Walnut ¹	FA30 Wood grain – White Oak ¹	FA44 Midnight Blue Metallic – Textured
FA45 Copper Metallic	FA46 Charcoal Metallic – Textured	FA47 Bronze Metallic – Textured	FA52 Champagne Metallic
FA53 Red Metallic – Textured			

¹ Wood grain finishes may incur longer lead times and setup charges. Consult factory for details.

16. CANOPY FINISH

CF01 White	CF02 Black Metallic – Textured	CF20 Silver Metallic – Textured	CF25 Gold Metallic – Textured
CF44 Midnight Blue Metallic – Textured	CF45 Copper Metallic	CF46 Charcoal Metallic – Textured	CF47 Bronze Metallic – Textured
CF52 Champagne Metallic	CF53 Red Metallic – Textured		

17. EMERGENCY

E0 Not required	E1 Emergency system – Integral ¹	E3 Emergency generator circuit ¹
------------------------	--	--

¹ A drawing will be required at time of ordering to determine the required number and location of the emergency sections or generator circuits. Available upon request, consult factory for details. Not available with 347V.

18. CIRCUITS

CS1 Single circuit

CS2 Dual circuit ¹


¹ Independent control of upright for LELP2P.

19. SENSORS

Compatible with Avi-On, Casambi, Enlighted, Lutron Vive, nLight, NX Lighting Controls, Osram, Philips, and others. Consult factory.


7 PERFORMANCE DATA

DIRECT COMFORT (DD4) – WHITE LOUVER




LUMEN/FT	WATT/FT	LPW
1300	13	106
1200	11	108
1000	9	110
800	7	114
700	6	115
600	5	117
500	4	119
400	3	121
300	3	126
200	2	128

DIRECT COMFORT (DD4) – BLACK LOUVER




LUMEN/FT	WATT/FT	LPW
700	13	57
600	11	58
500	9	59
400	7	61
300	5	63
200	3	65

DIRECT COMFORT (DD4) – SATIN CHROME LOUVER




LUMEN/FT	WATT/FT	LPW
1000	13	84
800	9	87
700	9	89
600	7	90
500	5	93
400	4	95
300	3	95
200	2	98

DIRECT COMFORT (DD4) – SATIN GOLD LOUVER




LUMEN/FT	WATT/FT	LPW
1000	13	82
800	9	85
700	9	87
600	7	88
500	5	91
400	4	93
300	3	93
200	2	96

DIRECT COMFORT (DD4) – SATIN CHAMPAGNE LOUVER



LUMEN/FT	WATT/FT	LPW
1000	13	84
800	9	87
700	9	89
600	7	90
500	5	93
400	4	95
300	3	95
200	2	98

DIRECT ASYMMETRIC (DD1) – WHITE LOUVER




LUMEN/FT	WATT/FT	LPW
1200	13	100
1000	11	101
800	9	105
700	7	107
600	6	108
500	5	110
400	4	112
300	3	113
200	2	116


INDIRECT BATWING (UD1)	LUMEN/FT	WATT/FT	LPW	INDIRECT ASYMMETRIC (UD3)	LUMEN/FT	WATT/FT	LPW
	1600	13	133		1200	13	97
	1400	10	138		1000	10	100
	1200	9	141		800	9	102
	1000	7	145		600	6	107
	800	6	147		400	4	109
	600	4	151		200	2	112
	400	3	154				
	200	1	154				

8 TM-30 DATA


CCT 2700K

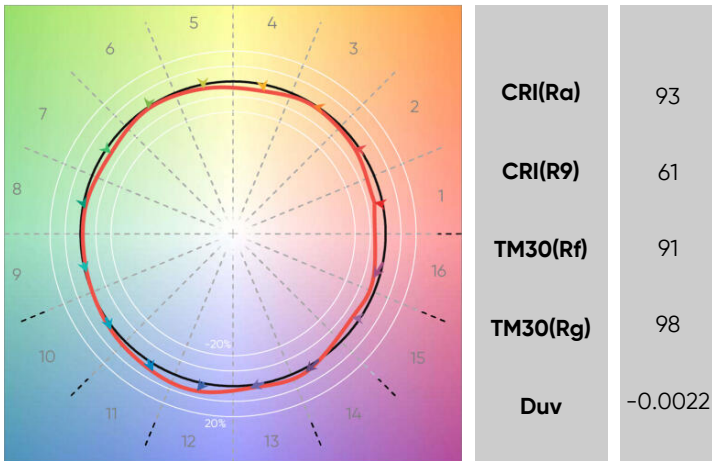


CCT 3000K

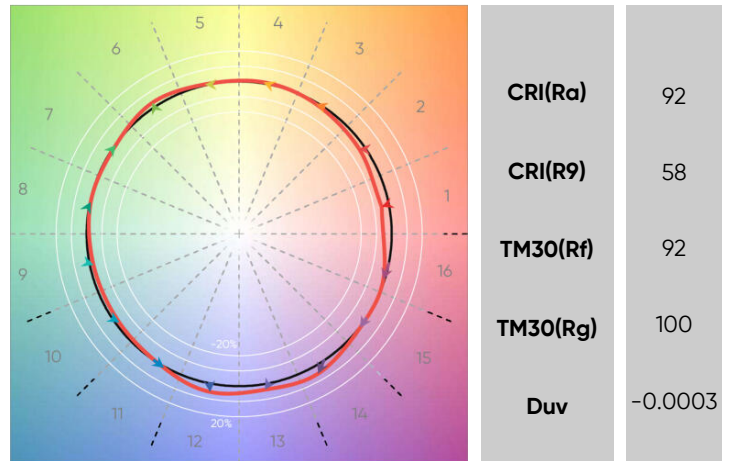



CCT 3500K

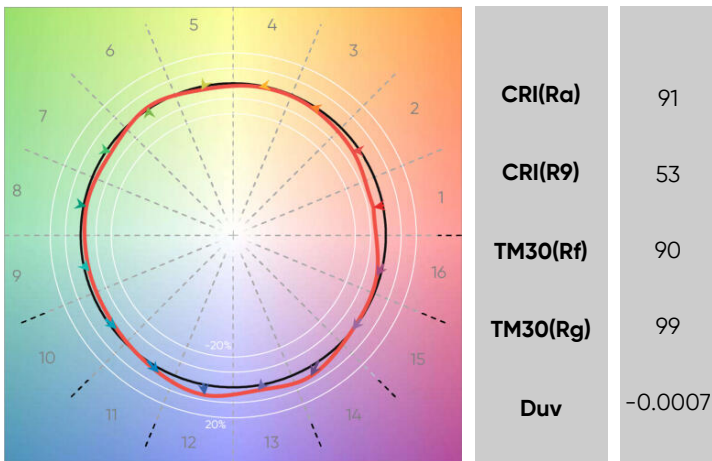



CCT 4000K

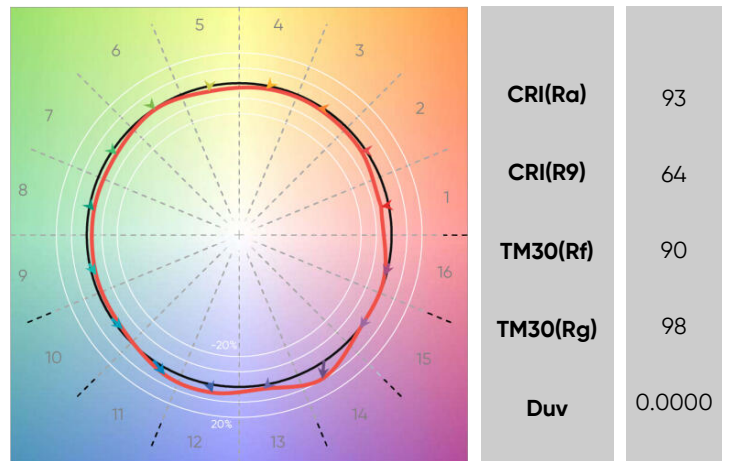

9 DIMENSIONAL DIAGRAMS

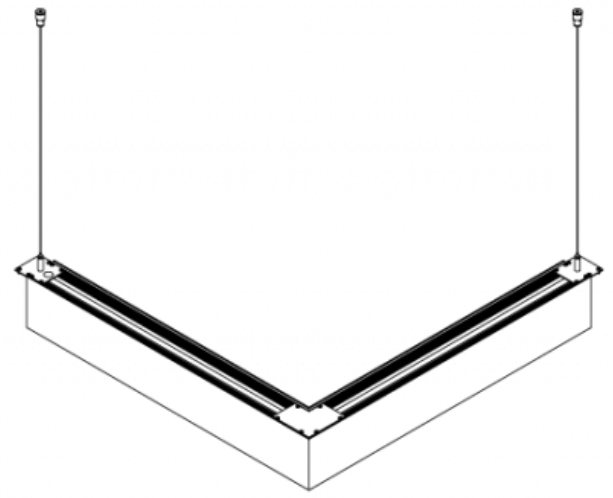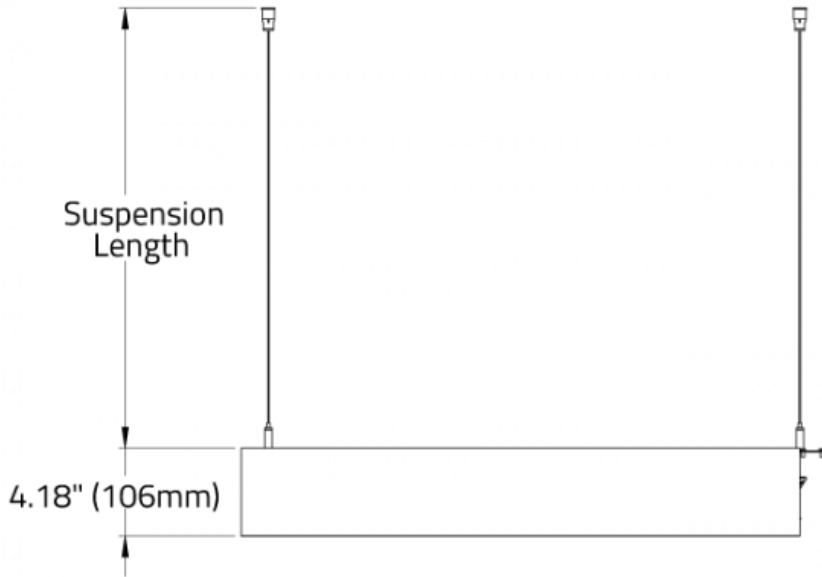

ISOMETRIC TOP VIEW

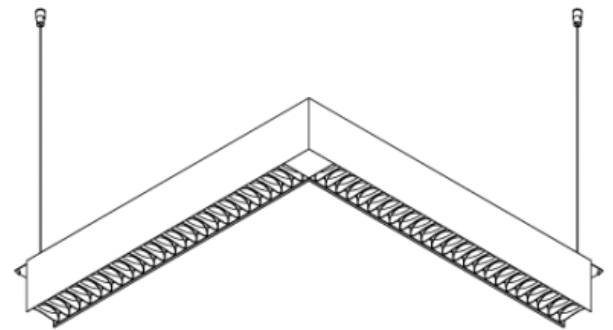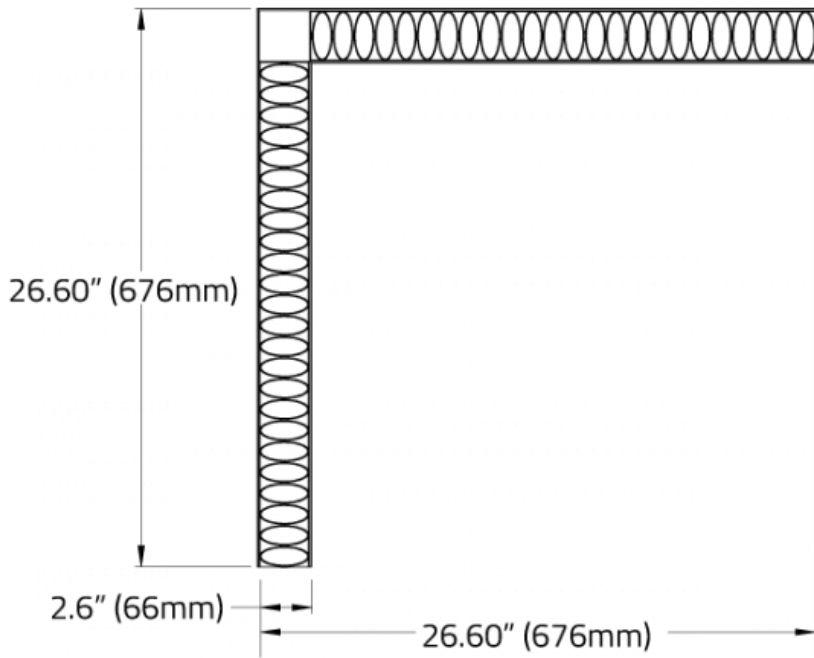

ISOMETRIC BOTTOM VIEW