

0000H™ - CONTINUOUS WALL

Project Name:

Fixture Type:

Fixture Code:

Quantities:

A. LUMINAIRE

HLNW1W Direct

HLNW2W Direct/Indirect

One power cord for every 50 linear feet.

B. LENGTH OF RUN

SFA _ _ _ _

The minimum length of order is 4ft. Lengths are to be in 2ft increments. For 6 inch increments, consult factory.

Example: 4ft = SFA0400

Example: 10ft = SFA1000

Example: 50ft = SFA5000

For runs over 50ft in length, consult factory.

C. MAX LENGTH PER SECTION

SL04 4ft

SL06 6ft

SL08 8ft

SL10 10ft

SL12 12ft

You can select the preferred maximum length per segment, to account for transportation and building constraints. Example: If a 40ft run is required and SL12 (12ft) is selected, we would provide 4 10ft segments. For special requirements, please contact sales@betacalco.com.

D. LOUVER

LV2 Black

LV3 White

LV4 Satin Chrome

LV6 Satin Gold ¹

LV9 Satin Champagne ¹

¹ There will be a slight color cast on the wall when using the Satin Gold or Satin Champagne louvers.

E. LM/FT (DIRECT)

LPF020 200 lm/ft

LPF030 300 lm/ft

LPF040 400 lm/ft

LPF050 500 lm/ft

LPF060 600 lm/ft

LPF070 700 lm/ft

LPF080 800 lm/ft

LPF100 1000 lm/ft

LPF120 1200 lm/ft

LPF130 1300 lm/ft

Lumens/ft are determined by the color of the Louver. Consult website for available lumens/ft based on selected louver.

F. LM/FT (INDIRECT)

LPG000 Not required

LPG020 200 lm/ft

LPG040 400 lm/ft

LPG060 600 lm/ft

LPG080 800 lm/ft

LPG100 1000 lm/ft

LPG120 1200 lm/ft

LPG140 1400 lm/ft

LPG165 1650 lm/ft

Consult website for available lumens/ft based on selected louver.

G. CRI

CR80 CRI 80+

CR90 CRI 90+



0000H™ - CONTINUOUS WALL

H. CCT DIRECT

CTA27 2700K **CTA30** 3000K **CTA35** 3500K **CTA40** 4000K

I. CCT INDIRECT

CTB00 Not required **CTB27** 2700K **CTB30** 3000K **CTB35** 3500K
CTB40 4000K

J. DIRECT DIFFUSER

DD1 Asymmetric diffuser **DD4** Comfort Diffuser

K. UPLIGHT DIFFUSER

UD0 Not required **UD2** Opal diffuser **UD3** Asymmetric diffuser ¹

¹ Available up to 1200 lm/ft. The asymmetric distribution will be directed away from the wall.

L. UPLIGHT BLACKOUT PLATE

UB00 Not required **UB_ _** Blackout plate ¹

¹ Available on a per foot basis. May be required to prevent lighting up duct work in a loft type application.

M. VOLTAGE

V1 120/277V **V2** 240V ¹ **V3** 347V ² **V4** Low Voltage ³

¹ Not available in North America.

² Only available with DA01 dimming.

³ Only available with DA45 dimming.

N. DIMMING

DA01 0-10V Dimming 1.0% **DA02** 0-10V Dimming 0.1% ¹ **DA20** DALI Dimming 0.1% ¹ **DA21** DALI Dimming 1.0% ¹
DA30 DSI/switchDim ² **DA45** PoE ³

¹ Not available with V3.

² Not available in North America.

³ Only available with V4.

O. FIXTURE FINISH

FA01 White - Textured **FA02** Black Metallic - Textured **FA20** Silver Metallic - Textured **FA25** Gold Metallic - Textured
FA27 Wood grain - Light Cherry ¹ **FA28** Wood grain - Dark Walnut ¹ **FA44** Midnight Blue Metallic - Textured **FA45** Copper Metallic
FA46 Charcoal Metallic - Textured **FA47** Bronze Metallic - Textured **FA52** Champagne Metallic **FA53** Red Metallic - Textured

¹ Longer than normal lead times may apply, consult factory.

P. EMERGENCY

E0 Not required **E1** Emergency system - Integral ¹ **E3** Emergency generator circuit ¹

¹ A drawing will be required at time of ordering to determine the required number and location of the emergency sections or generator circuits. Not available in 347V.

Q. CIRCUITS

CS1 Single circuit **CS2** Dual circuit ¹







0000H™ - CONTINUOUS WALL

R. SENSORS


0000H™ - CONTINUOUS WALL

DIMENSIONAL DIAGRAMS

Isometric Views

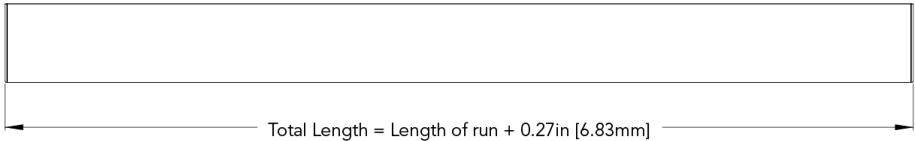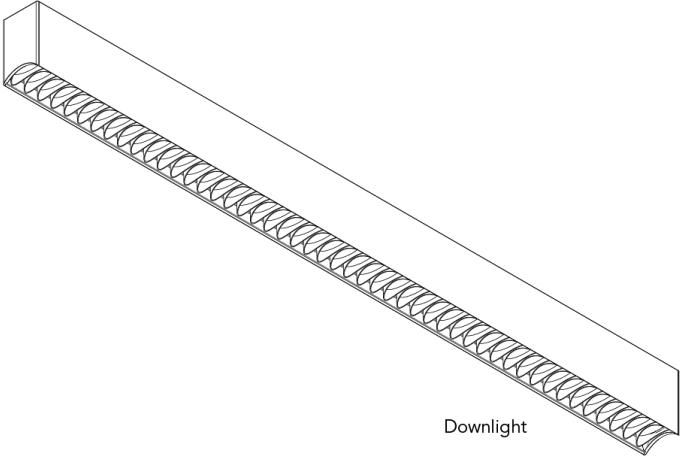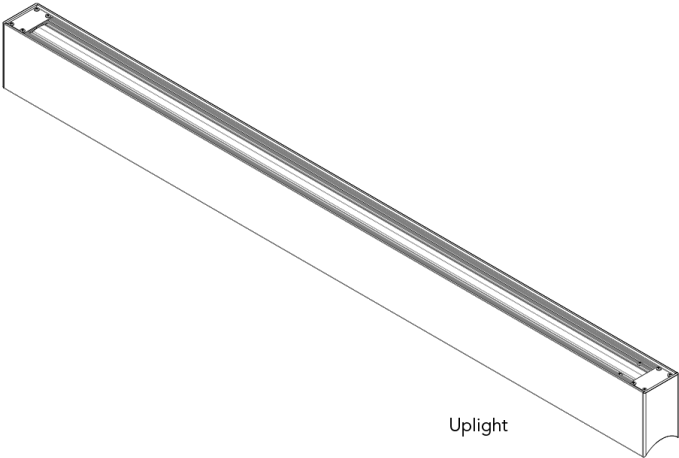

Top View [Uplight]




Bottom View [Downlight]


0000H™ - CONTINUOUS WALL

Wall Mount Configurations


4FT

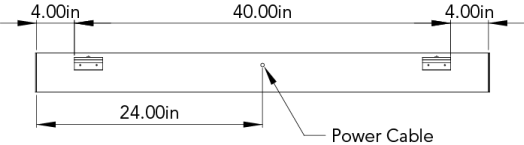


6FT

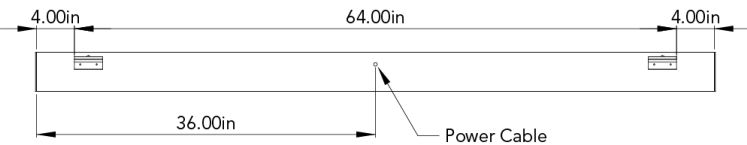

8FT

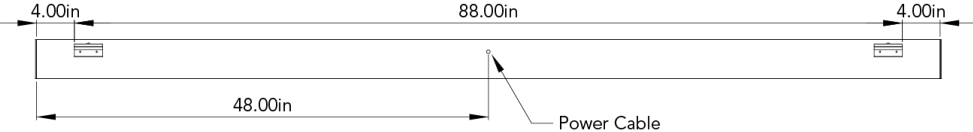

10FT

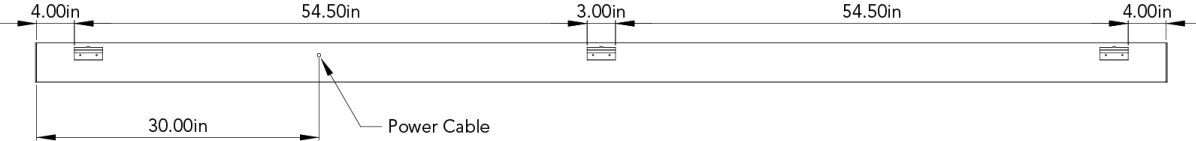

12FT

