PEYOTE™ - BOLLARDS

Project Name:

Fixture Type:

Fixture Code:

Quantities:



© 2026 Beta-Calco Inc. Specifications are subject to change without notice

PEYOTE™ - BOLLARDS

GENERAL SPECIFICATION

Housing
Die-cast and extruded aluminum.

External Screws
Stainless steel.

Lens
Clear polycarbonate.

Gaskets
One piece silicone.

Finish
Silver powder coated RAL9006 or black powder coated.

Drivers
HPF electronic, 120/277V (EU-240V). 0-10V dimming.

Cable entry
M20 cable gland.

Mounting
Anchorage rods required for concrete.

Delivered Lumens
Delivered lumens & LPW based on 3000K (min 80 CRI).

OPTICS & FEATURES



Ext-Bollards

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

PEYOTE™ - BOLLARDS

HOW TO ORDER

A. LUMINAIRE

8309100 360° , 933 lms

8309110 180° , 466 lms

8309120 2 x 90° , 466 lms

B. CCT

30 3000K (min 80 CRI)

40 4000K (min 80 CRI)

C. FINISH

BL Black

GR Light Gray RAL 9006

D. OPTIONS

8309199 Anchorage base for poured concrete

TECHNICAL DATA

LUMINAIRE


Code	8309100	8309110	8309120
Power (LED)	14W	14W	14W
Delivered lms	933	466	466
LPW	67	33	33
Distibution	360°	180°	2 x 90°


APPROVALS

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

PEYOTE™ - BOLLARDS

DIMENSIONAL DIAGRAMS

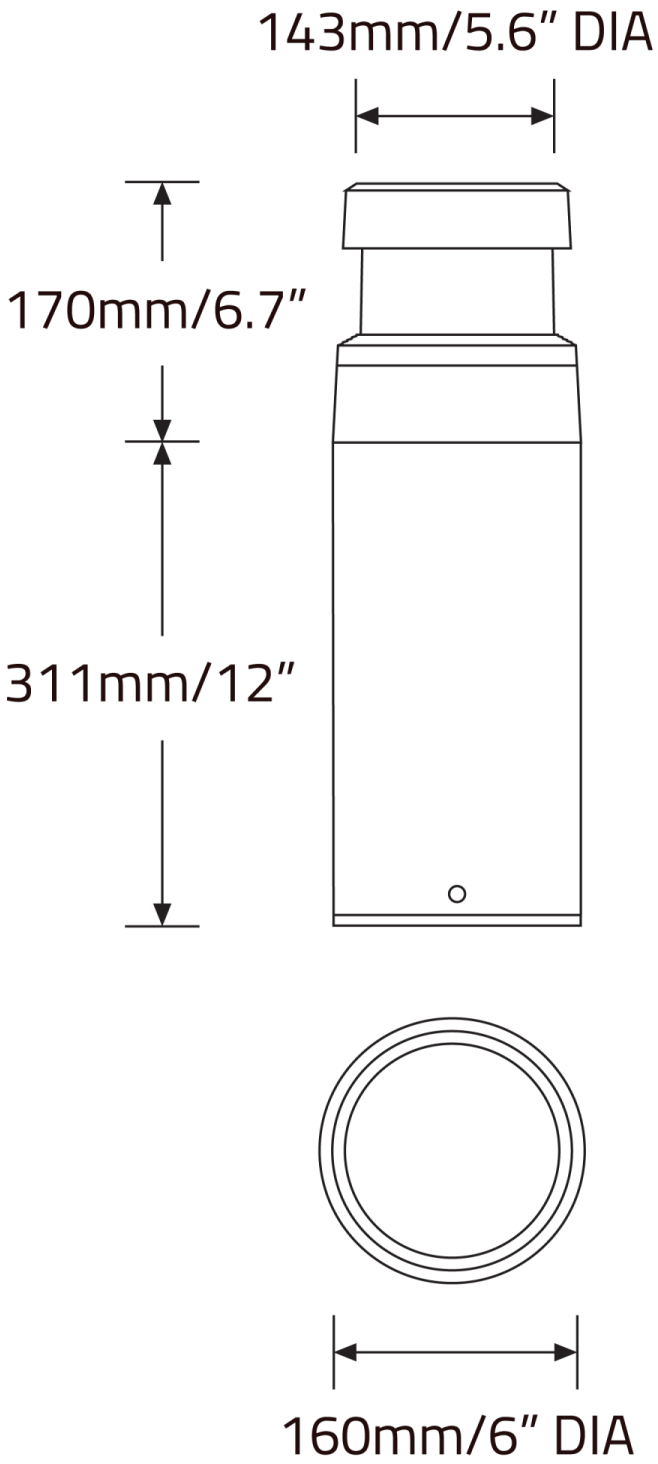

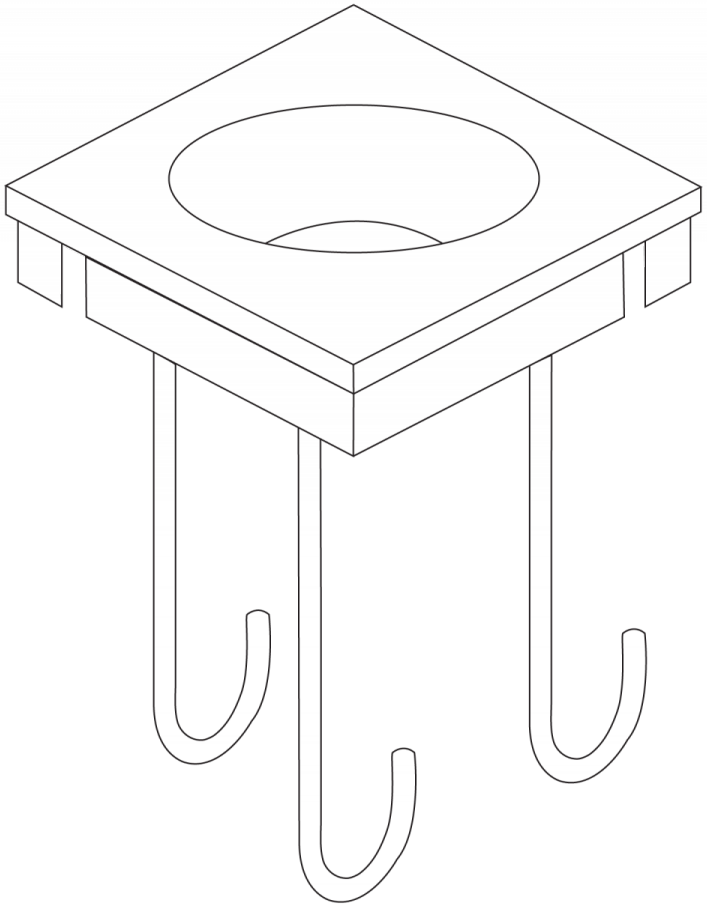

© 2026 Beta-Calco Inc. Specifications are subject to change without notice