PEYOTE™ - WALL SURFACE EXTERIOR

Project Name:

Fixture Type:

Fixture Code:

Quantities:



© 2026 Beta-Calco Inc. Specifications are subject to change without notice

PEYOTE™ - WALL SURFACE EXTERIOR

GENERAL SPECIFICATION

Housing
Die-cast and extruded aluminium.

Lens
Clear glass.

Finish
Silver powder coated light gray or black coated as standard. *(For custom finishes please contact factory).*

Minimum Starting Temperature
-30°C.

Delivered Lumens
Delivered lumens & LPW based on 3000K (min 80 CRI).

External Screws
Stainless steel.

Gaskets
One piece silicone.

Drivers
HPF, electronic for 120-277V (EU-240V).

Weight
Maximum 8.8lb.

OPTICS & FEATURES


Ext-Wall Downlight


Ext-Wall Up/Down

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

PEYOTE™ - WALL SURFACE EXTERIOR

HOW TO ORDER

A. LUMINAIRE

8309000 360°, 933 lms

8309010 180°, 466 lms

8309020 2 x 90°, 466 lms

B. CCT

30 3000K (min 80 CRI)

40 4000K (min 80 CRI)

C. FINISH

BL Black

GR Light Gray

D. OPTIONS

8309099 Anchorage Base for poured concrete

TECHNICAL DATA

LUMINAIRE


Code	8309000	8309010	8309020
Power (LED)	14W	14W	14W
Delivered lms	933	466	466
LPW	67	33	33
Distibution	360°	180°	2 x 90°

APPROVALS

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

PEYOTE™ - WALL SURFACE EXTERIOR

DIMENSIONAL DIAGRAMS

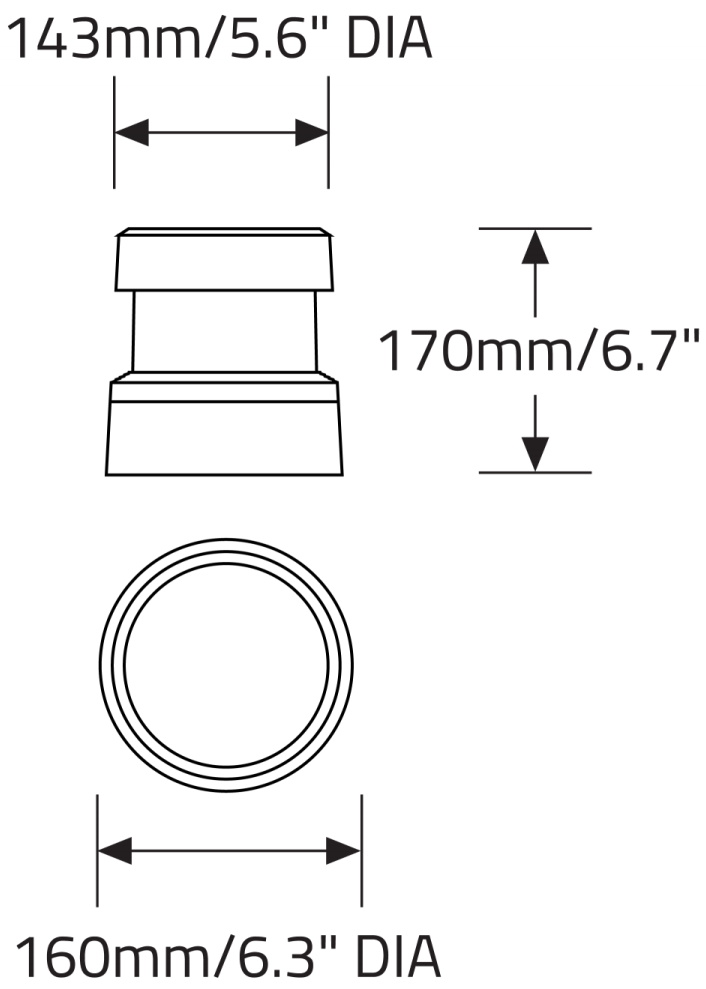

© 2026 Beta-Calco Inc. Specifications are subject to change without notice