

POLO™ - CEILING SURFACE



Project Name:

Fixture Type:

Fixture Code:

Quantities:

A. LUMINAIRE

PLPC1C02 24", 8000 lms

PLPC1C03 36", 12000 lms

PLPC1C04 48", 16000 lms

PLPC1C05 60", 22000 lms

All data shown at max output and nominal values.

B. LUMENS/FT

LFA050 500 lm/ft¹

LFA065 650 lm/ft²

LFA100 1000 lm/ft³

LFA130 1300 lm/ft⁴

C. CRI

CR80 CRI 80+

D. CCT

CTA27 2700K

CTA30 3000K

CTA35 3500K

CTA40 4000K

E. VOLTAGE

V1 120/277V

V2 240V¹

V3 347V²

V4 Low Voltage³

¹ Not available in North America.

² Available with DA01 dimming only.

³ To be used with DA45 only.

F. DIMMING

DA01 0-10V Dimming 1.0%

DA02 0-10V Dimming 0.1%

DA20 DALI Dimming 0.1%

DA21 DALI Dimming 1.0%

DA30 DSI/switchDim¹

DA45 PoE²

¹ Not available in North America.

² Must be used with V4 only.

G. EMERGENCY

E0 Not required


E2 Emergency system - Remote

Integral emergency not available.




POLO™ - CEILING SURFACE

DIMENSIONAL DIAGRAMS

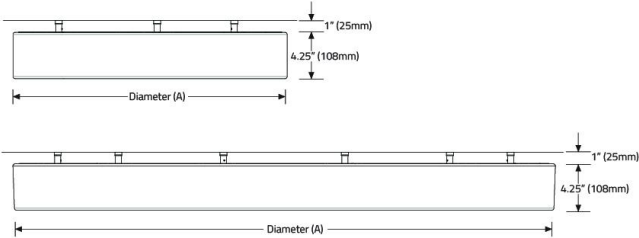

PLPC1C02 - 3 Mounting Points PLPC1C04 - 6 Mounting Points
 PLPC1C03 - 3 Mounting Points PLPC1C05 - 6 Mounting Points

DIAMETER (A)	DIAMETER (B)	WIDTH
24.5" (622mm)	15.5" (394mm)	4.5" (114mm)
36.6" (930mm)	26.9" (683mm)	5" (127mm)
48.7" (1237mm)	38.7" (983mm)	5" (127mm)
61.3" (1556mm)	51" (1295mm)	5" (127mm)

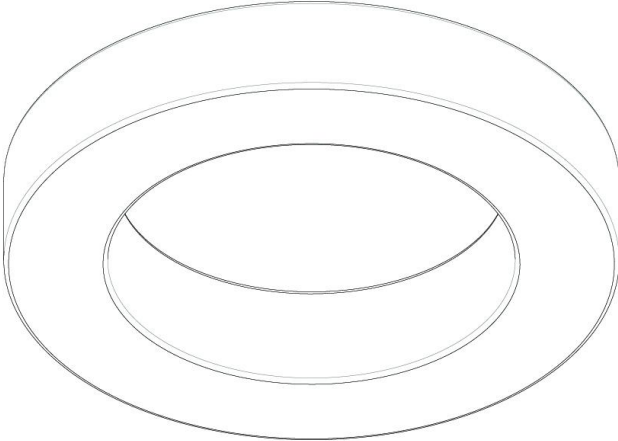

ISOMETRIC VIEW

