
Project Name: Fixture Type:

Fixture Code: Quantities:







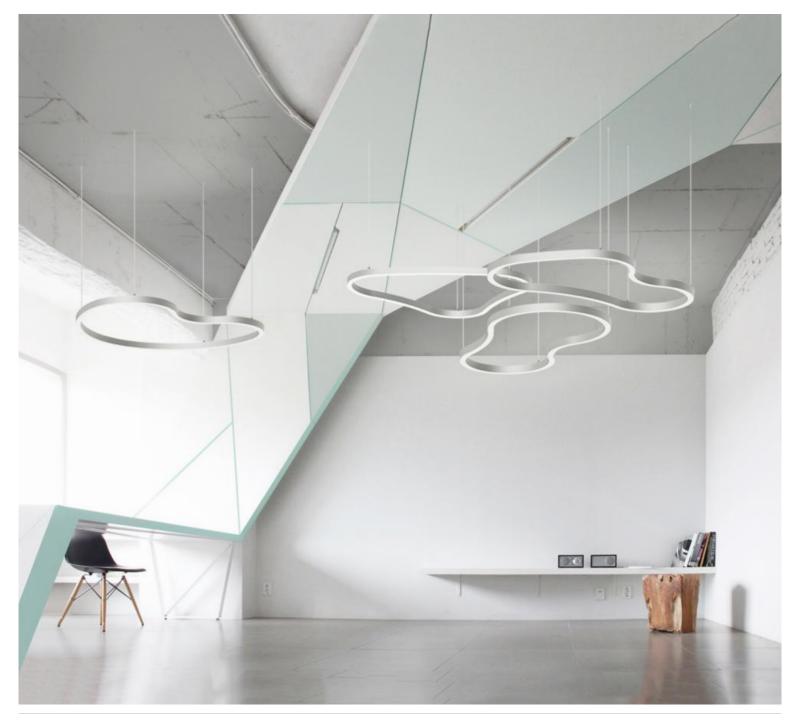



Buoyant and cheerful, PUZZLE is a collection of curvilinear pendants consisting of 5 organic shapes each with 3 sizes. What these shapes are is an enigma left open to the individual's imagination and designed for creating remarkable configurations that complement a variety of design themes.

#### **GENERAL SPECIFICATION**

Body

Aluminum.

Suspension

Steel cables.

**Remote Emergency** 

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch (NA only) Maximum distance between wall/ceiling plate and luminaire is 15'/4.5m. Test switch fits a single gang box (not supplied).

**Drivers** 

HPF electronic drivers for 120-277V, 37V (EU-240V). Drivers are either remote mounted or integral to the canopy depending on the size of the fixture.

Mechanical

Luminaires mount directly over J box (by others - North America only).

**Delivered Lumens** 

Delivered lumens & LPW based on 4000K (min 80 CRI).

**Approvals** 

Damp Rated.

**Finish** 

Powder coated.

Power cable

Silver braided.

**Remote Mounting Of Drivers** 

Wire Size 18 AWG - Max distance (from fixture to drivers) 40' (12.2m), Wire size 16 AWG - Max distance 60' (18.3m), Wire size 14 AWG - Max distance 90 (27.4m). Drivers must be accessible after installation.

Diffuser

Protruding Lens (0.9"/2.1mm).

Sensors

Consult factory regarding sensor compatibility.

Reported L70 @25°C (77°F)


> 50,000 hrs.

Patent No.

D827909, D827187, D827908, D828611, D827907.

#### **MOUNTING & OPTICS**











Direct

Declare

#### **HOW TO ORDER**

#### A. CHOOSE SHAPE AND SIZE

Select from one of the following 5 shapes. Three sizes per Shape, consult dimensional diagrams for actual sizes.

#### SHAPE "A"



**PULP1P01** A1, Direct, 3200 lms **PULP2P02** A2 Direct/Indirect, 10300 lms

**PULP1P02** A2, Direct, 5100 lms **PULP2P03** A3 Direct/Indirect, 14100 lms

**PULP1P03** A3, Direct, 7000 lms

PULP2P01 A1, Direct/Indirect, 6700 lms

#### SHAPE "B"



**PULP1P04** B1 Direct, 3000 lms **PULP2P05** B2, Direct/Indirect, 9500 lms

**PULP1P05** B2 Direct, 4800 lms **PULP2P06** B3 Direct/Indirect, 13400 lms

**PULP1P06** B3 Direct, 6600 lms

PULP2P04 B1, Direct/Indirect, 5700 lms

#### SHAPE "C"



**PULP1P07** C1 Direct, 3000 lms **PULP2P08** C2 Direct/Indirect, 9500 lms

**PULP1P08** C2 Direct, 4800 lms **PULP2P09** C3 Direct/Indirect, 13400 lms

PULP1P09 C3 Direct, 6600 lms

PULP2P07 C1 Direct/Indirect, 6300 lms

#### SHAPE "D"



**PULP1P10** D1 Direct, 3200 lms **PULP2P11** D2 Direct/Indirect, 10300 lms

**PULP1P11** D2 Direct, 5000 lms **PULP2P12** D3 Direct/Indirect, 14100 lms

PULP1P12 D3 Direct, 7000 lms

PULP2P10 D1 Direct/Indirect, 6700 lms

#### SHAPE "E"



PULP1P13 E1 Direct, 3000 lms
PULP2P14 E2 Direct/Indirect, 10300 lms

**PULP1P14** E2 Direct, 5000 lms **PULP2P15** E3 Direct/Indirect, 14100 lms

**PULP1P15** E3 Direct, 7000 lms

PULP2P13 E1, Direct/Indirect, 6300 lms

### **B. LUMENS (DIRECT)**

**LPF017** 175 lm/ft <sup>1</sup> **LPF026** 265 lm/ft <sup>2</sup> **LPF035** 350 lm/ft <sup>3</sup>

### C. LUMEN (INDIRECT)

**LPG000** Not required **LPG017** 175 lm/ft <sup>1</sup> **LPG026** 265 lm/ft <sup>2</sup> **LPG035** 350 lm/ft <sup>3</sup>

#### D. CRI

**CR80** CRI 80+ **CR90** CRI 90+

#### E. CCT (DIRECT)

#### F. CCT (INDIRECT)

**CTB00** Not required **CTB30** 3000K **CTB35** 3500K **CTB40** 4000K

#### **G. VOLTAGE**

**V1** 120/277V **V2** 240V <sup>1</sup> **V3** 347V <sup>2</sup>

FA53 Red Metallic - Textured

#### H. DIMMING

**DA01** 0-10V Dimming 1.0% **DA02** 0-10V Dimming 0.1% <sup>1</sup> **DA20** DALI Dimming 0.1% <sup>1</sup> **DA21** DALI Dimming 1.0% <sup>1</sup>

## I. SUSPENSION

**SS1** Vertical, Remote driver **SS3** Vertical, Driver Integral to Canopy <sup>1</sup>

FA52 Champagne Metallic

### J. FINISH

FA01 WhiteFA02 Black Metallic - TexturedFA20 Silver Metallic - TexturedFA25 Gold Metallic - TexturedFA44 Midnight Blue Metallic - TexturedFA45 Copper MetallicFA46 Charcoal Metallic - TexturedFA47 Bronze Metallic - Textured

#### **K. CANOPY FINISH**

CF01 WhiteCF02 Black Metallic - TexturedCF20 Silver Metallic - TexturedCF25 Gold Metallic - TexturedCF44 Midnight Blue Metallic - TexturedCF45 Copper MetallicCF46 Charcoal Metallic - TexturedCF47 Bronze Metallic - TexturedCF52 Champagne MetallicCF53 Red Metallic - Textured

<sup>&</sup>lt;sup>1</sup> Based of 50% of total output.

<sup>&</sup>lt;sup>2</sup> Based on 75% of total output.

 $<sup>^{\</sup>scriptsize 3}$  100% of total output.

<sup>&</sup>lt;sup>1</sup> Based of 50% of total output.

<sup>&</sup>lt;sup>2</sup> Based on 75% of total output.

<sup>&</sup>lt;sup>3</sup> 100% of total output.

<sup>&</sup>lt;sup>1</sup> Not available in North America.

<sup>&</sup>lt;sup>2</sup> Available with DA01 only.

<sup>&</sup>lt;sup>1</sup> Remote, not available with V3.

<sup>&</sup>lt;sup>1</sup> Available with DA01 only.

## L. EMERGENCY

**E0** Not required **E2** Emergency system - Remote

**M. CIRCUITS** 

**CS1** Single circuit **CS2** Dual circuit

## **TECHNICAL DATA**

### SHAPE "A"



Code	PULP1P01	PULP1P02	PULP1P03	PULP2P01	PULP2P02	PULP2P03	
Size	A1	A2	А3	A1	A2	А3	
<b>Light Direction</b>	Direct	Direct	Direct	Direct/Indirect	Direct/Indirect	Direct/Indirect	
Wattage	39W	61W	84W	80	123	168	
Delivered Ims	3200	5100	7000	6700	10300	14100	
LPW	83	83	83	84	84	84	
Suspension Points	3	3	4	3	3	4	

## SHAPE "B"



Code	PULP1P04	PULP1P05	PULP1P06	PULP2P04	PULP2P05	PULP2P06
Size	B1	B2	B3	B1	B2	B3
<b>Light Direction</b>	Direct	Direct	Direct	Direct/Indirect	Direct/indirect	Direct/Indirect
Wattage	36	58	80	68	113	160
Delivered Ims	3000	4800	6600	5700	9500	13400
LPW	83	83	83	84	84	84
Suspension Points	3	4	5	3	4	5

### SHAPE "C"



Code	PULP1P07	PULP1P08	PULP1P09	PULP2P07	PULP2P08	PULP2P09
Size	C1	C2	C3	C1	C2	C3
<b>Light Direction</b>	Direct	Direct	Direct	Direct/Indirect	Direct/Indirect	Direct/Indirect
Wattage	36	58	80	75	113	160
Delivered Ims	3000	4800	6600	6300	9500	13400
LPW	83	83	83	84	84	84
Suspension Points	3	4	5	3	4	5

## SHAPE "D"



Code	PULP1P10	PULP1P11	PULP1P12	PULP2P10	PULP2P11	PULP2P12
Size	D1	D2	D3	D1	D2	D3
<b>Light Direction</b>	Direct	Direct	Direct	Direct/Indirect	Direct/indirect	Direct/indirect
Wattage	39	61	84	80	123	168
Delivered Ims	3200	5000	7000	6700	10300	14100
LPW	83	83	83	84	84	84
Suspension Points	3	4	5	3	4	5
Suspension Points	3	4	5	3	4	5

## SHAPE "E"



Code	PULP1P13	PULP1P14	PULP1P15	PULP2P13	PULP2P14	PULP2P15
Size	E1	E2	E3	E1	E2	E3
<b>Light Direction</b>	Direct	Direct	Direct	Direct/Indirect	Direct/indirect	Direct/Indirect
Wattage	36	61	84	75	123	168
Delivered Ims	3000	5000	7000	6300	10300	14100
LPW	83	83	83	84	84	84
Suspension Points	3	4	5	3	4	5

## **FIXTURE FINISH**















White

Black Metallic -Textured

Silver Metallic -Textured

Gold Metallic -Textured

Midnight Blue Metallic -Textured

Copper Metallic

Charcoal Metallic -Textured

Bronze Metallic -Textured



Champagne Metallic



Red Metallic -Textured

## **CANOPY FINISH**



## **APPROVALS**


Champagne Metallic




Red Metallic -Textured

### **DIMENSIONAL DIAGRAMS**


A1, A2, A3

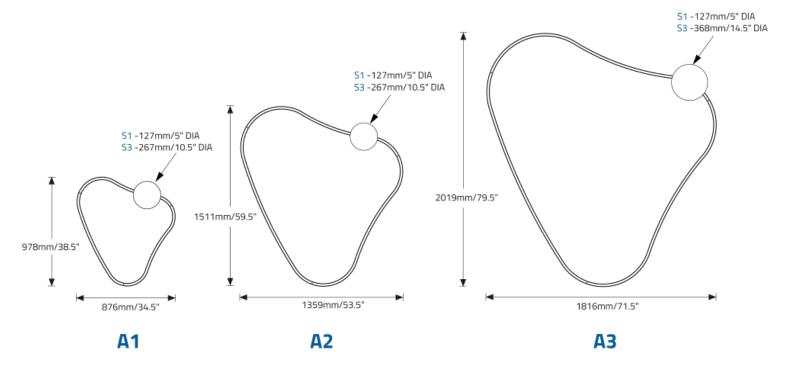


B1, B2, B3

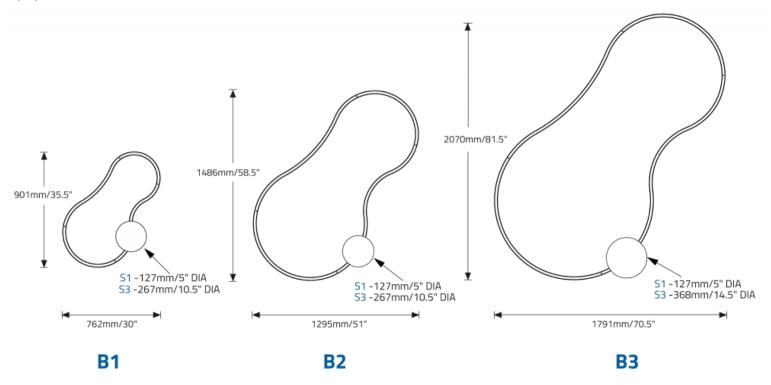


C1, C2, C3

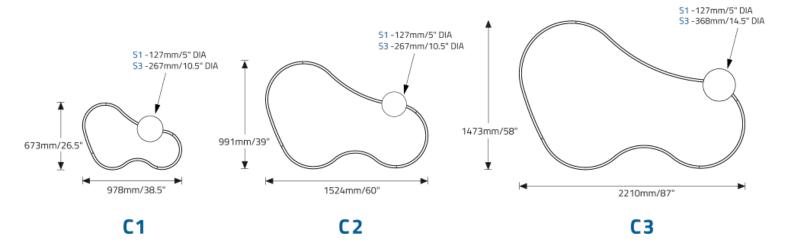


D1, D2, D3

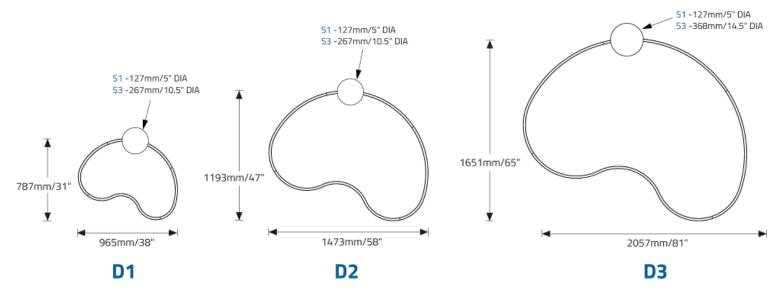

E1, E2, E3

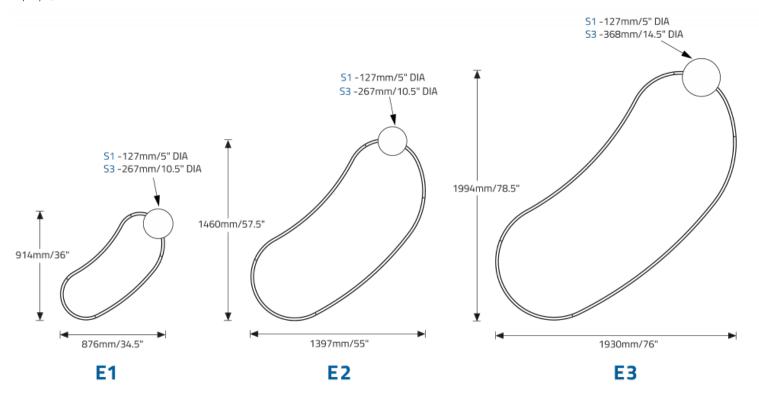

S1 - Remote Driver

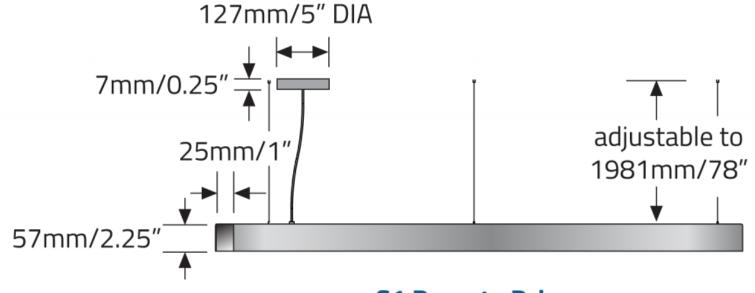

**S1 Remote Driver** 

S3 - Integral Driver

