






PUZZLE™


SHORT SPECIFICATION SHEET

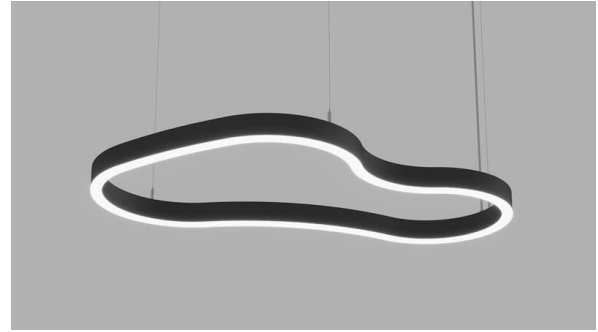

FIXTURE TYPE



FIXTURE CODE



QUANTITIES

1 HOW TO ORDER

1. Choose Shape and Size

Select from one of the following 5 shapes. Three sizes per Shape, consult dimensional diagrams for actual sizes.

SHAPE "A"



PULP1P01 A1, Direct, 3200 lms

PULP1P02 A2, Direct, 5100 lms


PULP1P03 A3, Direct, 7000 lms

PULP2P01 A1, Direct/Indirect,
6700 lms

PULP2P02 A2 Direct/Indirect,
10300 lms

PULP2P03 A3 Direct/Indirect,
14100 lms

SHAPE "B"



PULP1P04 B1 Direct, 3000 lms

PULP1P05 B2 Direct, 4800 lms


PULP1P06 B3 Direct, 6600 lms

PULP2P04 B1, Direct/Indirect,
5700 lms

PULP2P05 B2, Direct/Indirect,
9500 lms

PULP2P06 B3 Direct/Indirect,
13400 lms

SHAPE "C"



PULP1P07 C1 Direct, 3000 lms

PULP1P08 C2 Direct, 4800 lms

PULP1P09 C3 Direct, 6600 lms

PULP2P07 C1 Direct/Indirect,
6300 lms

PULP2P08 C2 Direct/Indirect,
9500 lms

PULP2P09 C3 Direct/Indirect,
13400 lms

SHAPE "D"



PULP1P10 D1 Direct, 3200 lms

PULP1P11 D2 Direct, 5000 lms

PULP1P12 D3 Direct, 7000 lms

PULP2P10 D1 Direct/Indirect,
6700 lms

PULP2P11 D2 Direct/Indirect,
10300 lms

PULP2P12 D3 Direct/Indirect,
14100 lms

SHAPE "E"



PULP1P13 E1 Direct, 3000 lms

PULP1P14 E2 Direct, 5000 lms

PULP1P15 E3 Direct, 7000 lms

PULP2P13 E1, Direct/Indirect,
6300 lms

PULP2P14 E2 Direct/Indirect,
10300 lms

PULP2P15 E3 Direct/Indirect,
14100 lms

2. LUMENS (DIRECT)

LPF017 175 lm/ft ¹

LPF026 265 lm/ft ²

LPF035 350 lm/ft ³

¹ Based of 50% of total output. ² Based on 75% of total output. ³ 100% of total output.

3. LUMEN (INDIRECT)

LPG000 Not required

LPG017 175 lm/ft ¹

LPG026 265 lm/ft ²

LPG035 350 lm/ft ³

¹ Based of 50% of total output. ² Based on 75% of total output. ³ 100% of total output.

4. CRI

CR80 CRI 80+ **CR90** CRI 90+

5. CCT (DIRECT)

CTA27 2700K **CTA30** 3000K **CTA35** 3500K **CTA40** 4000K

6. CCT (INDIRECT)

CTB00 Not required **CTB27** 2700K **CTB30** 3000K **CTB35** 3500K
CTB40 4000K

7. VOLTAGE

V1 120/277V **V2** 240V ¹ **V3** 347V ²

¹ Not available in North America. ² Available with DA01 only.

8. DIMMING

DA01 0–10V Dimming 1.0% **DA02** 0–10V Dimming 0.1% ¹ **DA20** DALI Dimming 0.1% ¹ **DA21** DALI Dimming 1.0% ¹

¹ Remote, not available with V3.

9. SUSPENSION

SS1 Vertical, Remote driver **SS3** Vertical, Driver Integral to Canopy ¹

¹ Available with DA01 only.

10. FINISH

FA01 White **FA02** Black Metallic – Textured **FA20** Silver Metallic – Textured **FA25** Gold Metallic – Textured
FA44 Midnight Blue Metallic – Textured **FA45** Copper Metallic **FA46** Charcoal Metallic – Textured **FA47** Bronze Metallic – Textured
FA52 Champagne Metallic

11. CANOPY FINISH

CF01 White **CF02** Black Metallic – Textured **CF20** Silver Metallic – Textured **CF25** Gold Metallic – Textured
CF44 Midnight Blue Metallic – Textured **CF45** Copper Metallic **CF46** Charcoal Metallic – Textured **CF47** Bronze Metallic – Textured
CF52 Champagne Metallic

12. EMERGENCY

E0 Not required

E2 Emergency system - Remote

13. CIRCUITS

CS1 Single circuit

CS2 Dual circuit