Project Name: Fixture Type:

Fixture Code: Quantities:





Buoyant and cheerful, **PUZZLE** is a collection of curvilinear surface lights consisting of 5 organic shapes each with 3 sizes. What these shapes are is an enigma left open to the individual's imagination and designed for creating remarkable combinations on the wall or ceiling that complement a variety of design themes.

#### **GENERAL SPECIFICATION**

#### Body and trim

Steel and aluminium.

#### Diffuser

Protruding Lens (2.1mm/0.08").

## **Remote Emergency**

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch (NA only) Maximum distance between wall/ceiling plate and luminaire is 4.5m/15′. Test switch fits a single gang box (not supplied).

#### **Drivers**

HPF electronic drivers for 120–277V (EU–240V), 0–10V, 1% dimming. Drivers are mounted remotely.

#### **Delivered Lumens**

Delivered lumens & LPW based on 4000K (min 80 CRI).

## Approvals

Damp Rated.

#### **OPTICS & FEATURES**









Direct

#### Finish

Powder coated.

#### Sensors

Consult factory regarding sensor compatibility.

### **Remote Mounting Of Drivers**

Wire Size 18 AWG - Max distance (from fixture to drivers) 40', Wire size 16 AWG - Max distance 60', Wire size 14 AWG - Max distance 90. Drivers must be accessible after installation.

#### Mechanical

Luminaires mount directly over J box (by others - North America only).

## Reported L70 @25°C (77°F)

> 50,000 hrs.

#### Patent No.

D827909, D827187, D827908, D828611, D827907.

## **HOW TO ORDER**

#### A. CHOOSE A SHAPE AND SIZE

Select from one of the following 5 shapes. Three sizes per Shape, consult dimensional diagrams for actual sizes

## SHAPE "A"



**PULC1C01** A1, 3200 lms

**PULC1C02** A2, 5100 lms

**PULC1C03** A3, 7000 lms

## SHAPE "B"



**PULC1C04** B1, 3000 lms

**PULC1C05** B2, 4800 lms

PULC1C06 B3, 6600 lms

## SHAPE "C"



**PULC1C07** C1, 3000 lms

**PULC1C08** C2, 4800 lms

**PULC1C09** C3, 6600 lms

## SHAPE "D"



**PULC1C10** D1, 3200 lms

**PULC1C11** D2, 5000 lms

**PULC1C12** D3, 7000 lms

### SHAPE "E"



**PULC1C13** E1, 3000 lms

**PULC1C14** E2, 5000 lms

**PULC1C15** E3, 7000 lms

#### **B. LUMENS**

**LPF017** 175 lm/ft <sup>1</sup>

LPF026 265 lm/ft 2

LPF035 350 lm/ft 3

#### C. CRI

CR80 CRI 80+

**CR90** CRI 90+

## D. CCT

**CTA27** 2700K

**CTA30** 3000K

**CTA35** 3500K

**CTA40** 4000K

<sup>&</sup>lt;sup>1</sup> Based of 50% of total output.

<sup>&</sup>lt;sup>2</sup> Based on 75% of total output.

 $<sup>^{\</sup>scriptsize 3}$  100% of total output.

### **E. VOLTAGE**

**V1** 120/277V **V2** 240V <sup>1</sup> **V3** 347V <sup>2</sup>

## **DIMMING**

**DA01** 0-10V Dimming 1.0% **DA02** 0-10V Dimming 0.1% **DA20** DALI Dimming 0.1% **DA21** DALI Dimming 1.0% **DA21** DALI Dimming 1.0%

#### F. FINISH

FA01 WhiteFA02 Black Metallic - TexturedFA20 Silver MetallicFA25 Gold Metallic - TexturedFA44 Midnight Blue Metallic - TexturedFA45 Copper MetallicFA46 Charcoal Metallic - TexturedFA47 Bronze Metallic - Textured

**FA52** Champagne Metallic **FA53** Red Metallic - Textured

### **G. EMERGENCY**

**EO** Not required **E2** Emergency system - Remote

<sup>&</sup>lt;sup>1</sup> Not available in North America.

<sup>&</sup>lt;sup>2</sup> Available with DA01 only.

<sup>&</sup>lt;sup>1</sup> Remote only, not available with V3.

## **TECHNICAL DATA**

## SHAPE "A"



Code	PULC1C01	PULC1C02	PULC1C03
Size	A1	A2	А3
Wattage	39W	62W	83W
Light Direction	Direct	Direct	Direct
Delivered Ims	3200	5100	7000
LPW	83	83	83

## SHAPE "B"



Code	PULC1C04	PULC1C05	PULC1C06
Size	B1	B2	В3
<b>Light Direction</b>	Direct	Direct	Direct
Wattage	34	57	79
Delivered Ims	3000	4800	6600
LPW	83	83	83

## SHAPE "C"



Code	PULC1C07	PULC1C08	PULC1C09
Size	C1	C2	C3
Light Direction	Direct	Direct	Direct
Wattage	36	59	81
Delivered Ims	3000	4800	6600
LPW	83	83	83

## SHAPE "D"



Code	PULC1C10	PULC1C11	PULC1C12
Size	D1	D2	D3
<b>Light Direction</b>	Direct	Direct	Direct
Wattage	39	61	85
Delivered Ims	3200	5000	7000
LPW	83	83	83

### SHAPE "E"



Code	PULC1C13	PULC1C14	PULC1C15
Size	E1	E2	E3
Light Direction	Direct	Direct	Direct
Wattage	36	61	83
Delivered Ims	3000	5000	7000
LPW	83	83	83

#### **FINISH**



White

Black Metallic -

Textured



Silver Metallic



Textured



Textured



Copper Metallic



Textured



Textured



Champagne Metallic

Red Metallic -Textured

## **APPROVALS**













## **DIMENSIONAL DIAGRAMS**


A1, A2, A3

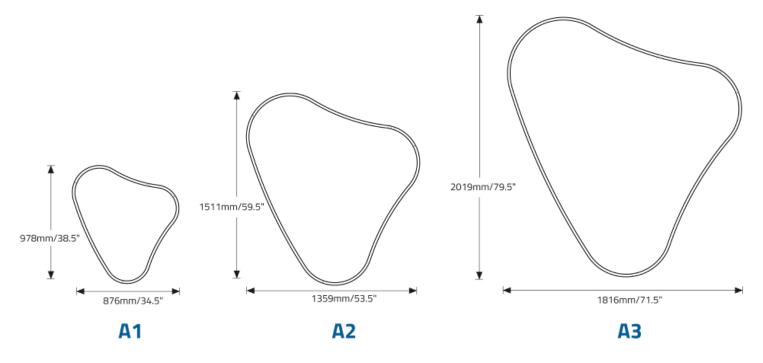

B1, B2, B3

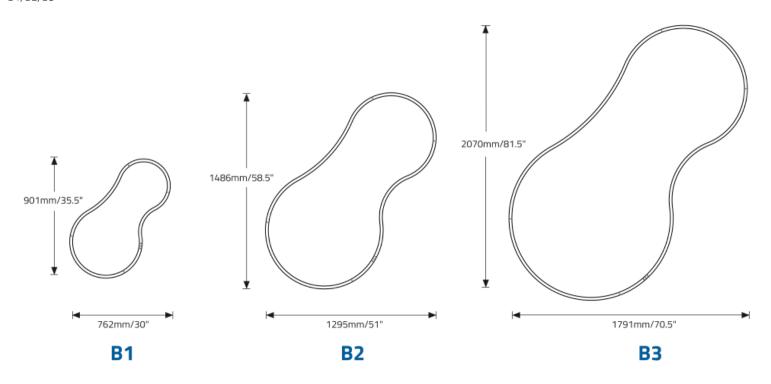

C1, C2, C3

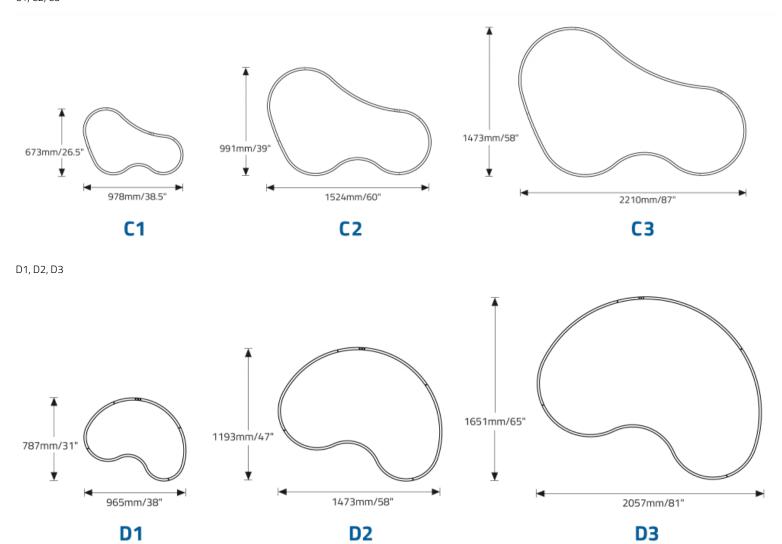

E1, E2, E3

