

RAIL-LITE™ - TRIMLESS (NON-CONTINUOUS)



Project Name:

Fixture Type:

Fixture Code:

Quantities:

A. LUMINAIRE

522112 12" - 1 LED Head

522118 18" - 1 or 2 LED Heads

522124 24" - 2 or 3 LED Heads

522136 36" - 2 to 4 LED Heads

522148 48" - 2 to 5 LED Heads

522160 60" - 2 to 5 LED Heads

522172 72" - 2 to 6 LED Heads

522196 96" - 2 to 7 LED Heads

522144 144" - 4 to 10 LED Heads

B. NUMBER OF HEADS

H01 1 LED Head

H02 2 LED Heads

H03 3 LED Heads

H04 4 LED Heads

H05 5 LED Heads

H06 6 LED Heads

H07 7 LED Heads

H08 8 LED Heads

H09 9 LED Heads

H10 10 LED Heads

C. LED

B27A Bridgelux V18, 2700K, 80 CRI, 3069 lms

B27B Bridgelux V18, 2700K, 90 CRI, 2397 lms

B30A Bridgelux V18, 3000K, 80 CRI, 3218 lms

B30B Bridgelux V18, 3000K, 90 CRI, 2498 lms

B35A Bridgelux V18, 3500K, 80 CRI, 3313 lms

B40A Bridgelux V18, 4000K, 80 CRI, 3333 lms

B40B Bridgelux V18, 4000K, 90 CRI, 2840 lms

X27A Xicato Standard, 2700K, 83 CRI, 2262 lms

X30A Xicato Standard, 3000K, 83 CRI, 2262 lms

X35A Xicato Standard, 3500K, 83 CRI, 2262 lms

X40A Xicato Standard, 4000K, 83 CRI, 2262 lms

X30B Xicato Vibrant V80, 3000K, 83 CRI, 2262 lms

X27C Xicato Artist, 2700K, 98 CRI, 2262 lms

X30C Xicato Artist, 3000K, 98 CRI, 2262 lms

X35C Xicato Artist, 3500K, 98 CRI, 2262 lms

X40C Xicato Artist, 4000K, 98 CRI, 2262 lms

X30D Xicato Vibrant V95, 3000K, 98 CRI, 2262 lms

D. APERTURE

5W Narrow

6W Medium

9W Wide

E. BRIDGELUX REFLECTORS

529001 Narrow Beam 14° (5" dia)

529002 Medium Beam 22° (5" dia)

529003 Medium Beam 38° (3" dia)

529004 Narrow Beam 28° (3" dia)

529005 Wide Beam 47° (3" dia)

F. XICATO REFLECTORS

529011 Narrow Beam 13° (125mm/5" dia)

529012 Wide Beam 41° (125mm/5" dia)

529013 Narrow Beam 18° (75mm/3" dia)

529014 Medium Beam 28° (75mm/3" dia)

G. DIMMING OPTIONS

D1 0-10V Dimming (1%)

D2 0-10V Dimming (0.1%)

DA DALI Dimming (0.1%)

DL DALI Dimming (1%)

L1 Lutron L3DA3W Hi-Lume 1% 3 Wire

L2 Lutron LDE1 Hi-Lume 1% H EcoSystem

DE PoE

DE must be used with EV only.

H. OPTIONAL LOW VOLTAGE

EV Low Voltage


To be used with DE only.



RAIL-LITE™ - TRIMLESS (NON-CONTINUOUS)


DIMENSIONAL DIAGRAMS

Narrow Aperture

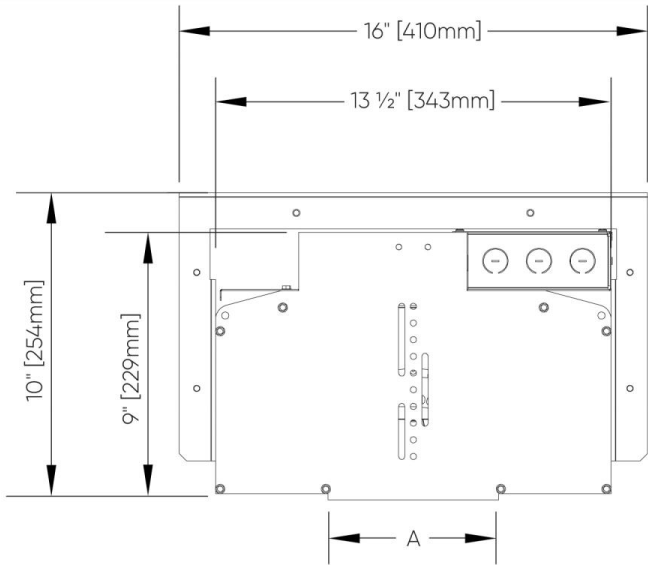


5W

Medium Aperture

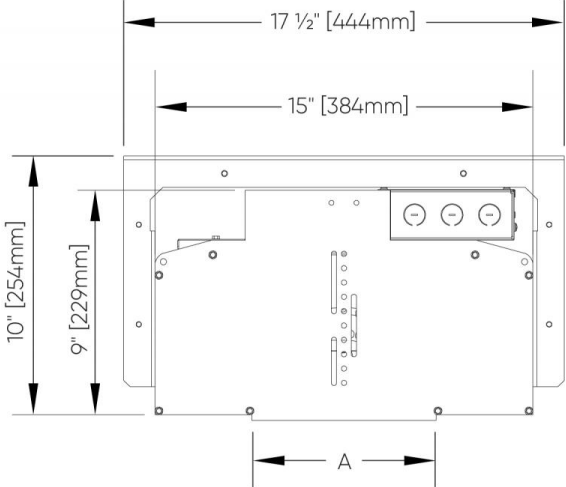

6W

Wide Aperture

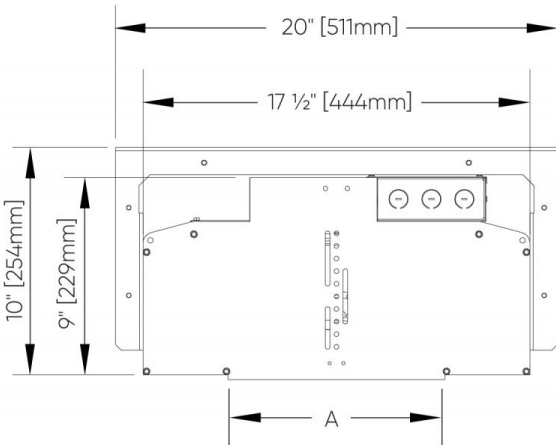

9W