

RAZER CUBE™ - WALL SURFACE EXTERIOR

Project Name:



Fixture Type:

Fixture Code:

Quantities:



RAZER CUBE™ - WALL SURFACE EXTERIOR

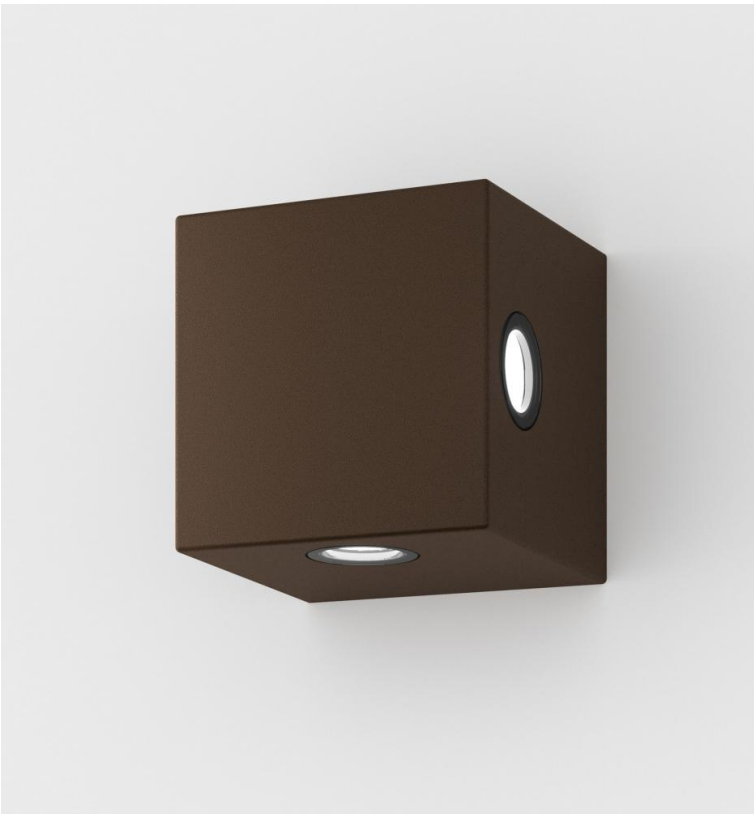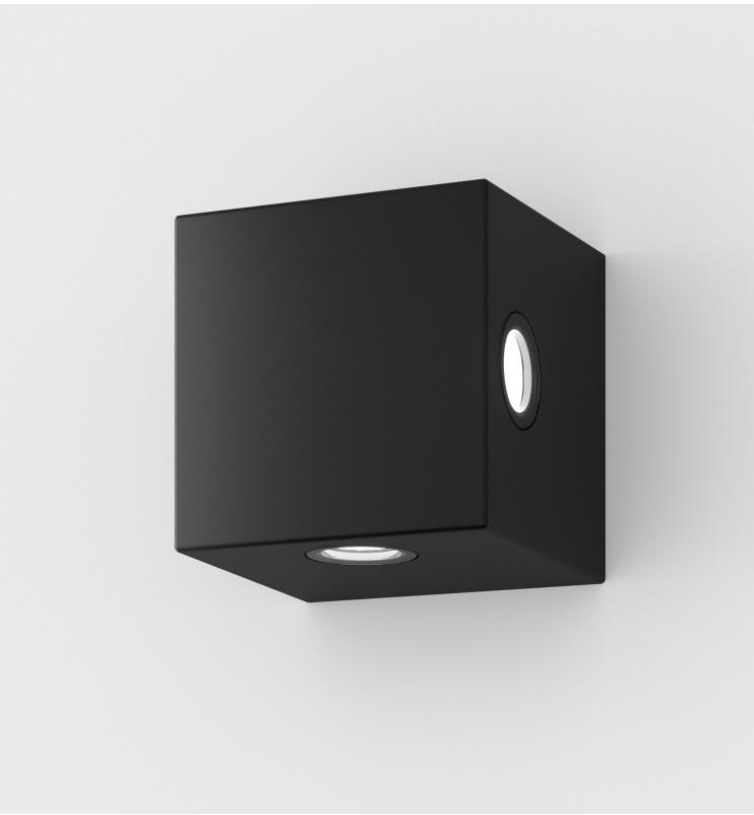

RAZER CUBE™ - WALL SURFACE EXTERIOR

RAZER CUBE is an exterior light designed to be compact and minimalist in style while illuminating building architecture for both practical and design functions. Available in multiple light emission options of 1, 2, or 4 beams, with beam angles consisting of a super spot or a super flood, RAZER can be used to create wall effects such as a light grid or to enhance textured facades.

GENERAL SPECIFICATION

Body and trim

Die-cast aluminum.

Finish

Powder coated.

Lens

Tempered safety glass.

Ambient temperature operating range

-22°F (-30°C) to 104°F (40°C). -40°F (-40°C) possible for certain configurations, consult factory.

Mechanical

Mounts directly over a J-box (by others - North America only).

Drivers

Integral, HPF electronic for 120-277V, (EU-240V).

External screws

304 stainless steel.


Delivered Lumens

Delivered lumens & LPW based on 4000K (min 80 CRI).

Dark Sky Friendly

Dark Sky Friendly if ordered with 3000K CCT and below. Direct only.

MOUNTING & OPTICS

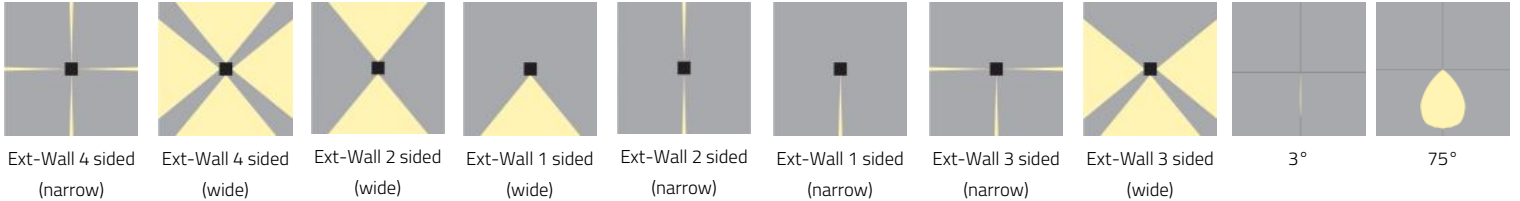

Dark Sky Friendly

RAZER CUBE™ - WALL SURFACE EXTERIOR

HOW TO ORDER

A. LUMINAIRE

RARC1W01 1 Sided

RARC1W02 2 Sided

RARC1W03 3 Sided

RARC1W04 4 Sided

B. BEAM ANGLE (DOWNLIGHT)

BA03 3°

BA75 75°

C. BEAM ANGLE (UPLIGHT)

BB00 Not required

BB03 3°

BB75 75°

D. BEAM ANGLE (LEFT)

BC00 Not required

BC03 3°

BC75 75°

E. BEAM ANGLE (RIGHT)

BD00 Not required

BD03 3°

BD75 75°

F. CRI

CR80 CRI 80+

G. CCT

CTA27 2700K

CTA30 3000K

CTA35 3500K

CTA40 4000K

H. VOLTAGE

V1 120/277V

V2 240V¹

¹ Not available in North America.

I. DIMMING

DA06 0-10V Dimming¹

¹ Dimming is equal to or less than 10%.

J. FINISH

FA01 White

FA02 Black Metallic - Textured

FA20 Silver Metallic - Textured

FA27 Wood grain - Light Cherry¹

FA28 Wood grain - Dark Walnut¹

FA44 Midnight Blue Metallic - Textured

FA46 Charcoal Metallic - Textured

FA47 Bronze Metallic - Textured

FA53 Red Metallic - Textured

¹ Longer than normal lead times may apply, consult factory.

Note: Wood grain pattern will vary per fixture.



RAZER CUBE™ - WALL SURFACE EXTERIOR

TECHNICAL DATA

LUMINAIRE

| | | | | |
|------------------------|-----------------|-----------------|-----------------|-----------------|
| Code | RARC1W01 | RARC1W02 | RARC1W03 | RARC1W04 |
| Light Direction | 1 Sided | 2 Sided | | 4 Sided |

BEAM ANGLE (DOWN)

| | | |
|----------------------|-------------|-------------|
| Code | BA03 | BA75 |
| Beam | 3° | 75° |
| Wattage | 2W | 5W |
| Delivered lms | 41 | 345 |

BEAM ANGLE (UPLIGHT)

| | | | |
|----------------------|--------------|-------------|-------------|
| Code | BB00 | BB03 | BB75 |
| Beam | Not required | 3° | 75° |
| Wattage | | 2W | 5W |
| Delivered lms | | 41 | 345 |

BEAM ANGLE (LEFT)

| | | | |
|----------------------|--------------|-------------|-------------|
| Code | BC00 | BC03 | BC75 |
| Beam | Not required | 3° | 75° |
| Wattage | | 2W | 5W |
| Delivered lms | | 41 | 345 |

BEAM ANGLE (RIGHT)


| | | | |
|----------------------|--------------|-------------|-------------|
| Code | BD00 | BD03 | BD75 |
| Beam | Not required | 3° | 75° |
| Wattage | | 2W | 5W |
| Delivered lms | | 41 | 345 |

RAZER CUBE™ - WALL SURFACE EXTERIOR


FINISH




White



Black Metallic -
Textured



Silver Metallic -
Textured




Wood grain - Light
Cherry¹



Wood grain - Dark
Walnut¹



Midnight Blue Metallic -
Textured



Charcoal Metallic -
Textured



Bronze Metallic -
Textured



Red Metallic -
Textured

¹ Longer than normal lead times may apply, consult factory.
Note: Wood grain pattern will vary per fixture.

APPROVALS



RAZER CUBE™ - WALL SURFACE EXTERIOR

DIMENSIONAL DIAGRAMS

