





RAZER SQ™


FULL SPECIFICATION SHEET



Fixture Type



Fixture Code




Quantities

1 DESCRIPTION

RAZER SQ is an exterior light designed to be compact and minimalist in style while illuminating building architecture for both practical and design functions. Available with 1 or 2 light emission options with beam angles consisting of a super spot to deliver a sharp slit of light or a super flood for more ambient illumination or to enhance textured facades. **RAZER SQ** can be mounted to an electrical switch box to maintain its sleek appearance. This luminaire can be customized with 10 distinct finishes that will add a touch of class to your spaces.

2 OPTICS & FEATURES

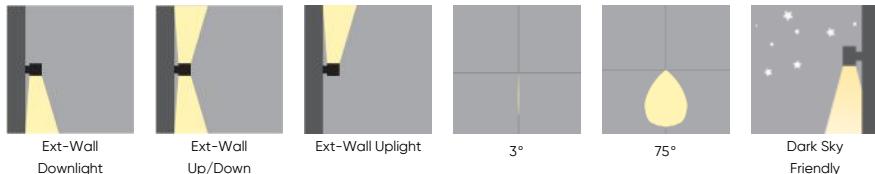

3 APPROVALS



4 GENERAL SPECIFICATION

BODY AND TRIM

Die-cast aluminum.

FINISH

Powder coated.

LENS

Tempered safety glass.

MECHANICAL

Mounts directly over a 2" x 3" electrical junction box (by others - North America only).

DRIVERS

Integral, HPF electronic for 120-277V, (EU-240V).

DELIVERED LUMENS

Delivered lumens & LPW based on 4000K (min 80 CRI).

AMBIENT TEMPERATURE OPERATING RANGE

-22°F (-30°C) to 104°F (40°C).

MOUNTING


When mounting, the fixture can be oriented in any direction.

EXTERNAL SCREWS

304 stainless steel.

DARK SKY FRIENDLY

Dark Sky Friendly if ordered with 3000K CCT and below. Direct only.

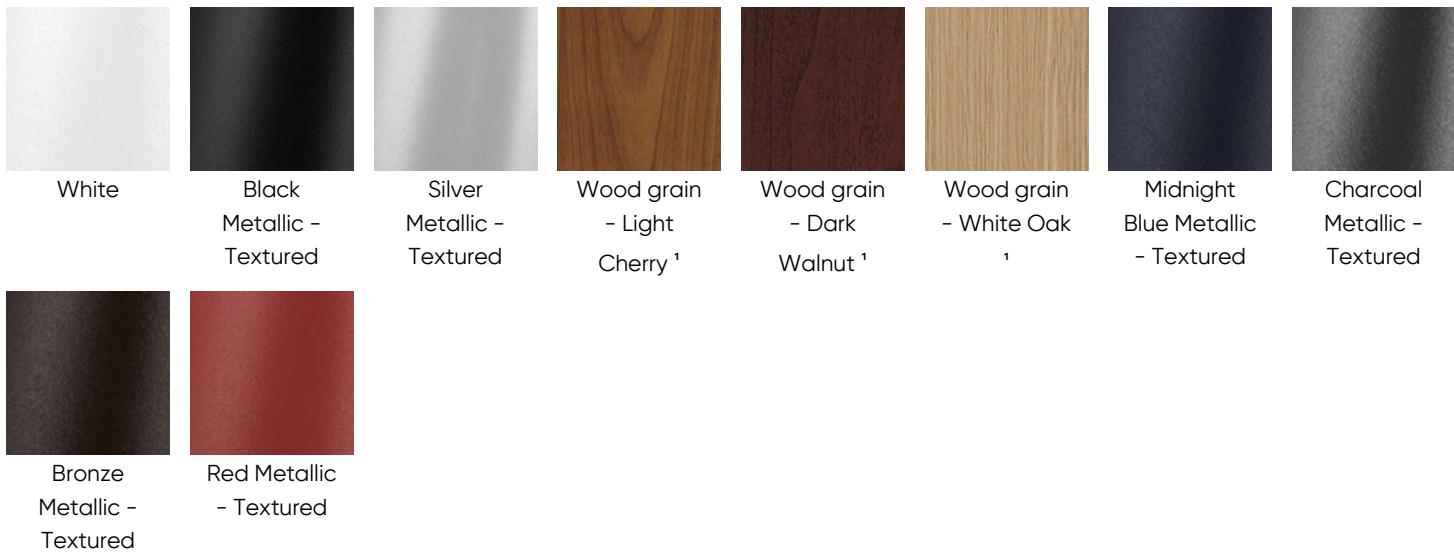5 DESIGN OPTIONS**FINISH**

¹ Wood grain finishes may incur longer lead times and setup charges. Consult factory for details.

6 HOW TO ORDER**1. LUMINAIRE**

RARQ1W01 One Direction

RARQ2W01 Two Direction

Stainless steel screw on Direction A.

2. BEAM ANGLE (DIRECTION ONE/DOWNLIGHT)**BA00** Not required **BA03** 3° **BA75** 75°**3. BEAM ANGLE (DIRECTION TWO/UPLIGHT)****BB00** Not required **BB03** 3° **BB75** 75°**4. CRI****CR80** CRI 80+**5. CCT****CTA27** 2700K **CTA30** 3000K **CTA35** 3500K **CTA40** 4000K**6. VOLTAGE****V1** 120/277V **V2** 240V ¹¹ Not available in North America.**7. DIMMING****DA00** Not required ¹ **DA06** 0-10V Dimming ²¹ Dimming not available for direct only version using 3° narrow beam. ² Dimming is equal to or less than 10%.**8. FINISH**

FA01 White	FA02 Black Metallic - Textured	FA20 Silver Metallic - Textured	FA27 Wood grain - Light Cherry ¹
FA28 Wood grain - Dark Walnut ¹	FA30 Wood grain - White Oak ¹	FA44 Midnight Blue Metallic - Textured	FA46 Charcoal Metallic - Textured
FA47 Bronze Metallic - Textured	FA53 Red Metallic - Textured		

¹ Wood grain finishes may incur longer lead times and setup charges. Consult factory for details.**7 TECHNICAL DATA****LUMINAIRE**

Stainless steel screw on Direction A.

Code	RARQ1W01	RARQ2W01
Light Direction	One Direction	Two Direction

BEAM (DIRECTION ONE)

Code	BA00	BA03	BA75
Beam	Not required	3°	75°
Wattage		3W	7W
Delivered lms		59	482

BEAM (DIRECTION TWO)

Code	BB00	BB03	BB75
Beam	Not required	3°	75°
Wattage		3W	7W
Delivered lms		59	482

8 DIMENSIONAL DIAGRAMS

