

RING BLADE™

Project Name:	Fixture Type:
Fixture Code:	Quantities:

A. LUMINAIRE TYPE

RBDP PendantRBDC Ceiling

B. DIAMETER

SL03 3ft, 9700 lmsSL04 4ft, 13000 lmsSL05 5ft, 16400 lmsSL06 6ft, 19400 lms

C. DISTRIBUTION

DR1 Direct 100%DR2 Direct 54% / Indirect 46%

D. LM/FT

LPF040 400 lm/ft¹LPF060 600 lm/ft^{1 2 3}LPF080 800 lm/ft^{1 2 4}LPF100 1000 lm/ft^{2 5}

¹ Available with DR1 (Direct only)
² Available with DR2 (Direct/Indirect)
³ Based on 60% of total output (for DR2)
⁴ Based on 80% of total output (for DR2)
⁵ 100% of total output (for DR2)

E. CRI

CR90 CRI 90+

F. CCT

CTA27 2700KCTA30 3000KCTA35 3500KCTA40 4000K

G. VOLTAGE

V1 120/277VV2 240V¹V3 347V²V4 Low Voltage³

¹ V2 not available in North America.
² V3 available with DA01 dimming only.
³ V4 available with DA45 dimming only.

H. DIMMING (REMOTE)

DA01 0-10V Dimming 1.0%DA02 0-10V Dimming 0.1%¹DA20 DALI Dimming 0.1%¹DA21 DALI Dimming 1.0%¹
DA30 DSI/switchDim^{1 2}DA45 PoE³

¹ Not available with V3 or V4.
² DA30 not available in North America
³ DA45 used V4 only.

I. SUSPENSION

SS0 Not requiredSS6 POS, Vertical, Remote driverSS7 POS, Hub, Remote driver¹SS9 POS, Hub, Driver Integral to Canopy^{1 2}

¹ Available with V1 (120V) only. The minimum suspension height relative to diameter is as follows: 3ft = 18", 4ft = 24", 5ft = 30", 6ft = 36".
² Available with V1 (120V) only.

RING BLADE™

J. FIXTURE FINISH

FA01 White	FA02 Black Metallic - Textured	FA20 Silver Metallic - Textured	FA25 Gold Metallic - Textured
FA44 Midnight Blue Metallic - Textured	FA45 Copper Metallic	FA46 Charcoal Metallic - Textured	FA47 Bronze Metallic - Textured
FA52 Champagne Metallic	FA53 Red Metallic - Textured		

K. CANOPY FINISH

CF00 Not required	CF01 White	CF02 Black Metallic - Textured	CF20 Silver Metallic - Textured
CF25 Gold Metallic - Textured	CF44 Midnight Blue Metallic - Textured	CF45 Copper Metallic	CF46 Charcoal Metallic - Textured
CF47 Bronze Metallic - Textured	CF52 Champagne Metallic	CF53 Red Metallic - Textured	

L. ACOUSTIC PANEL COLOR

AP00 Not required	AP02 Citrus	AP04 White	AP08 Red Coffee
AP11 Light Gray	AP13 Apple Green	AP22 Blue	AP26 Sesame Gray
AP27 Black	AP47 Navy Peony	AP60 Pure Red	AP73 Cloudburst
AP89 Douglas Fir	APW01 Oak		

Acoustic panels 60" and larger will include a visible seam.
For accompanying non-illuminating acoustic panels, see our Acoustic Circles, Quads, Triangles, and Ellipse spec pages.
Other finishes available. Contact factory.

M. EMERGENCY

E0 Not required	E2 Emergency system - Remote ¹
------------------------	--



¹ Not available in Integral or with 347V. Consult factory.

DIMENSIONAL DIAGRAMS

DISTANCE TO CEILING SURFACE MOUNT




CROSS SECTION

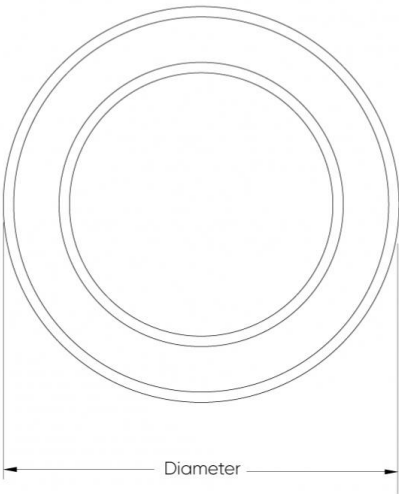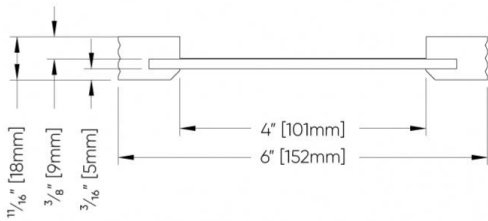


Diameter	Minimum Suspension Height
3ft [914mm]	15" [381mm]
4ft [1219mm]	20" [508mm]
5ft [1524mm]	25" [635mm]
6ft [1828mm]	35" [889mm]
7ft [2133mm]	40" [1016mm]


Distance to ceiling
Hub Mount

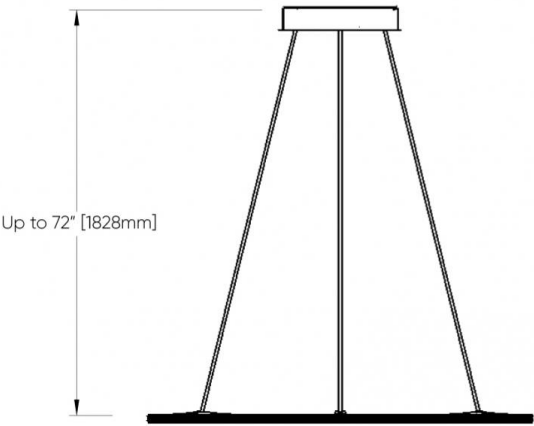


Distance to ceiling
Vertical Mount

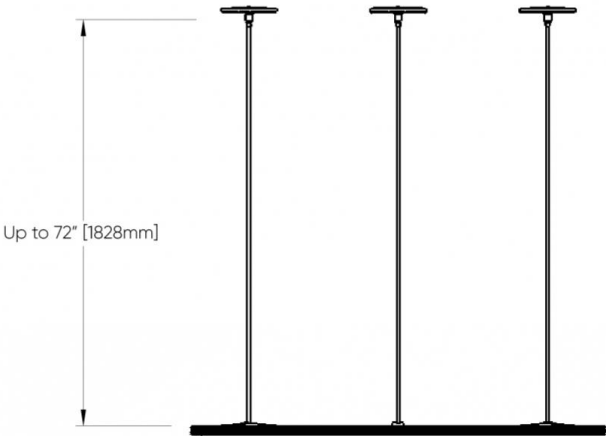

Hub Remote POS (SS7)

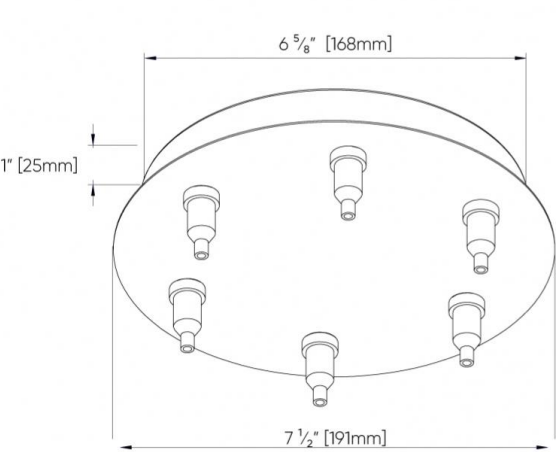

Hub Integral POS (SS9)

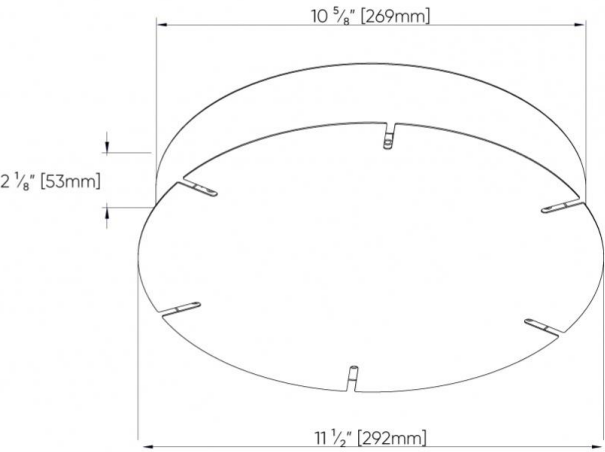

Vertical Remote POS (SS6)

