

# RING BLADE™

Project Name:

Fixture Type:

Fixture Code:

Quantities:

## A. LUMINAIRE TYPE

**RBDP** Pendant

**RBDC** Ceiling

## B. DIAMETER

**SL03** 3ft, 9000 lms

**SL04** 4ft, 12000 lms

**SL05** 5ft, 16400 lms

**SL06** 6ft, 19400 lms

## C. DISTRIBUTION

**DRO** Direct 100%

**DR2** Direct 50% / Indirect 50%

## D. LM/FT

**LPF040** 400 lm/ft<sup>1</sup>

**LPF060** 600 lm/ft<sup>1 2</sup>

**LPF080** 800 lm/ft<sup>1 2</sup>

**LPF100** 1000 lm/ft<sup>2</sup>

<sup>1</sup> 100% Direct light

<sup>2</sup> 54 Direct light/46% Indirect light

## E. CRI

**CR90** CRI 90+

## F. CCT

**CTA27** 2700K<sup>1</sup>

**CTA30** 3000K

**CTA35** 3500K

**CTA40** 4000K

<sup>1</sup> Longer than normal lead times may apply, consult factory.

## G. VOLTAGE

**V1** 120/277V

**V2** 240V<sup>1</sup>

**V3** 347V<sup>2</sup>

**V4** Low Voltage<sup>3</sup>

<sup>1</sup> V2 not available in North America.

<sup>2</sup> V3 available with DA01 dimming only.

<sup>3</sup> V4 available with DA45 dimming only.

## H. DIMMING (REMOTE)

**DA01** 0-10V Dimming 1.0%

**DA02** 0-10V Dimming 0.1%<sup>1</sup>

**DA20** DALI Dimming 0.1%<sup>1</sup>

**DA21** DALI Dimming 1.0%<sup>1</sup>

**DA30** DSI/switchDim<sup>1 2</sup>

**DA45** PoE<sup>3</sup>

<sup>1</sup> Not available with V3 or V4.

<sup>2</sup> DA30 not available in North America

<sup>3</sup> DA45 used V4 only.

## I. SUSPENSION

**SS0** Not required

**SS6** POS, Vertical, Remote driver

**SS7** POS, Hub, Remote driver<sup>1</sup>

**SS9** POS, Hub, Driver Integral to Canopy<sup>1 2</sup>

<sup>1</sup> Available with V1 (120V) only. The minimum suspension height relative to diameter is as follows: 3ft = 18", 4ft = 24", 5ft = 30", 6ft = 36".

<sup>2</sup> Available with V1 (120V) only.



# RING BLADE™

## J. FIXTURE FINISH

<b>FA01</b> White	<b>FA02</b> Black Metallic - Textured	<b>FA20</b> Silver Metallic - Textured	<b>FA25</b> Gold Metallic - Textured
<b>FA44</b> Midnight Blue Metallic - Textured	<b>FA45</b> Copper Metallic	<b>FA46</b> Charcoal Metallic - Textured	<b>FA47</b> Bronze Metallic - Textured
<b>FA52</b> Champagne Metallic	<b>FA53</b> Red Metallic - Textured		

## K. CANOPY FINISH

<b>CF00</b> Not required	<b>CF01</b> White	<b>CF02</b> Black Metallic - Textured	<b>CF20</b> Silver Metallic - Textured
<b>CF25</b> Gold Metallic - Textured	<b>CF44</b> Midnight Blue Metallic - Textured	<b>CF45</b> Copper Metallic	<b>CF46</b> Charcoal Metallic - Textured
<b>CF47</b> Bronze Metallic - Textured	<b>CF52</b> Champagne Metallic	<b>CF53</b> Red Metallic - Textured	

## L. ACOUSTIC PANEL COLOR

<b>AP00</b> Not required	<b>AP04</b> White	<b>AP13</b> Apple Green	<b>AP22</b> Blue
<b>AP11</b> Light Gray	<b>AP26</b> Sesame Gray	<b>AP27</b> Black	

---

Available up to 5ft diameter. Larger sizes available with visible seams, consult factory.  
For accompanying non-illuminating acoustic panels see our Acoustic Circles, Quads, Triangles and Ellipse spec pages.  
Other finishes available. Consult factory.

## M. EMERGENCY

<b>E0</b> Not required	<b>E2</b> Emergency system - Remote <sup>1</sup>
------------------------	--

---



<sup>1</sup> Not available in Integral or with 347V. Consult factory.

## DIMENSIONAL DIAGRAMS

DISTANCE TO CEILING SURFACE MOUNT




CROSS SECTION

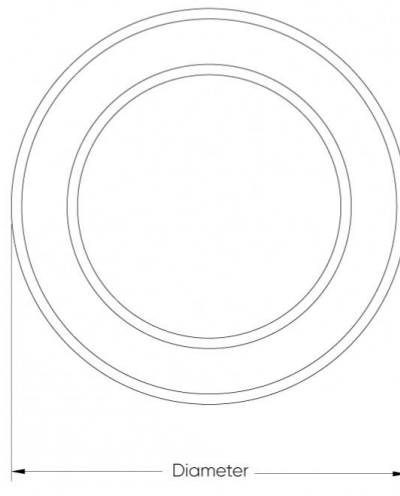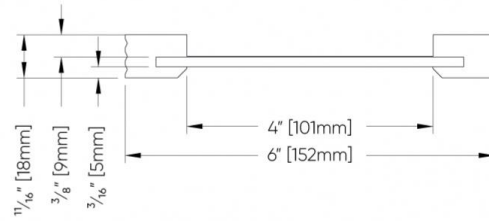


Diameter	Minimum Suspension Height
3ft [914mm]	15" [381mm]
4ft [1219mm]	20" [508mm]
5ft [1524mm]	25" [635mm]
6ft [1828mm]	35" [889mm]
7ft [2133mm]	40" [1016mm]


Distance to ceiling  
Hub Mount

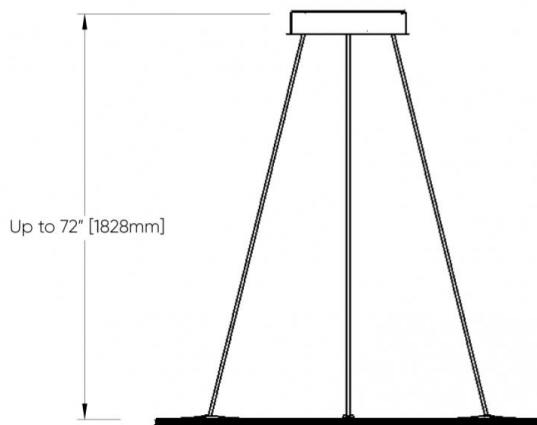


Distance to ceiling  
Vertical Mount

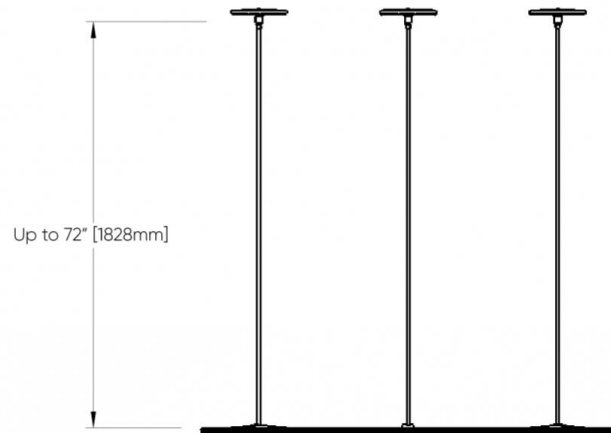

Hub Remote POS (SS7)

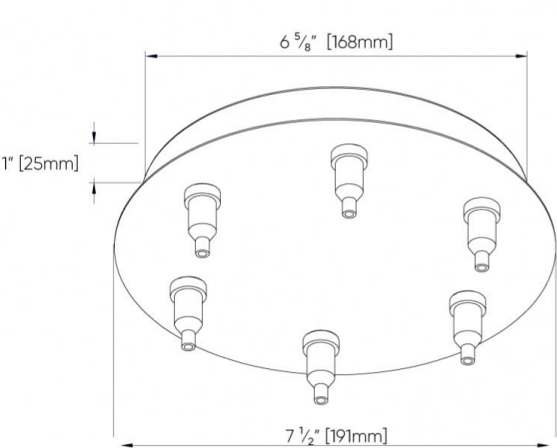

Hub Integral POS (SS9)

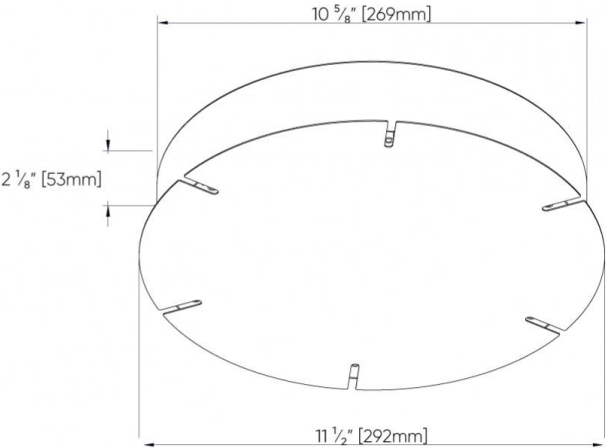

Vertical Remote POS (SS6)

