
# RING BLADE™

## SHORT SPECIFICATION SHEET

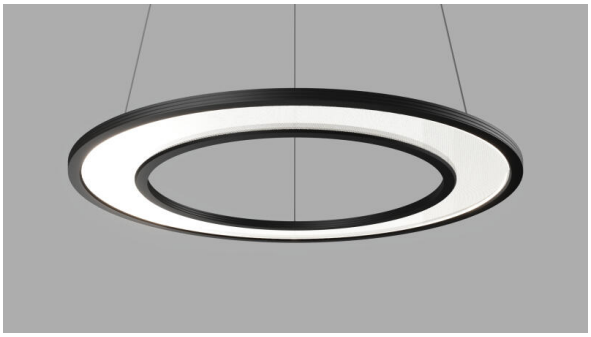

**FIXTURE TYPE**

**FIXTURE CODE**

**QUANTITIES**

## 1 HOW TO ORDER

### LUMINAIRE TYPE

**RBDP** Pendant

### DIAMETER

**SL03** 3ft, 9700 lms
**SL04** 4ft, 13000 lms
**SL05** 5ft, 16400 lms
**SL06** 6ft, 19700 lms

### DISTRIBUTION

**DR1** Direct 100%
**DR2** Direct 54% / Indirect 46%

Single circuit only. Dual circuit not supported.

### LM/FT

**LPF040** 400 lm/ft [1]
**LPF060** 600 lm/ft [1 2 3]
**LPF080** 800 lm/ft [1 2 4]
**LPF100** 1000 lm/ft [2 5]

[1] Available with DR1 (Direct only). [2] Available with DR2 (Direct/Indirect). [3] Based on 60% of total output (for DR2).
[4]Based on 80% of total output (for DR2). [5] 100% of total output (for DR2).

### CRI

**CR90** CRI 90+

### CCT

**CTA27** 2700K
**CTA30** 3000K
**CTA35** 3500K
**CTA40** 4000K

### VOLTAGE

**V1** 120/277V
**V2** 240V [1]
**V3** 347V [2]
**V4** Low Voltage [3]

[1] V2 not available in North America. [2] V3 available with DA01 dimming only. [3] V4 available with DA45 dimming only.

### DIMMING (REMOTE)

**DA01** 0-10V Dimming 1.0%
**DA02** 0-10V Dimming 0.1% [1]
**DA20** DALI Dimming 0.1% [1]
**DA21** DALI Dimming 1.0% [1]
**DA30** DSI/switchDim [1 2]
**DA45** PoE [3]

[1] Not available with V3 or V4. [2] DA30 not available in North America. [3] DA45 used V4 only.


© 2026 Beta-Calco Inc. Specifications are subject to change without notice

## SUSPENSION

**SS0** Not required

**SS6** POS, Vertical, Remote driver

**SS7** POS, Hub, Remote driver [1]

**SS9** POS, Hub, Driver Integral to Canopy [1] [2]

[1] Available with V1 (120V) only.The minimum suspension height relative to diameter is as follows: 3' = 18", 4' = 24", 5' = 30", 6' = 36".

[2] Available with V1 (120V) only.

## FIXTURE FINISH

**FA01** White

**FA02** Black Metallic - Textured

**FA20** Silver Metallic - Textured

**FA25** Gold Metallic - Textured

**FA44** Midnight Blue Metallic - Textured

**FA45** Copper Metallic

**FA46** Charcoal Metallic - Textured

**FA47** Bronze Metallic - Textured

**FA52** Champagne Metallic

**FA53** Red Metallic - Textured

## CANOPY FINISH

**CF00** Not required

**CF01** White

**CF02** Black Metallic - Textured

**CF20** Silver Metallic - Textured

**CF25** Gold Metallic - Textured

**CF44** Midnight Blue Metallic - Textured

**CF45** Copper Metallic

**CF46** Charcoal Metallic - Textured

**CF47** Bronze Metallic - Textured

**CF52** Champagne Metallic

**CF53** Red Metallic - Textured

## ACOUSTIC PANEL COLOR

**AP00** Not required

**AP02** Citrus

**AP04** White

**AP08** Red Coffee

**AP11** Light Gray

**AP13** Apple Green

**AP22** Blue

**AP26** Sesame Gray

**AP27** Black

**AP47** Navy Peony

**AP60** Pure Red

**AP73** Cloudburst

**AP89** Douglas Fir

**APW01** Oak

Acoustic panels 48" and larger will include a visible seam.For accompanying non-illuminating acoustic panels, see our Acoustic Circles, Quads, Triangles, and Ellipse spec pages. Other finishes available. Contact factory.

## EMERGENCY

**E0** Not required

**E2** Emergency system - Remote [1]

[1] For North America, the minimum emergency system wattage is 7.5W. Refer to the fixture's lumens per watt to estimate emergency light output. The emergency system typically powers only a portion of the fixture, depending on the fixture configuration and number of drivers. Consult factory for emergency system configuration and illuminated section details.
For Europe, the emergency system wattage and configuration may vary. Consult factory for details.


© 2026 Beta-Calco Inc. Specifications are subject to change without notice