

# RODEO SOLO™ - CONTINUOUS WALL

Project Name:

Fixture Type:

Fixture Code:

Quantities:

## A. LUMINAIRE

**RDSW1W** Direct

**RDSW2W** Direct/Indirect

One power cord for every 50 linear feet.

## B. LENGTH OF RUN

**SFA** \_ \_ \_ \_

Minimum length to order is 4ft and orders to be in 2ft increments.

Example: 4ft = SFA0400

Example: 10ft = SFA1000

Example: 50ft = SFA5000

For runs over 50ft in length, consult factory.

## C. MAX LENGTH PER SECTION

**SL04** 4ft

**SL06** 6ft

**SL08** 8ft

**SL10** 10ft

**SL12** 12ft

You can select the preferred maximum length per segment, to account for transportation and building constraints. Example: If a 40ft run is required and SL12 (12ft) is selected, we would provide 4 10ft segments. For special requirements, please contact [sales@betacalco.com](mailto:sales@betacalco.com).

## D. LM/FT (DIRECT)

**LPF030** 300 lm/ft

**LPF050** 500 lm/ft

**LPF070** 700 lm/ft

**LPF090** 900 lm/ft

Consult website for available lumens/ft.

## E. LM/FT (INDIRECT)

**LPG000** Not required

**LPG030** 300 lm/ft

**LPG050** 500 lm/ft

**LPG070** 700 lm/ft

**LPG090** 900 lm/ft

**LPG110** 1100 lm/ft

Consult website for available lumens/ft.

## F. CRI

**CR90** CRI 90+

## G. CCT

**CTA30** 3000K

**CTA35** 3500K

**CTA40** 4000K

## H. DIRECT DIFFUSER

**DD4** Comfort diffuser

## I. UPLIGHT DIFFUSER

**UD0** Not required

**UD2** Opal diffuser

**UD3** Asymmetric diffuser <sup>1</sup>

<sup>1</sup> Available up to 900 lm/ft. The asymmetric distribution will be directed away from the wall.

# RODEO SOLO™ - CONTINUOUS WALL

## J. VOLTAGE

**V1** 120/277V

**V2** 240V<sup>1</sup>

**V3** 347V<sup>2</sup>

**V4** Low Voltage<sup>3</sup>

<sup>1</sup> Not available in North America or with CS2 (Dual Circuit).

<sup>2</sup> Only available with DA01 dimming.

<sup>3</sup> Only available with DA45 dimming.

## K. FIXTURE DIMMING

**DA01** 0-10V Dimming 1.0%

**DA02** 0-10V Dimming 0.1%<sup>1</sup>

**DA20** DALI Dimming 0.1%<sup>1</sup>

**DA21** DALI Dimming 1.0%<sup>1</sup>

**DA30** DSL/switchDim<sup>2</sup>

**DA45** PoE<sup>3</sup>

<sup>1</sup> Not available with V3.

<sup>2</sup> Not available in North America.

<sup>3</sup> Only available with V4.

## L. FIXTURE FINISH

**FA01** White - Textured

**FA02** Black Metallic - Textured

**FA20** Silver Metallic - Textured

**FA25** Gold Metallic - Textured

**FA27** Wood grain - Light Cherry<sup>1</sup>

**FA28** Wood grain - Dark Walnut<sup>1</sup>

**FA44** Midnight Blue Metallic - Textured

**FA45** Copper Metallic

**FA46** Charcoal Metallic - Textured

**FA47** Bronze Metallic - Textured

**FA52** Champagne Metallic

**FA53** Red Metallic - Textured

<sup>1</sup> Longer than normal lead times may apply, consult factory.

## M. FIXTURE TRIM FINISH

**FC01** White

**FC24** Black Anodized

**FC58** Silver Anodized

**FC59** Gold Anodized

## N. EMERGENCY

**E0** Not required

**E2** Emergency system - Remote<sup>1</sup>

**E3** Emergency generated circuit<sup>2</sup>

<sup>1</sup> Only available with 0-10V 1% dimming. An extra power cord will be supplied to each section of the fixture when ordering emergency.

<sup>2</sup> A drawing will be required at time of ordering to determine the required number and location of the emergency sections or generator circuits. Not available in 347V.

## O. CIRCUITS

**CS1** Single circuit

**CS2** Dual circuit (Direct vs Indirect)<sup>1</sup>

<sup>1</sup> May be used under the following circumstances:

1) if ordering Emergency system

2) if required when ordering direct vs indirect





## P. SENSORS



# RODEO SOLO™ - CONTINUOUS WALL

## DIMENSIONAL DIAGRAMS

### Isometric Views

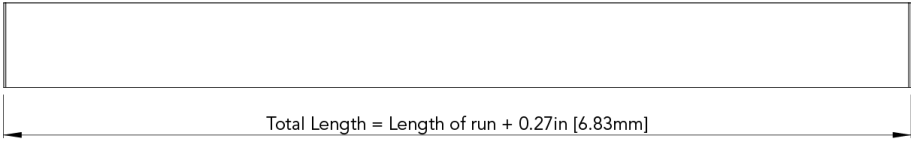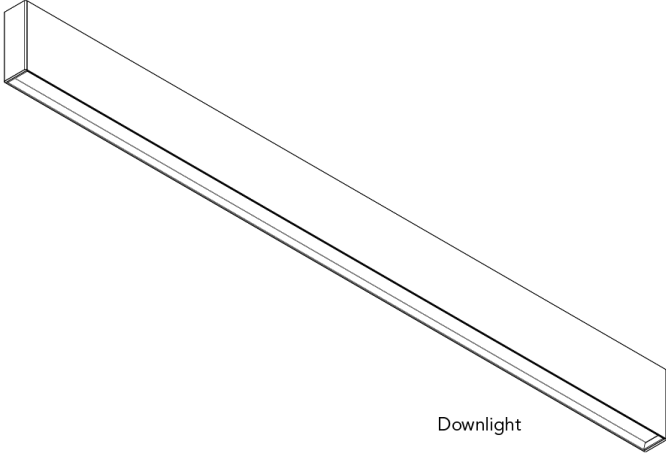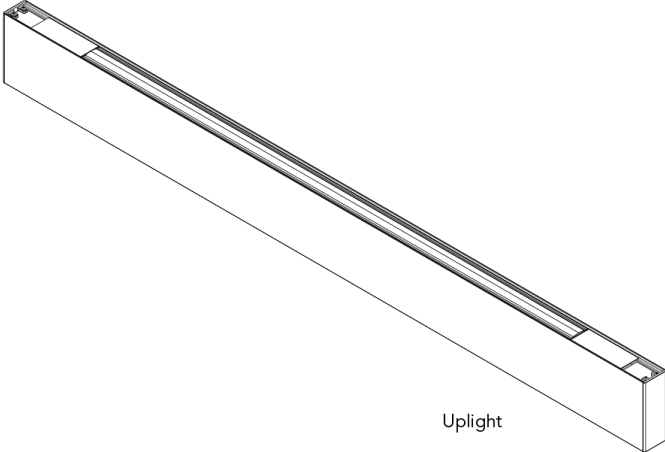

Top View [Uplight]




Bottom View [Downlight]


# RODEO SOLO™ - CONTINUOUS WALL

## Wall Mount Configurations


### 4FT

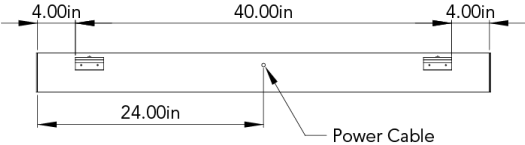


### 6FT

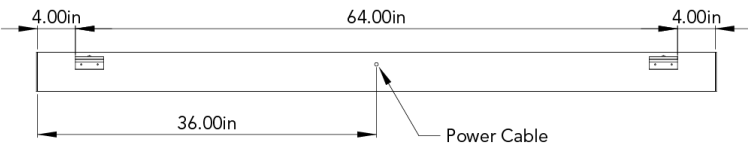

### 8FT

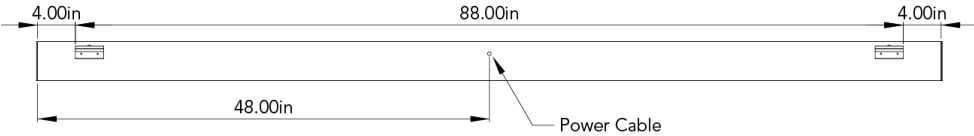

### 10FT

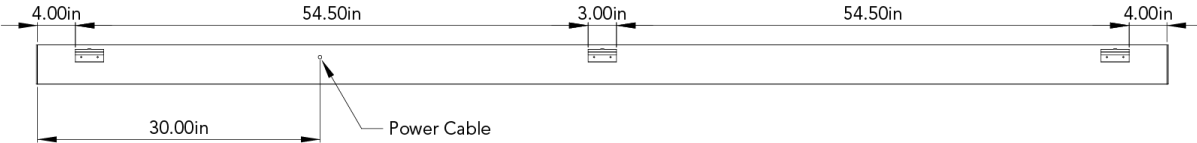

### 12FT

