


# RODEO SOLO™ - CONTINUOUS



Project Name:

Fixture Type:

Fixture Code:

Quantities:

## A. LUMINAIRE

**RDSP1P** Direct

**RDSP2P** Direct/Indirect

One power cord for every 50 linear feet.

## B. LENGTH OF RUN

**SFA** \_ \_ \_ \_

Minimum length to order is 4ft and orders to be in 2ft increments.

Example: 4ft = SFA0400

Example: 10ft = SFA1000

Example: 50ft = SFA5000

For runs over 50ft in length, consult factory.

## C. MAX LENGTH PER SECTION

**SL04** 4ft

**SL06** 6ft

**SL08** 8ft

**SL10** 10ft

**SL12** 12ft

You can select the preferred maximum length per segment, to account for transportation and building constraints. Example: If a 40ft run is required and SL12 (12ft) is selected, we would provide 4 10ft segments. For special requirements, please contact [sales@betacalco.com](mailto:sales@betacalco.com).

## D. LM/FT (DIRECT)

**LPF030** 300 lm/ft

**LPF050** 500 lm/ft

**LPF070** 700 lm/ft

**LPF090** 900 lm/ft

Consult website for available lumens/ft.

## E. LM/FT (INDIRECT)

**LPG000** Not required

**LPG030** 300 lm/ft

**LPG050** 500 lm/ft

**LPG070** 700 lm/ft

**LPG090** 900 lm/ft

**LPG110** 1100 lm/ft

**LPG135** 1350 lm/ft

Consult website for available lumens/ft.

## F. CRI

**CR90** CRI 90+

## G. CCT

**CTA30** 3000K

**CTA35** 3500K

**CTA40** 4000K

## H. DIRECT DIFFUSER

**DD4** Comfort diffuser

# RODEO SOLO™ - CONTINUOUS

## I. UPLIGHT DIFFUSER

**UDO** Not required

**UD1** Clear diffuser (Batwing distribution) **UD2** Opal diffuser <sup>1</sup>

**UD3** Asymmetric diffuser <sup>2</sup>

<sup>1</sup> Available up to 1100 lm/ft.

<sup>2</sup> Available up to 900 lm/ft.

## J. VOLTAGE

**V1** 120/277V

**V2** 240V <sup>1</sup>

**V3** 347V <sup>2</sup>

**V4** Low Voltage <sup>3</sup>

<sup>1</sup> Not available in North America or with CS2 (Dual Circuit).

<sup>2</sup> Only available with DA01 dimming.

<sup>3</sup> Only available with DA45 dimming.

## K. FIXTURE DIMMING

**DA01** 0-10V Dimming 1.0%

**DA02** 0-10V Dimming 0.1% <sup>1</sup>

**DA20** DALI Dimming 0.1% <sup>1</sup>

**DA21** DALI Dimming 1.0% <sup>1</sup>

**DA30** DSI/switchDim <sup>2</sup>

**DA45** PoE <sup>3</sup>

<sup>1</sup> Not available with V3.

<sup>2</sup> Not available in North America.

<sup>3</sup> Only available with V4.

## L. CEILING TYPE

**H1** Hard ceiling <sup>2</sup>

**G1** Grid ceiling <sup>1</sup>

The cost for the canopies, power cables, connections mechanisms and endcaps for the fixture has been added to these items.

<sup>1</sup> Combo kit provided includes installation to T-bar and through tile mount.

<sup>2</sup> Designed for drywall ceilings.

## M. SUSPENSION

**HLA03** 3ft cable suspension

**HLA06** 6ft cable suspension

**HLA09** 9ft cable suspension

## N. FIXTURE FINISH

**FA01** White

**FA02** Black Metallic - Textured

**FA20** Silver Metallic - Textured

**FA25** Gold Metallic - Textured

**FA27** Wood grain - Light Cherry <sup>1</sup>

**FA28** Wood grain - Dark Walnut <sup>1</sup>

**FA44** Midnight Blue Metallic - Textured

**FA45** Copper Metallic

**FA46** Charcoal Metallic - Textured

**FA47** Bronze Metallic - Textured

**FA52** Champagne Metallic

**FA53** Red Metallic - Textured

<sup>1</sup> Longer than normal lead times may apply, consult factory.

## O. CANOPY FINISH

**CF01** White

**CF02** Black Metallic - Textured

**CF20** Silver Metallic - Textured

**CF25** Gold Metallic - Textured

**CF44** Midnight Blue Metallic - Textured

**CF45** Copper Metallic

**CF46** Charcoal Metallic - Textured

**CF47** Bronze Metallic - Textured

**CF52** Champagne Metallic

**CF53** Red Metallic - Textured

## P. FIXTURE TRIM FINISH

**FC01** White

**FC24** Black Anodized

**FC58** Silver Anodized

**FC59** Gold Anodized



# RODEO SOLO™ - CONTINUOUS

## Q. EMERGENCY

**E0** Not required

**E2** Emergency system - Remote <sup>1</sup>

**E3** Emergency generated circuit <sup>2</sup>

---

<sup>1</sup> An extra power cord will be supplied to each section of the fixture when ordering emergency.

<sup>2</sup> A drawing will be required at time of ordering to determine the required number and location of the emergency sections or generator circuits. Not available in 347V.

## R. CIRCUITS

**CS1** Single circuit

**CS2** Dual circuit <sup>1</sup>

---

<sup>1</sup> May be used under the following circumstances:

- 1) if ordering Emergency system
- 2) if required when ordering direct vs indirect


## S. SENSORS



# RODEO SOLO™ - CONTINUOUS

## DIMENSIONAL DIAGRAMS

Fixture Profile

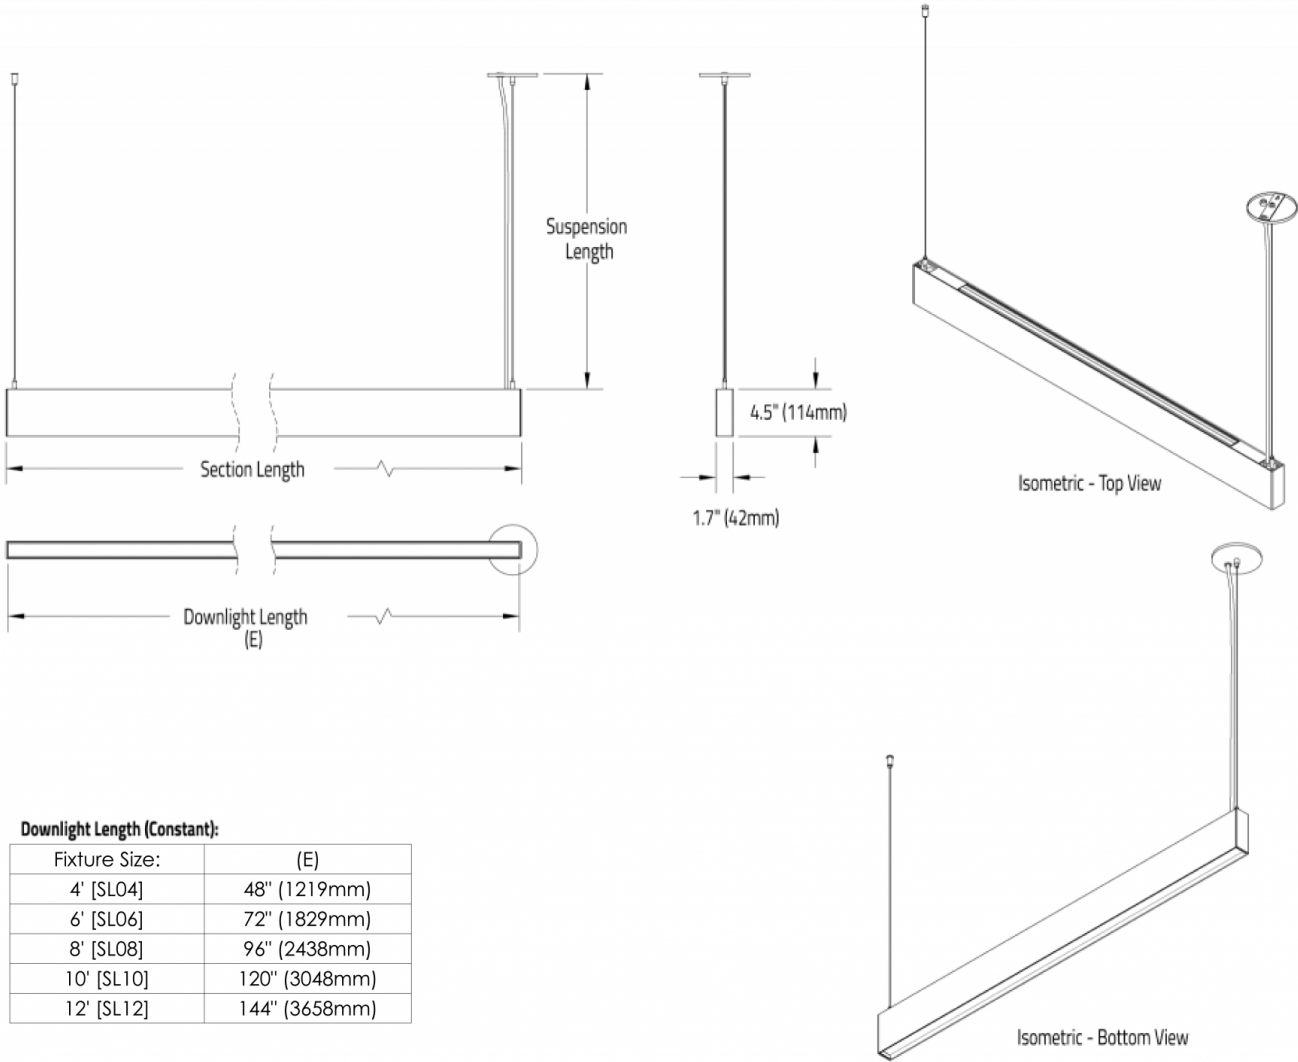

**Downlight Length (Constant):**


Fixture Size:	(E)
4' [SL04]	48" (1219mm)
6' [SL06]	72" (1829mm)
8' [SL08]	96" (2438mm)
10' [SL10]	120" (3048mm)
12' [SL12]	144" (3658mm)

# RODEO SOLO™ - CONTINUOUS

## Sections

### Standalone:

Standalone (SLS1) - End cap on both sides:



### Section Length:


Fixture Size:	Standalone [SLS1] (A)	Start [SLS2] (B)	Middle [SLS3] (C)	End [SLS4] (D)
4' [SL04]	48.2" (1224mm)	47.2" (1199mm)	47.9" (1217mm)	48.9" (1242mm)
6' [SL06]	72.0" (1778mm)	71.0" (1803mm)	71.7" (1821mm)	72.7" (1847mm)
8' [SL08]	95.9" (2436mm)	94.8" (2408mm)	95.5" (2426mm)	96.5" (2451mm)
10' [SL10]	119.7" (3040mm)	118.7" (3015mm)	119.4" (3033mm)	120.4" (3058mm)
12' [SL12]	143.6" (3647mm)	142.5" (3620mm)	143.2" (3637mm)	144.2" (3663mm)

### Continuous Run:

Start (SLS2) - End cap on left side:


Middle (SLS3) - No end caps

End (SLS4) - End cap on right side




## Indirect Sections


HS0-HE0:

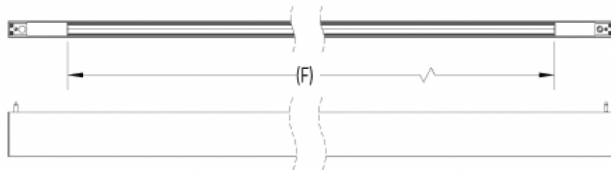


HS2-HE0:

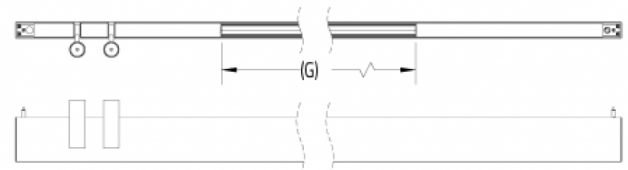

HS0-HE2:

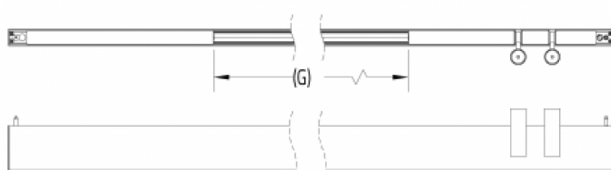

HS2-HE2:

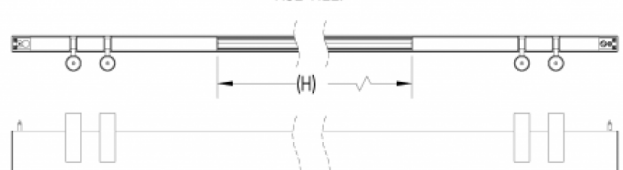


### Indirect Light Length:

Fixture Size:	(F)
4' [SL04]	36.7" (932mm)
6' [SL06]	60.3" (1532mm)
8' [SL08]	84.2" (2139mm)
10' [SL10]	108.2" (2748mm)
12' [SL12]	120.2" (3053mm)

# RODEO SOLO™ - CONTINUOUS

Canopy

Hard Ceiling [H1]:

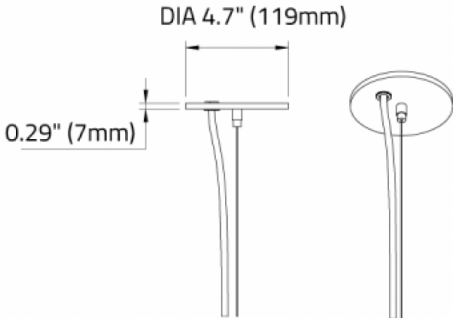

Grid Ceiling [G1]:

