


SCALA™ - RECESSED

Project Name:	Fixture Type:
Fixture Code:	Quantities:



SCALA™ - RECESSED

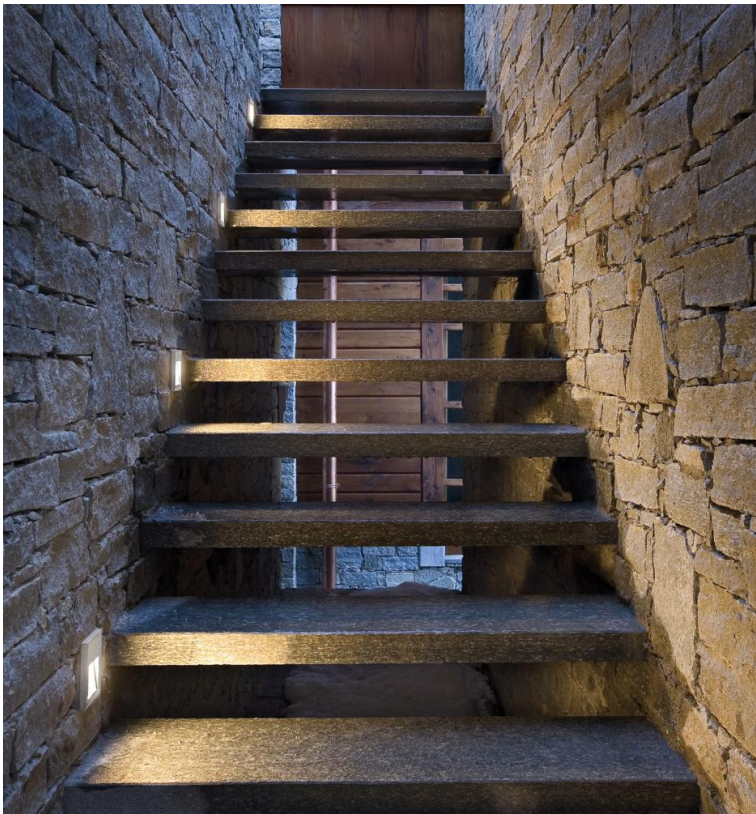


SCALA™ - RECESSED

SCALA is designed to blend into the architecture while illuminating steps and pathways. With asymmetric light distribution, Scala makes efficient use of the light output directing it to exactly where it is required. There are 4 form factors with various orientations available to suit the exterior aesthetics, as well as 3 polyester-based finishes. Turtle-friendly, amber LED is also available.

GENERAL SPECIFICATION

Housing	Finish
Low copper, die-cast aluminum highly resistant to oxidation.	Powder coated polyester highly resistant to UV and oxidation.
Diffuser	Gasket
3mm/0.12" sodium calcium tempered glass.	Silicone.
External Screws	Cable Entry
A4 stainless steel treated with highly antioxidant water-repellent lubricating solution to ensure easy opening.	Silicone cable gland for cables DIA 10-14mm/0.4-0.55".
Drivers	Rough-In Housing
HPF electronic, 120-277V (120V for Type C and D).	Thermoplastic.
Mechanical	Delivered Lumens
Recessed luminaire for wall mounting only into brick or concrete.	Delivered lumens & LPW based on 3000K (min 80 CRI).
Dark Sky Friendly	
Dark Sky Friendly if ordered with 3000K CCT.	

MOUNTING & OPTICS

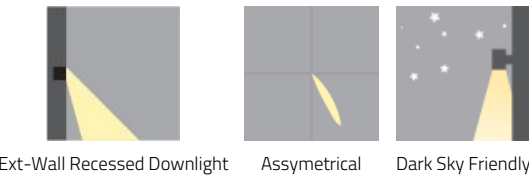

SCALA™ - RECESSED

HOW TO ORDER

A. LUMINAIRE

8208710 A Type, 570 lms	8208712 B Type, 570 lms	8208714 C Type, 285 lms	8208716 C Type, 500 lms
8208718 D Type, 75 lms			

B. CCT

30 3000K (min 80 CRI)	40 4000K (min 80 CRI)	TF Amber LED (Turtle Friendly)
------------------------------	------------------------------	---------------------------------------

C. FINISH

BL Black Metallic Textured	AG Anthracite Gray	GR Light Gray
-----------------------------------	---------------------------	----------------------

D. DIMMING

DB Dimming Types A & B only (0-10V) ¹

¹ Dimming equal to or less than 10%.

E. ROUGH-IN HOUSINGS (REQUIRED)

RIH5408 Rough-In Housing for Type A	RIH5406 Rough-In Housing for Type B	RIH5409 Rough-In Housing for Type C	RIH5410 Rough-In Housing for Type D
--	--	--	--

SCALA™ - RECESSED

TECHNICAL DATA

LUMINAIRE

Code	8208710	8208712	8208714	8208716	8208718
Power (LED)	6W	6W	3W	6W	2W
Type	A	B	C	C	D
Initial Lumens	570	570	285	500	75

LUMINAIRE



FINISH



APPROVALS



SCALA™ - RECESSED

DIMENSIONAL DIAGRAMS

