SENTIS™

FULL SPECIFICATION SHEET




FIXTURE TYPE	FIXTURE CODE	QUANTITIES

1 DESCRIPTION

SENTIS is a robustly designed transitional-style wall sconce, ideally suited for high-traffic zones. Available as a minimalist style with an exposed lens or with a decorative and protective grill in 3 finishes. The fixture also comes with the option of adding a perforated mesh (for TQ only) or a vertical bar (for OP & TQ only). Constructed with die-formed steel and die-cast zinc, using an opal acrylic halo lens, this is a durable and contemporary product that adds a traditional flair to various settings, especially hallways and corridors. This fixture beautifully combines modern minimalism with contemporary elegance to perfectly complement your space.

2 OPTICS & FEATURES


Wall Front/Back


General Diffuse



Declare

3 APPROVALS

ADA Intertek CE F IP20

4 GENERAL SPECIFICATION

HOUSING
Die-formed steel.

HORIZONTAL BARS
Die-cast zinc.

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

PERFORATED ACCENTS
Steel, finished as specified.

FINISH
Powder coated paint or plated.

MECHANICAL
Mounts directly to a standard electrical junction box (by others - North America only). Additional mounting points provided. Mounting hardware (by others).

DRIVERS
HPF electronic, 120-277V (EU-240V). 0-10V, 1% dimming standard. The driver is integral to the fixture housing.

SENSORS
Consult factory regarding sensor compatibility.

FRONT LENS
UV stabilized polycarbonate with vertical ribs.

REAR SIDE (HALO) LENS
Extruded opal acrylic.

UPPER AND LOWER DUST COVERS
Opal polycarbonate.

DELIVERED LUMENS
Delivered lumens & LPW based on 3000K (min 80 CRI).

APPROVALS
Damp location, (Indoor use only).

SUSTAINABILITY
Designed for on-site LED board, driver, and optic replacement. Contact the factory for maintenance documentation.

5 DESIGN OPTIONS

FINISH

White


Silver Metallic Textured


Bronze Metallic Textured

6 HOW TO ORDER

LUMINAIRE	CRI	CCT	FASCIA
326100 14", 1311 lms	**CR80** CRI 80+	**30** 3000K	**OP** Style OP
326102 18", 1865 lms	**CR90** CRI 90+	**35** 3500K	**TQ** Style TQ
326104 24", 2592 lms		**40** 4000K	
326106 36", 4333 lms			
326108 48", 5523 lms			

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

FINISH	OPTIONS
WH White	**PM** Perforated Mesh Accents (TQ only)
MS Silver Metallic Textured	**VB** Vertical Bar (OP & TQ only)
BM Bronze Metallic Textured	


7 TECHNICAL DATA

LUMINAIRE


Code	**326100**	**326102**	**326104**	**326106**	**326108**
Power (LED)	14W	20W	28W	47W	59W
Delivered lms	1311	1865	2592	4333	5523
LPW	93	95	94	92	94
Type (A)	14"	18"	24"		
Type (B)				36"	48"

8 DIMENSIONAL DIAGRAMS

Style OP

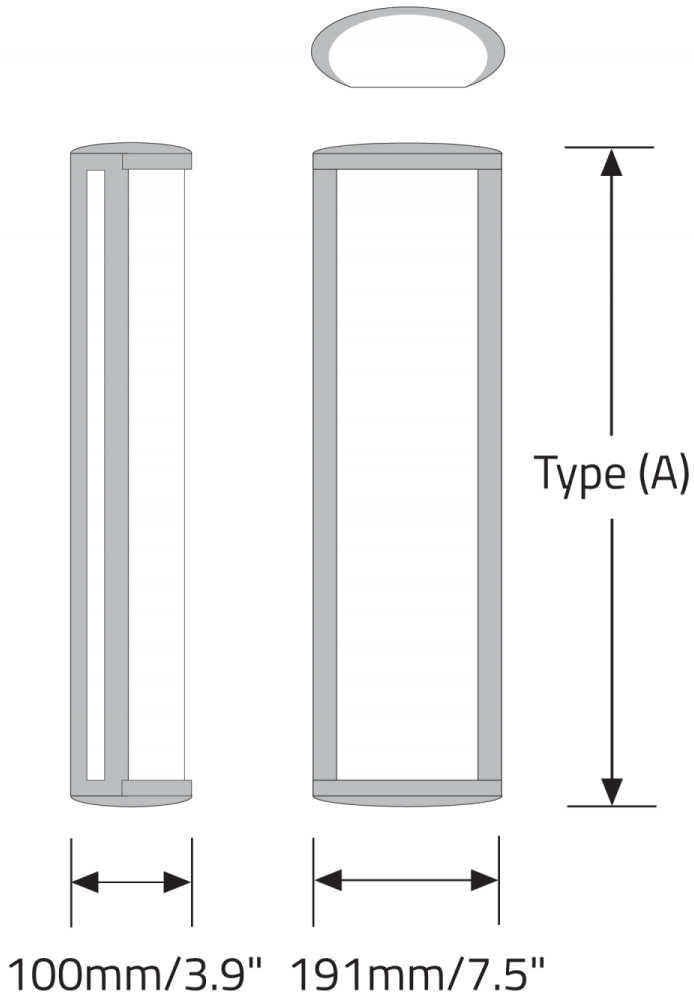


Style OP

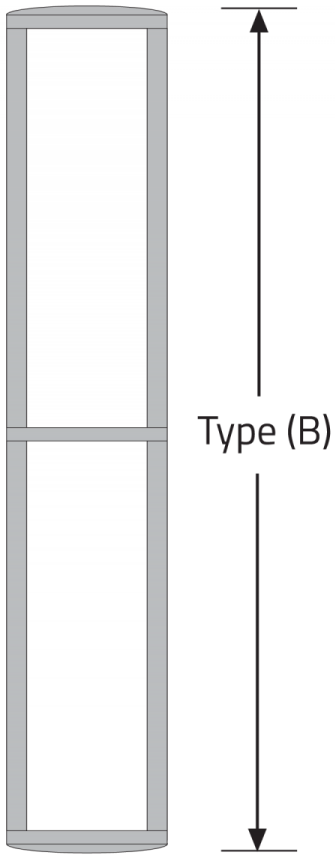


© 2026 Beta-Calco Inc. Specifications are subject to change without notice

Style TQ

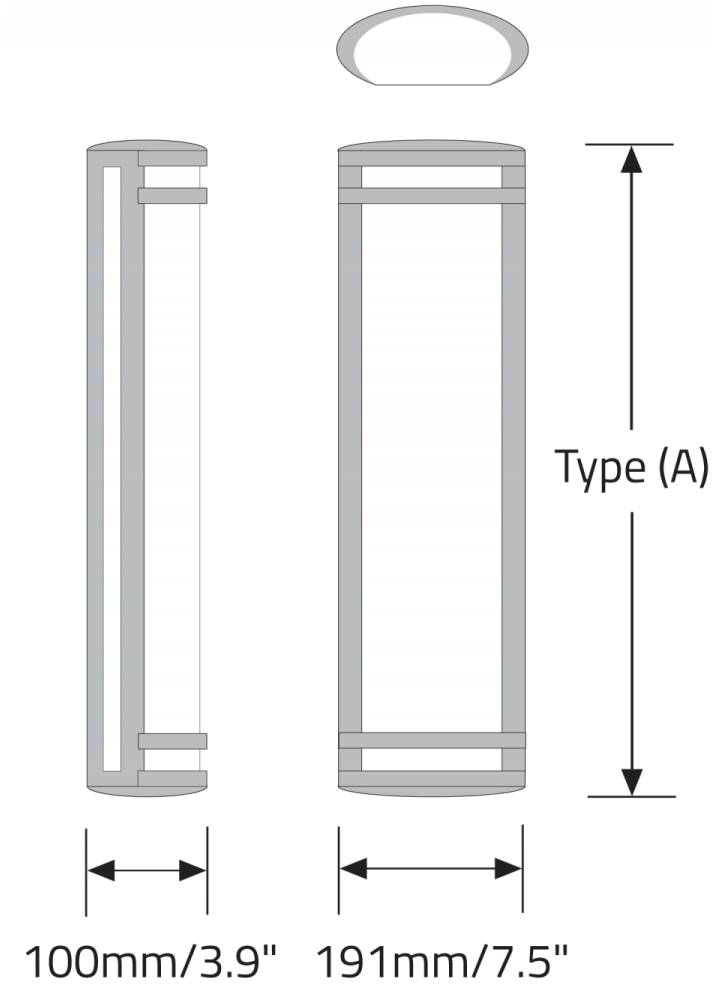

Style TQ

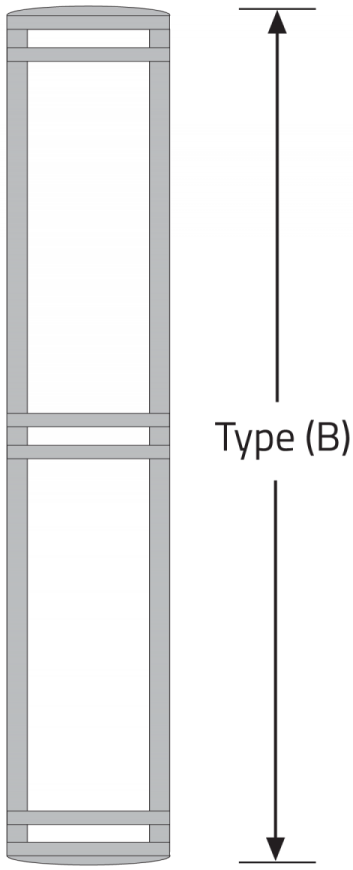

© 2026 Beta-Calco Inc. Specifications are subject to change without notice