


SENTIS™ - WALL

| | |
|---------------|---------------|
| Project Name: | Fixture Type: |
| Fixture Code: | Quantities: |



SENTIS™ - WALL

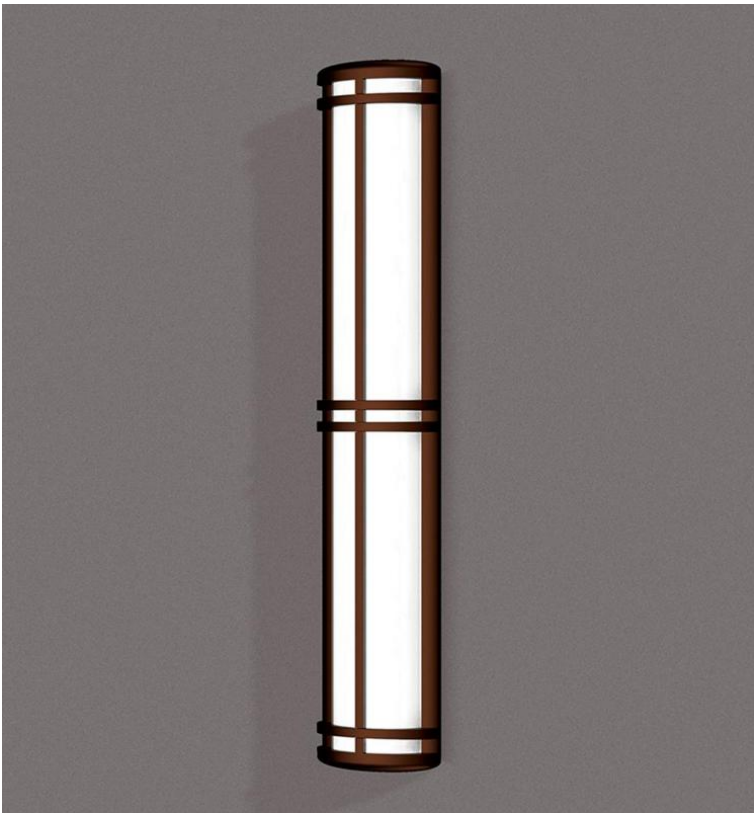

SENTIS™ - WALL

SENTIS is a robustly designed transitional-style wall sconce, ideally suited for high-traffic zones. Available as a minimalist style with an exposed lens or with a decorative and protective grill in 3 finishes. The fixture also comes with the option of adding a perforated mesh (for TQ only) or a vertical bar (for OP & TQ only). Constructed with die-formed steel and die-cast zinc, using an opal acrylic halo lens, this is a durable and contemporary product that adds a traditional flair to various settings, especially hallways and corridors. This fixture beautifully combines modern minimalism with contemporary elegance to perfectly complement your space.

GENERAL SPECIFICATION

Housing

Die-formed steel.

Perforated accents

Steel, finished as specified.

Mechanical

Mounts directly to a standard electrical junction box (by others - North America only). Additional mounting points provided. Mounting hardware (by others).

Sensors

Consult factory regarding sensor compatibility.

Rear Side (Halo) Lens

Extruded opal acrylic.

Delivered Lumens

Delivered lumens & LPW based on 3000K (min 80 CRI).

Horizontal bars

Die-cast zinc.

Finish

Powder coated paint or plated.

Drivers

HPF electronic, 120-277V (EU-240V). 0-10V, 1% dimming standard. The driver is integral to the fixture housing.

Front Lens

UV stabilized polycarbonate with vertical ribs.


Upper and lower dust covers

Opal polycarbonate.


Approvals

Damp location, (Indoor use only).


OPTICS & FEATURES



Wall Front/Back



General Diffuse



Declare



SENTIS™ - WALL

HOW TO ORDER

A. LUMINAIRE

| | | | |
|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
| 326100 14", 1311 lms | 326102 18", 1865 lms | 326104 24", 2592 lms | 326106 36", 4333 lms |
| 326108 48", 5523 lms | | | |

B. CRI

| | |
|---------------------|---------------------|
| CR80 CRI 80+ | CR90 CRI 90+ |
|---------------------|---------------------|

C. CCT

| | | |
|-----------------|-----------------|-----------------|
| 30 3000K | 35 3500K | 40 4000K |
|-----------------|-----------------|-----------------|

D. FASCIA

| | |
|--------------------|--------------------|
| OP Style OP | TQ Style TQ |
|--------------------|--------------------|

E. FINISH

| | | |
|-----------------|------------------------------------|------------------------------------|
| WH White | MS Silver Metallic Textured | BM Bronze Metallic Textured |
|-----------------|------------------------------------|------------------------------------|

F. OPTIONS

| | |
|---|---------------------------------------|
| PM Perforated Mesh Accents (TQ only) | VB Vertical Bar (OP & TQ only) |
|---|---------------------------------------|

SENTIS™ - WALL

TECHNICAL DATA

LUMINAIRE

| Code | 326100 | 326102 | 326104 | 326106 | 326108 |
|---------------|--------|--------|--------|--------|--------|
| Power (LED) | 14W | 20W | 28W | 47W | 59W |
| Delivered lms | 1311 | 1865 | 2592 | 4333 | 5523 |
| LPW | 93 | 95 | 94 | 92 | 94 |
| Type (A) | 14" | 18" | 24" | | |
| Type (B) | | | | 36" | 48" |

FINISH




APPROVALS




DIMENSIONAL DIAGRAMS

Style OP

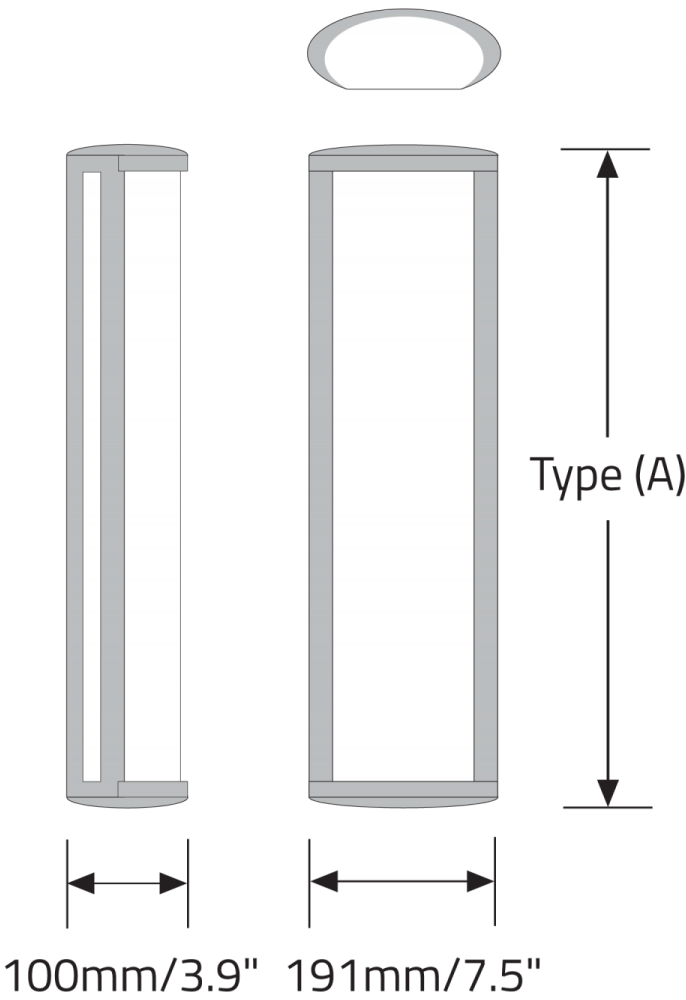


Style OP

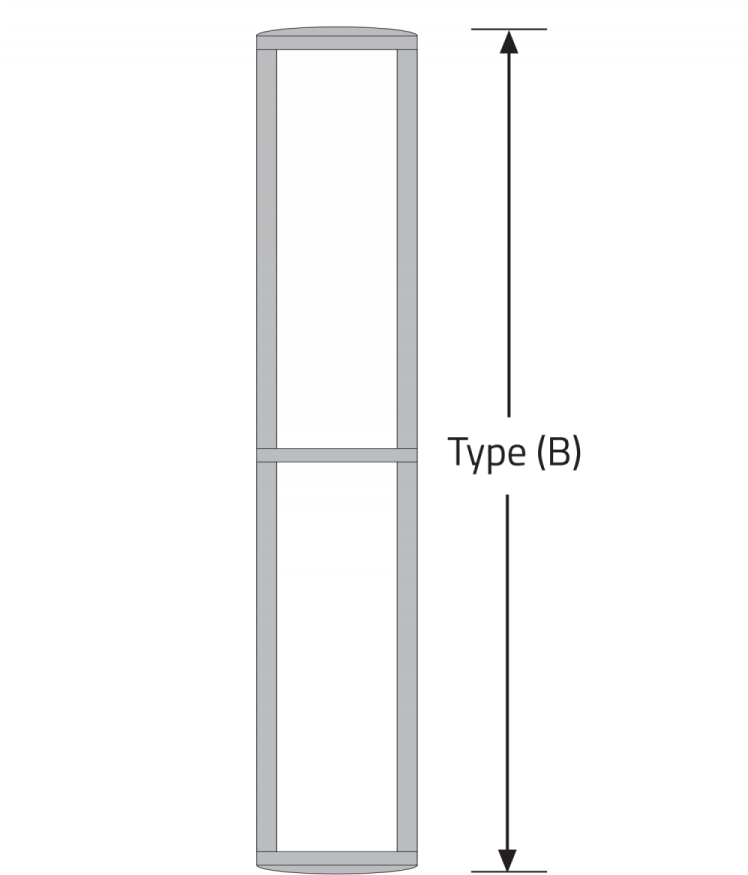

SENTIS™ - WALL

Style TQ

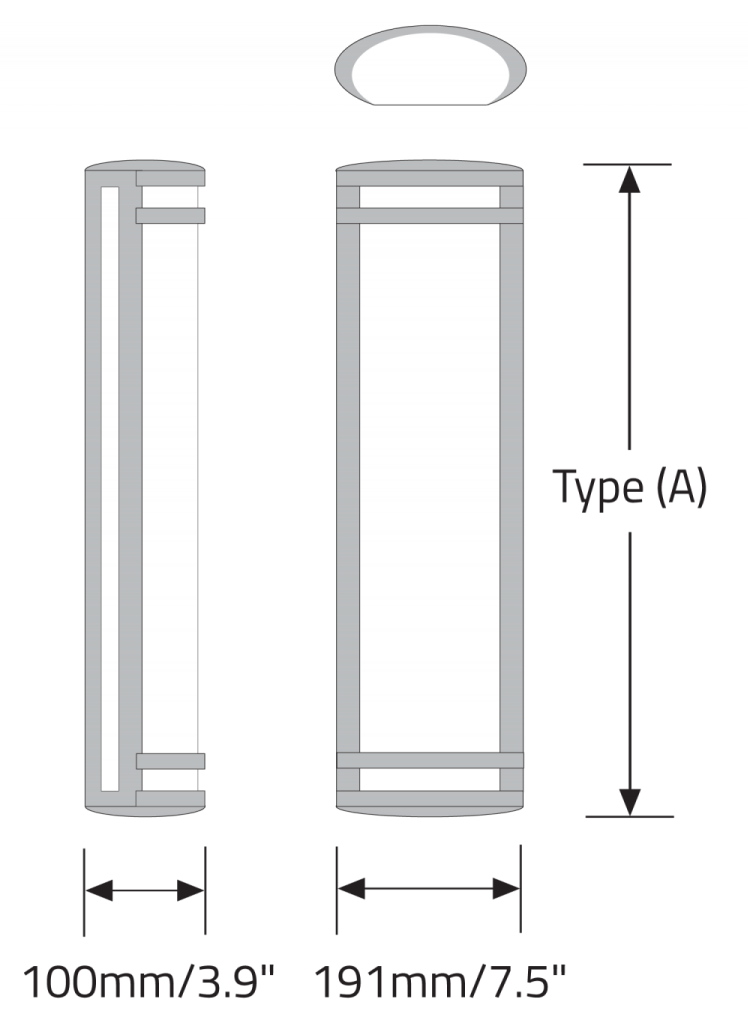

Style TQ

