
Project Name: Fixture Type:

Fixture Code: Quantities:







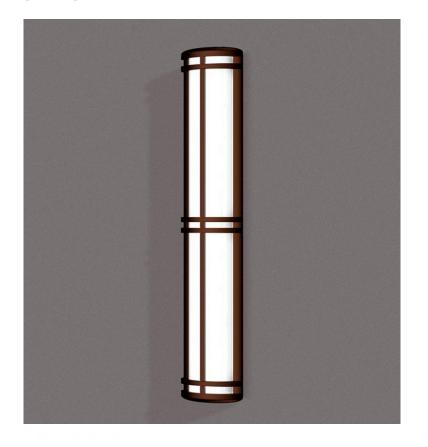



SENTIS is a robustly designed transitional-style wall sconce, ideally suited for high-traffic zones. Available as a minimalist style with an exposed diffuser or with a decorative and protective grill in 8 finishes.

GENERAL SPECIFICATION

Housing

Die-Formed steel.

Perforated accents

Steel, finished as specified.

Mechanical

Mounts directly to a standard electrical junction box (by others - North America only). Additional mounting points provided. Mounting hardware (by others).

Sensors

Consult factory regarding sensor compatibility.

Rear Side (Halo) Lens

Extruded opal acrylic.

Delivered Lumens

Delivered lumens & LPW based on 3000K (min 80 CRI).

OPTICS & FEATURES



Wall Front/Back





General Diffuse



Declare

Horizontal bars

Die-cast zinc.

Finish

Powder coated paint or plated.

Drivers

HPF electronic, 120–277V (EU-240V). 0-10V, 1% dimming standard. The driver is integral to the fixture housing.

Front Lens

UV stabilized polycarbonate with vertical ribs.

Upper and lower dust covers

Opal polycarbonate.

Approvals

Damp location, (Indoor use only).

HOW TO ORDER

A. LUMINAIRE

326100 14", 1311 lms **326102** 18", 1865 lms **326104** 24", 2592 lms **326106** 36", 4333 lms

326108 48", 5523 lms

B. CRI

CR80 CRI 80+ **CR90** CRI 90+

C. CCT

30 3000K **35** 3500K **40** 4000K

D. FASCIA

OP Style OP **TQ** Style TQ

E. FINISH

WH White MS Silver Metallic Textured BM Bronze Metallic Textured

F. OPTIONS

PM Perforated Mesh Accents (TQ only) **VB** Vertical Bar (OP & TQ only)

TECHNICAL DATA

LUMINAIRE

| Code | 326100 | 326102 | 326104 | 326106 | 326108 |
|---------------|--------|--------|--------|--------|--------|
| Power (LED) | 14W | 20W | 28W | 47W | 59W |
| Delivered Ims | 1311 | 1865 | 2592 | 4333 | 5523 |
| LPW | 93 | 95 | 94 | 92 | 94 |
| Type (A) | 14" | 18" | 24" | | |
| Type (B) | | | | 36" | 48" |

FINISH







White

Silver Metallic Textured Bronze Metallic Textured

APPROVALS












DIMENSIONAL DIAGRAMS

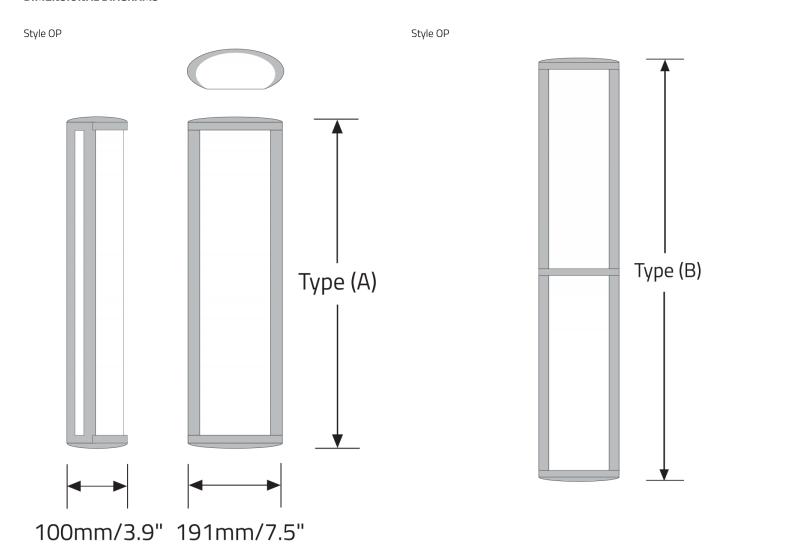

Style TQ

Type (A)

Type (B)

100mm/3.9" 191mm/7.5"