





# SENTIS™


## FULL SPECIFICATION SHEET



FIXTURE TYPE



FIXTURE CODE




QUANTITIES


### 1 DESCRIPTION

**SENTIS** is a robustly designed transitional-style wall sconce, ideally suited for high-traffic zones. Available as a minimalist style with an exposed lens or with a decorative and protective grill in 3 finishes. The fixture also comes with the option of adding a perforated mesh (for TQ only) or a vertical bar (for OP & TQ only). Constructed with die-formed steel and die-cast zinc, using an opal acrylic halo lens, this is a durable and contemporary product that adds a traditional flair to various settings, especially hallways and corridors. This fixture beautifully combines modern minimalism with contemporary elegance to perfectly complement your space.


### 2 OPTICS & FEATURES



Wall Front/Back



General Diffuse



Declare

### 3 APPROVALS



### 4 GENERAL SPECIFICATION

#### HOUSING

Die-formed steel.

#### HORIZONTAL BARS

Die-cast zinc.

#### PERFORATED ACCENTS

Steel, finished as specified.

#### MECHANICAL

Mounts directly to a standard electrical junction box (by others - North America only). Additional mounting points provided.  
Mounting hardware (by others).

#### SENSORS

Consult factory regarding sensor compatibility.

#### REAR SIDE (HALO) LENS

Extruded opal acrylic.

#### DELIVERED LUMENS

Delivered lumens & LPW based on 3000K (min 80 CRI).

#### FINISH

Powder coated paint or plated.

#### DRIVERS

HPF electronic, 120-277V (EU-240V). 0-10V, 1% dimming standard.  
The driver is integral to the fixture housing.

#### FRONT LENS

UV stabilized polycarbonate with vertical ribs.

#### UPPER AND LOWER DUST COVERS

Opal polycarbonate.

#### APPROVALS

Damp location, (Indoor use only).

## 5 DESIGN OPTIONS

#### FINISH



White



Silver  
Metallic  
Textured



Bronze  
Metallic  
Textured

## 6 HOW TO ORDER

### 1. LUMINAIRE

**326100** 14", 1311 lms  
**326108** 48", 5523 lms

**326102** 18", 1865 lms

**326104** 24", 2592 lms

**326106** 36", 4333 lms

### 2. CRI

**CR80** CRI 80+

**CR90** CRI 90+

### 3. CCT

**30** 3000K

**35** 3500K

**40** 4000K

#### 4. FASCIA

OP Style OP

TQ Style TQ

#### 5. FINISH

WH White

MS Silver Metallic Textured

BM Bronze Metallic Textured

#### 6. OPTIONS

PM Perforated Mesh Accents (TQ VB Vertical Bar (OP & TQ only)  
only)

### 7 TECHNICAL DATA


#### LUMINAIRE

Code	326100	326102	326104	326106	326108
Power (LED)	14W	20W	28W	47W	59W
Delivered lms	1311	1865	2592	4333	5523
LPW	93	95	94	92	94
Type (A)	14"	18"	24"		
Type (B)				36"	48"


8 DIMENSIONAL DIAGRAMS

Style OP

Style OP

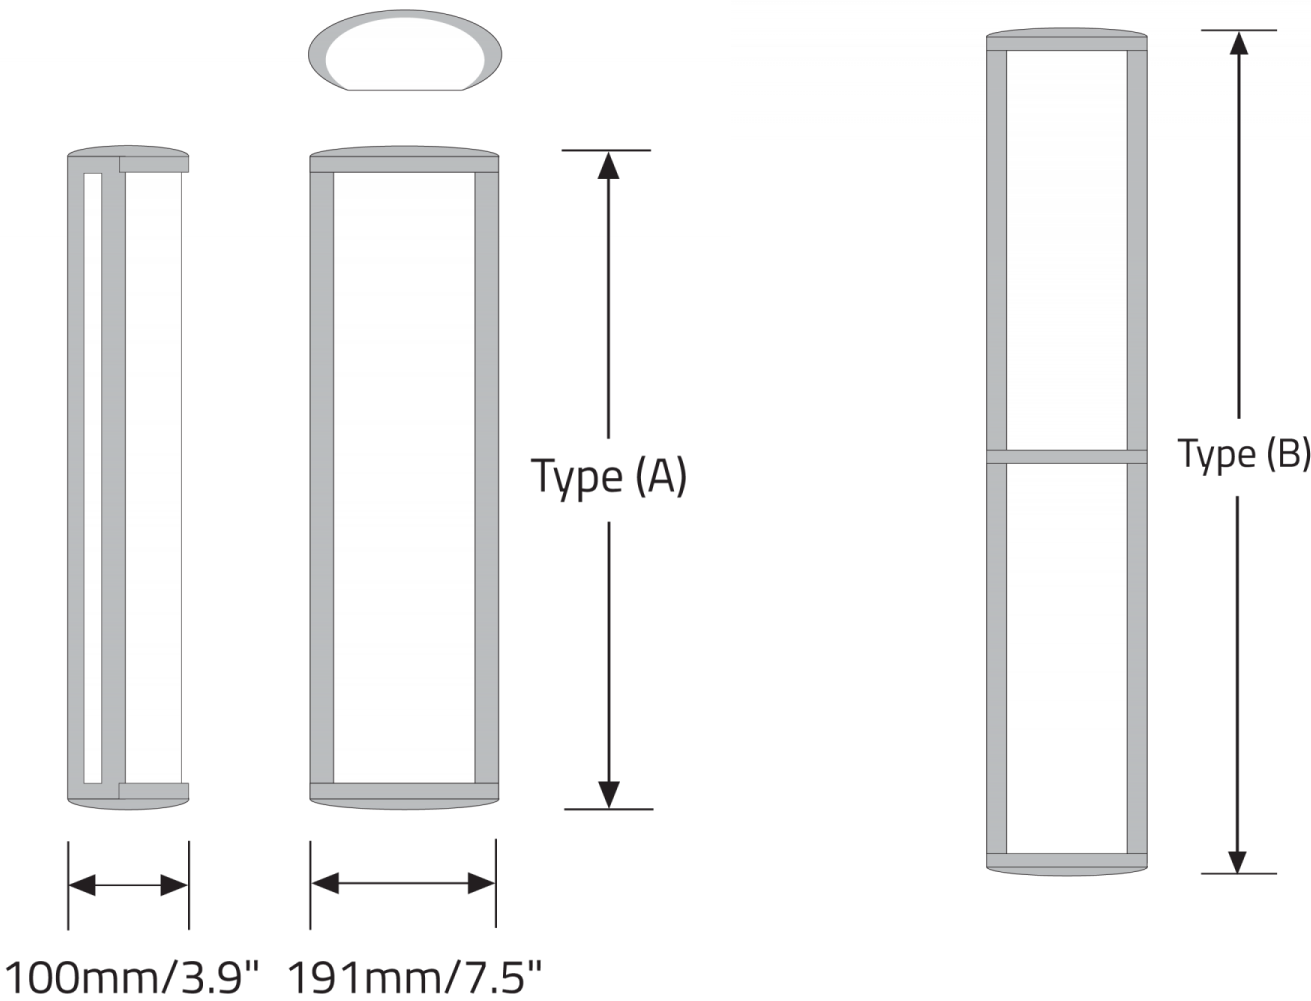

Style TQ

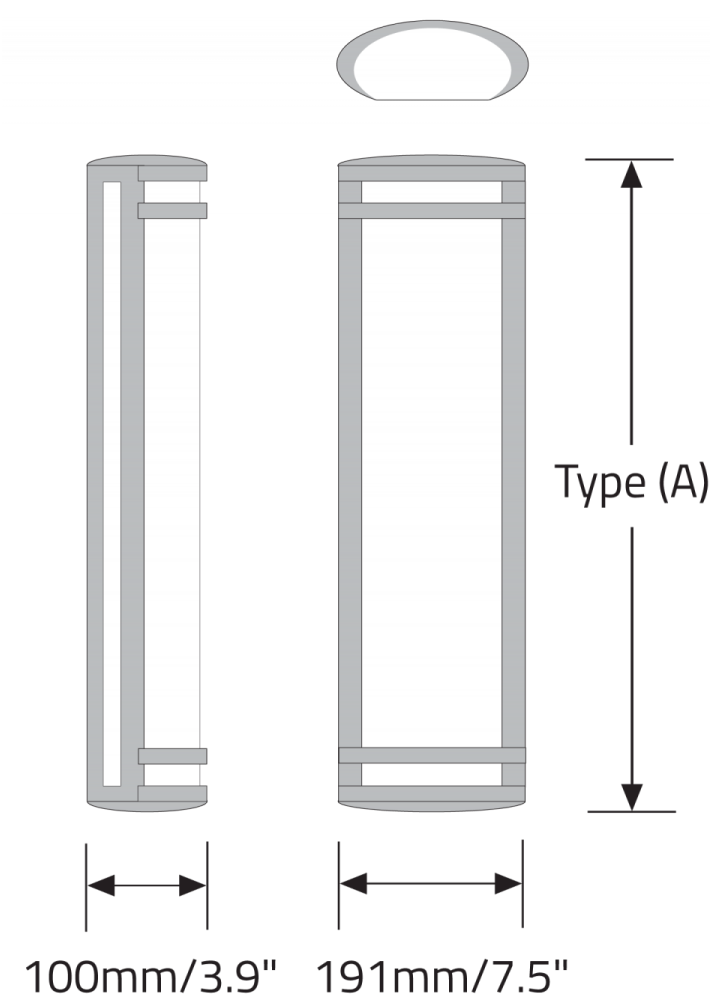

Style TQ

