
Project Name: Fixture Type:

Fixture Code: Quantities:







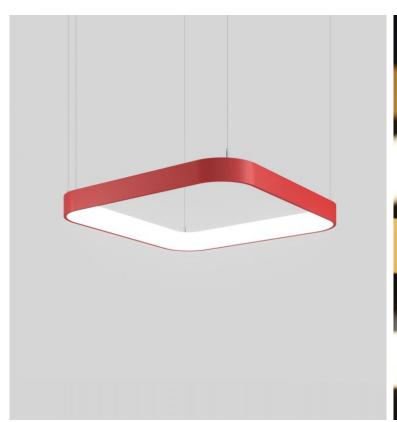



The optically engineered diffuser throws the light downwards exactly where it is required, whilst creating a subtle indirect glow on the ceiling. Ideally suited for atriums, lobbies, boardrooms and reception areas.

GENERAL SPECIFICATION

Body

Aluminum and steel.

Drivers

HPF electronic for 120-277V (EU-240V). The driver is mounted remotely.

Remote emergency

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch (NA only) Maximum distance between wall/ceiling plate and luminaire is 25' (7.6m). Test switch fits a single gang box (not supplied).

Delivered lumens

Delivered lumens & LPW based on 4000K, CRI 80+

Reported L70 @25°C (77°F)

> 50,000 hrs.

Seismic Bracing

Seismic bracing kits are available to meet compliance requirements. Consult the factory for details.

OPTICS & FEATURES









Suspended Direct/Indirect Direct-indirect

Declare

Lens

Opal acrylic.

PoE

Soft Sq can integrate into your data network via Power over Ethernet (PoE) connectivity.

Remote mounting of drivers

Wire Size (max distance from canopy to drivers) 18 AWG - 9.5' (2.9m), 16 AWG - 19.5' (5.9m), 14 AWG - 29.5' (9m). Drivers must be accessible after installation.

Sensors

Consult factory regarding sensor compatibility.

Approvals

Damp Rated.

HOW TO ORDER

A. LUMINAIRE

FTQP1P02 22", 4500 lms **FTQP1P03** 36", 8100 lms **FTQP1P04** 48", 10800 lms

All data shown at max output and nominal values.

B. LUMENS

 LMA0230
 2300
 LMA0400
 4000
 LMA0450
 4500
 LMA0540
 5400

 LMA0810
 8100
 LMA1080
 10800

Consult website for available lumens/Square (A).

C. CRI

CR80 CRI 80+ **CR90** CRI 90+

D. CCT

CTA27 2700K CTA30 3000K CTA35 3500K CTA40 4000K

E. VOLTAGE

V1 120/277V **V2** 240V 1 **V3** 347V 2 **V4** Low Voltage 3

F. DIMMING (REMOTE ONLY)

 DA01 0-10V Dimming 1.0%
 DA02 0-10V Dimming 0.1%
 DA10 0-10V Dimming 10.0%
 DA20 DALI Dimming 0.1%

 DA21 DALI Dimming 1.0%
 DA30 DSI/switchDim¹
 DA45 PoE²

G. SUSPENSION

SS2 Vertical, remote driver

H. FIXTURE FINISH

FA01 White FA02 Black Metallic - Textured FA20 Silver Metallic - Textured FA25 Gold Metallic - Textured FA27 Wood grain - Light Cherry 1 FA28 Wood grain - Dark Walnut 1 FA30 Wood grain - White Oak 1 FA44 Midnight Blue Metallic - Textured FA45 Copper Metallic - Textured FA47 Bronze Metallic - Textured FA52 Champagne Metallic FA53 Red Metallic - Textured

I. CANOPY FINISH

CF01 WhiteCF02 Black Metallic - TexturedCF20 Silver Metallic - TexturedCF25 Gold Metallic - TexturedCF44 Midnight Blue Metallic - TexturedCF45 Copper MetallicCF46 Charcoal Metallic - TexturedCF47 Bronze Metallic - TexturedCF52 Champagne MetallicCF53 Red Metallic - Textured

¹ Not available in North America.

² Only available with DA01 dimming.

³ To be used with DA45 only.

¹ Not available in North America.

² Must be used with V4 only.

¹ Wood grain finishes may incur longer lead times and setup charges. Consult factory for details.

J. EMERGENCY

EO Not required

E2 Emergency system - Remote


TECHNICAL DATA

LUMINAIRE

All data shown at max output and nominal values.


Code	FTQP1P02	FTQP1P03	FTQP1P04
Square (A)	22"	36"	48"
Max Wattage	53W	96W	127W
Down/Up Ratio	80/20	80/20	80/20
Max Delivered Ims	4500	8100	10800
Max LPW	90	89	90

FINISH - FIXTURE

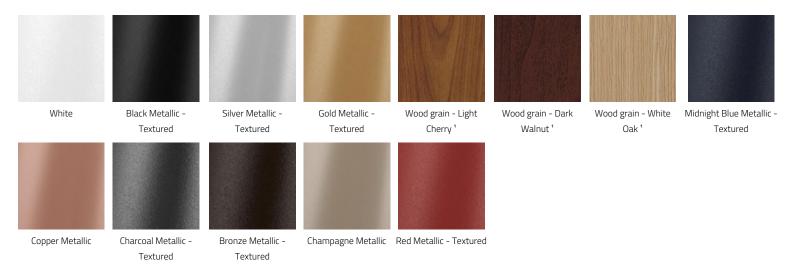

¹ Wood grain finishes may incur longer lead times and setup charges. Consult factory for details.

FINISH - CANOPY

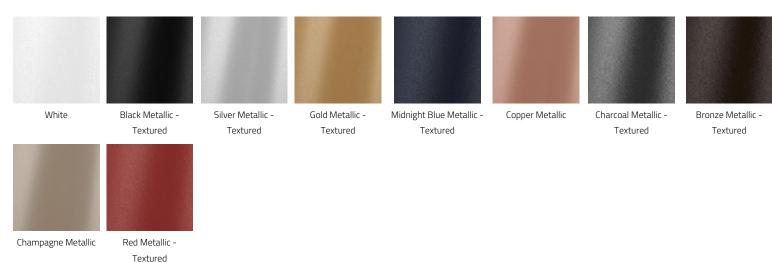

APPROVALS









DIMENSIONAL DIAGRAMS

2FT

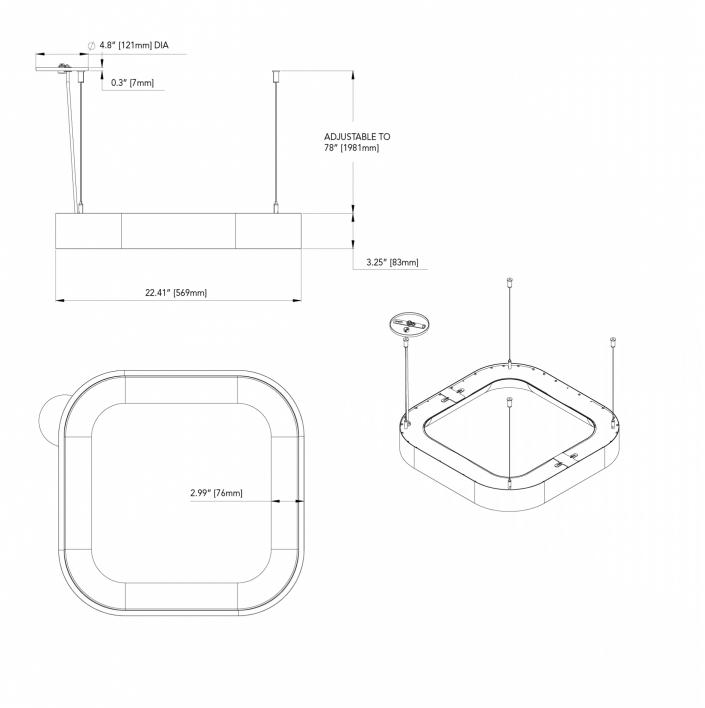

3FT

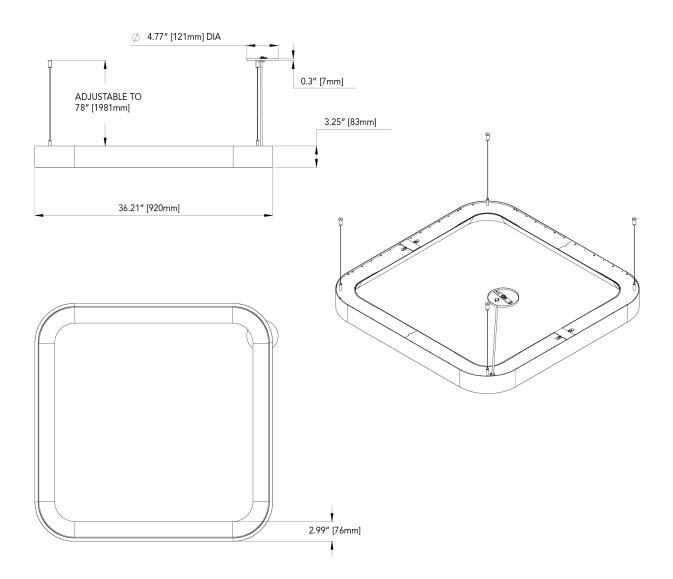

4FT

