




SPECTIVE™

SHORT SPECIFICATION SHEET

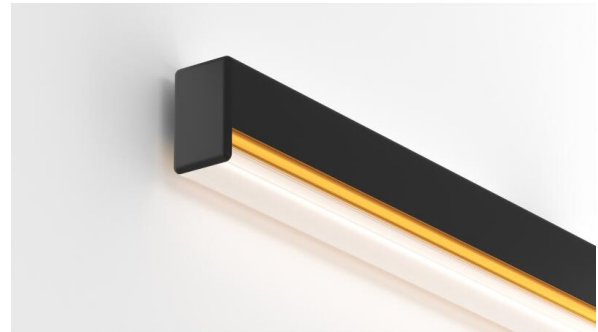

FIXTURE TYPE



FIXTURE CODE



QUANTITIES

1 HOW TO ORDER

1. LUMINAIRE

SPEW1W Direct

SPEW2W Direct/Indirect

¹ Will consist of two pieces connected. All data based on max values, consult Performance Data download for more details.

2. LENGTH OF RUN

Length of run is 4', 6', 8', 10' or 12' only, not available as a continuous run.

SFA_ _ _ _

3. FIXTURE LENGTH

SL04 4ft

SL06 6ft

SL08 8ft

SL10 10ft

SL12 12ft

4. LUMENS/FT DIRECT

LPF020 200 lm/ft

LPF040 400 lm/ft

LPF060 600 lm/ft

5. LUMENS/FT INDIRECT

LPG000 Not required

LPG020 200 lm/ft

LPG040 400 lm/ft

LPG060 600 lm/ft

LPG080 800 lm/ft

LPG100 1000 lm/ft

LPG120 1200 lm/ft

6. CRI

CR90 CRI 90+

7. CCT

CTA27 2700K

CTA30 3000K

CTA35 3500K

CTA40 4000K

CTA60 Tunable White ¹

¹ Consult factory.

8. DIRECT LENS

DD3 Diffused Light

9. INDIRECT LENS

UD0 Not required

UD2 Opal

UD3 Asymmetric ¹

¹ Available up to 1000 lm/ft.

10. VOLTAGE

V1 120/277V

V2 240V ¹

V3 347V ²

V4 Low Voltage ³

¹ Not available in North America. ² Only available with DA01 dimming. ³ Only available with DA45 dimming.

11. DIMMING

DA01 0–10V Dimming 1.0%

DA02 0–10V Dimming 0.1% ¹

DA20 DALI Dimming 0.1% ¹

DA21 DALI Dimming 1.0% ¹

DA30 DSI/switchDim ²

DA45 PoE ³

¹ Not available with 347V. ² Not available in North America. ³ Only available with V4.

12. FIXTURE FINISH

FA01 White

FA02 Black Metallic Textured

FA20 Silver Metallic Textured

13. INSIDE TRIM FINISH

FB02 Black Metallic Textured

FB20 Silver Metallic Textured

FB59 Gold Anodized

14. EMERGENCY

E0 Not required

E1 Emergency system - Integral ¹

¹ Available upon request, consult factory. Not available with V3.

15. CIRCUITS

CS1 Single circuit

CS2 Dual circuit

16. SENSORS

Compatible with Avi-On, Casambi, Enlighted, Lutron Vive, nLight, NX Lighting Controls, Osram, Philips, and others. Consult factory.