

# SPECTIVE™ - SUSPENDED

Project Name:


Fixture Type:

Fixture Code:

Quantities:



# SPECTIVE™ - SUSPENDED

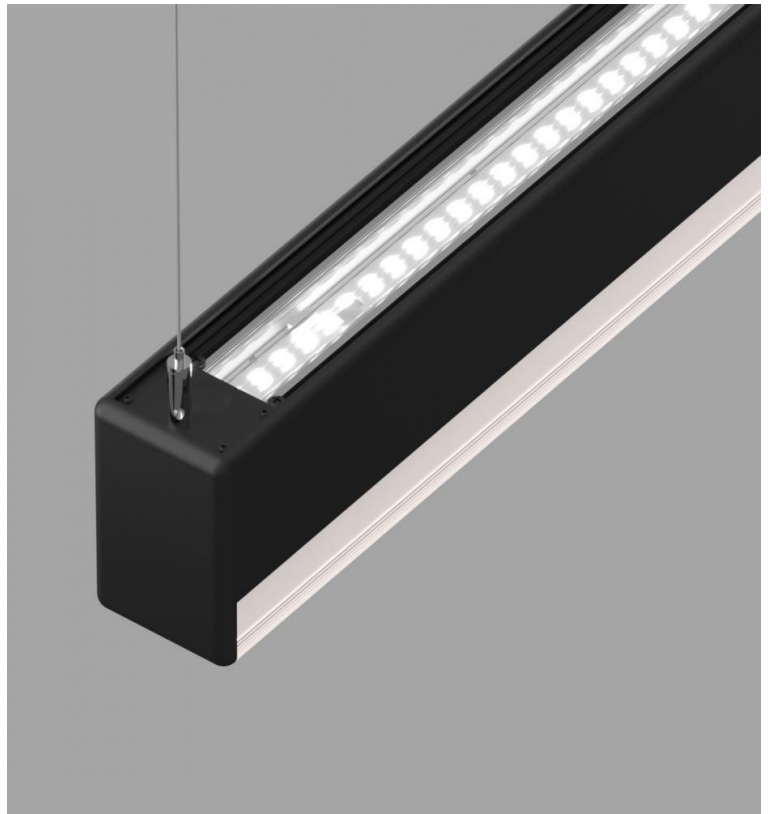

# SPECTIVE™ - SUSPENDED

**SPECTIVE**, a seamless fusion of timeless design and cutting-edge technology. Meticulously designed to emulate the iconic shape of fluorescent tubes, **SPECTIVE** boasts a striking light strip that runs down the center of its diffuser. The diffuser of **SPECTIVE** takes the form of a rail and features an anodized trim in black, gold or silver that appears to draw a graphical line along its profile. The lens texture and shape produce a distinct visual impact, evocative of multiple wave patterns. Completing the visual ensemble are the flawlessly rounded end caps, which embody the **SPECTIVE** design ethos, yielding a versatile and appealing profile from every angle.

## GENERAL SPECIFICATION

### Body

Aluminum.

### Suspension

Steel cables.

### PoE

Can be integrated into your data network via Power over Ethernet (PoE) connectivity.

### Mechanical

Luminaires mount directly over J box (by others).

### Integral Emergency system

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The self contained system includes the inverter module, NiCad batteries, LED charge indicator and test switch (NA only). Not available with a 347V supply.

### Reported L70 @25°C (77°F)

> 60,000 hrs @ 2000 lumens/ft (6000 lumens/m)

### Tunable White

Tunable white available, consult factory.

### Designed by

Serge Cornelissen.

### Finish

Powder coated.

### Power cable

Silver braided.

### Drivers

HPF electronic drivers for 120-277V, 347V (EU-240V). The driver is integral to the fixture housing.

### Diffuser

Opal acrylic.

### Sensors

Compatible with Avi-On, Casambi, Enlighted, Lutron Vive, nLight, NX Lighting Controls, Osram, Philips, and others. Consult factory.

### Estimated L70 @25°C (77°F)

> 165,000 hrs @ 2000 lumens/ft (6000 lumens/m)


### Approvals

Damp Rated.


### Design

US Design Patent Pending.


## MOUNTING & OPTICS




Suspended Direct




Suspended Direct/Indirect




Direct



Indirect UD1



Indirect UD3



Declare



PoE

# SPECTIVE™ - SUSPENDED

## HOW TO ORDER

### A. LUMINAIRE

**SPEC1P** Direct

**SPEC2P** Direct/Indirect

---

All data based on max values, consult Performance Data download for more details.  
One power cord for every 50 linear feet.

### B. LENGTH OF RUN

**SFA\_ \_ \_ \_**

Length of run is 4, 6, 8, 10 or 12ft only, not available as a continuous run.

### C. FIXTURE LENGTH

**SL04** 4ft

**SL06** 6ft

**SL08** 8ft

**SL10** 10ft

**SL12** 12ft

### D. LUMENS/FT DIRECT

**LPF020** 200 lm/ft

**LPF040** 400 lm/ft

**LPF060** 600 lm/ft

### E. LUMENS/FT INDIRECT

**LPG000** Not required

**LPG020** 200 lm/ft

**LPG040** 400 lm/ft

**LPG060** 600 lm/ft

**LPG080** 800 lm/ft

**LPG100** 1000 lm/ft

**LPG120** 1200 lm/ft

**LPG140** 1400 lm/ft

### F. CRI

**CR90** CRI 90+

### G. CCT

**CTA30** 3000K

**CTA35** 3500K

**CTA40** 4000K

### H. DIRECT DIFFUSER

**DD3** Diffused light diffuser

### UPLIGHT DIFFUSER

**UD0** Not required

**UD1** Clear diffuser (Batwing distribution) **UD3** Asymmetric diffuser <sup>1</sup>

---

<sup>1</sup> Available up to 1000 lm/ft.

### UPLIGHT BLACKOUT PLATE

**UB00** Not required

**UB\_ \_** Blackout plate <sup>1</sup>

---

<sup>1</sup> Available on a per foot basis. May be required to prevent lighting up of duct work in loft type applications.

### I. VOLTAGE

**V1** 120/277V

**V2** 240V <sup>1</sup>

**V3** 347V <sup>2</sup>

**V4** Low Voltage <sup>3</sup>

---

<sup>1</sup> Not available in North America.

<sup>2</sup> Only available with DA01 dimming.

<sup>3</sup> Only available with DA45 dimming.



# SPECTIVE™ - SUSPENDED

## J. DIMMING

**DA01** 0-10V Dimming 1.0%  
**DA30** DSI/switchDim<sup>2</sup>

**DA02** 0-10V Dimming 0.1%<sup>1</sup>  
**DA45** PoE<sup>3</sup>

**DA20** DALI Dimming 0.1%<sup>1</sup>

**DA21** DALI Dimming 1.0%<sup>1</sup>

<sup>1</sup> Not available with 347V.

<sup>2</sup> Not available in North America.

<sup>3</sup> Only available with V4.

## K. CEILING TYPE

**H1** Hard ceiling<sup>2</sup>

**H2** Grid ceiling<sup>1</sup>

<sup>1</sup> Combo kit provided includes installation to T-bar and through tile mount.

<sup>2</sup> Designed for drywall ceilings.

## L. SUSPENSION

**HLA03** 3ft cable suspension

**HLA06** 6ft cable suspension

**HLA09** 9ft cable suspension

## M. FIXTURE FINISH

**FA01** White

**FA02** Black Metallic Textured

**FA20** Silver Metallic Textured

## N. INSIDE TRIM FINISH

**FB02** Black Metallic Textured

**FB20** Silver Metallic Textured

**FB59** Gold Anodized

## O. CANOPY FINISH

**CF01** White

**CF02** Black Metallic Textured

**CF20** Silver Metallic Textured

## P. EMERGENCY

**E0** Not required

**E1** Emergency system - Integral<sup>1</sup>

<sup>1</sup> not available with V3.

## Q. CIRCUITS

**CS1** Single circuit

**CS2** Dual circuit

## R. SENSORS

# SPECTIVE™ - SUSPENDED

## TECHNICAL DATA

### LUMINAIRE

All data based on max values, consult Performance Data download for more details.

One power cord for every 50 linear feet.


Code	SPEC1P	SPEC2P
Light Direction	Direct	Direct/Indirect

---

### FIXTURE FINISH



White



Black Metallic Textured




Silver Metallic Textured

### INSIDE TRIM FINISH



Black Metallic Textured



Silver Metallic Textured




Gold Anodized

### CANOPY FINISH



White



Black Metallic Textured



Silver Metallic Textured

### APPROVALS



DAMP  
LOCATION



IP20



# SPECTIVE™ - SUSPENDED


## PERFORMANCE DATA

### DIRECT DIFFUSED (DD3)

#### LUMEN/FT

#### WATT/FT

#### LPW

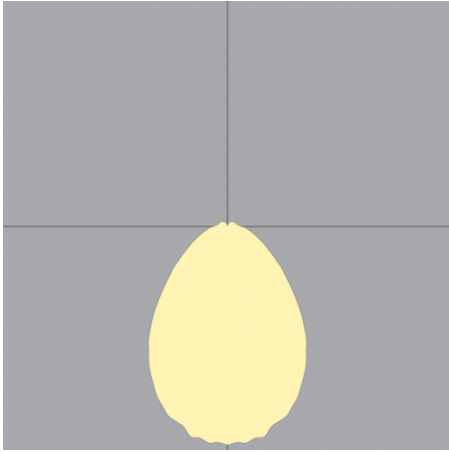

600  
400  
200

6  
4  
2


104  
109  
116

### INDIRECT BATWING (UD1)

#### LUMEN/FT

#### WATT/FT

#### LPW

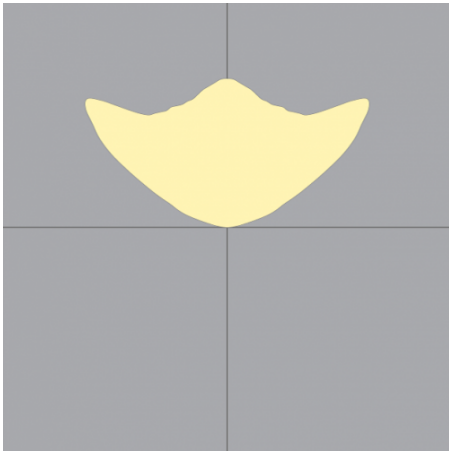

1400  
1200  
1000  
800  
600  
400  
200

12  
10  
8  
6  
5  
3  
2


116  
119  
122  
127  
131  
137  
144

### INDIRECT ASYMMETRIC (UD3)

#### LUMEN/FT

#### WATT/FT

#### LPW

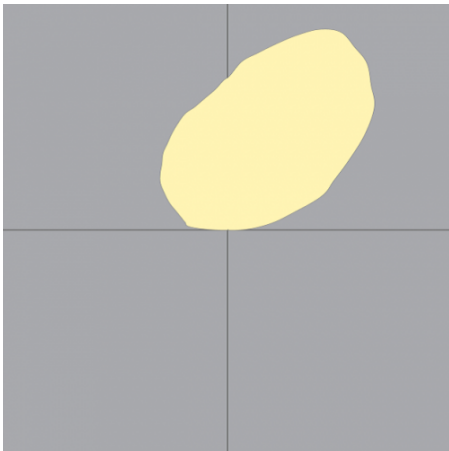

1000  
800  
600  
400  
200


12  
10  
6  
5  
2

82  
85  
89  
92  
96




# SPECTIVE™ - SUSPENDED

## DIMENSIONAL DIAGRAMS

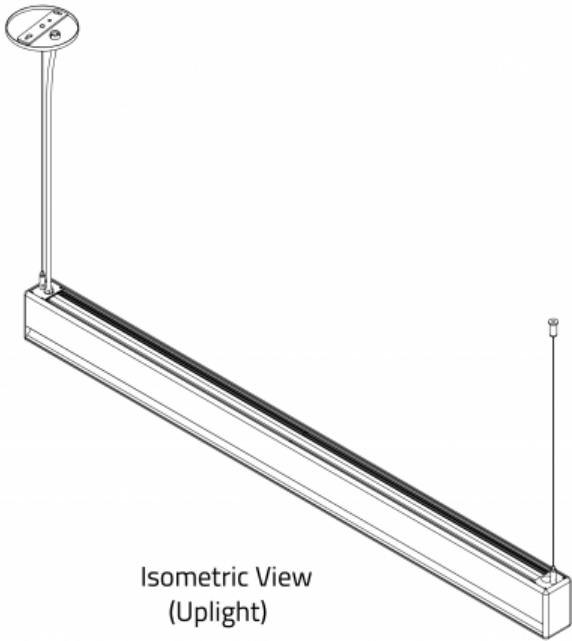


Isometric View (Uplight)

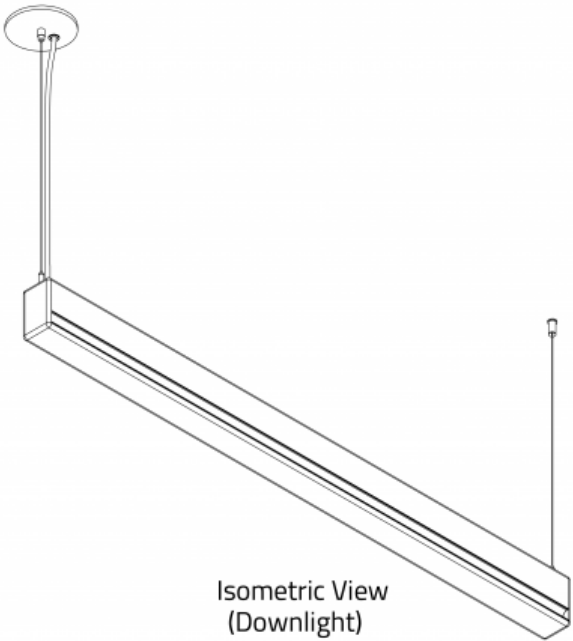

Isometric View (Downlight)



Top View (Uplight)

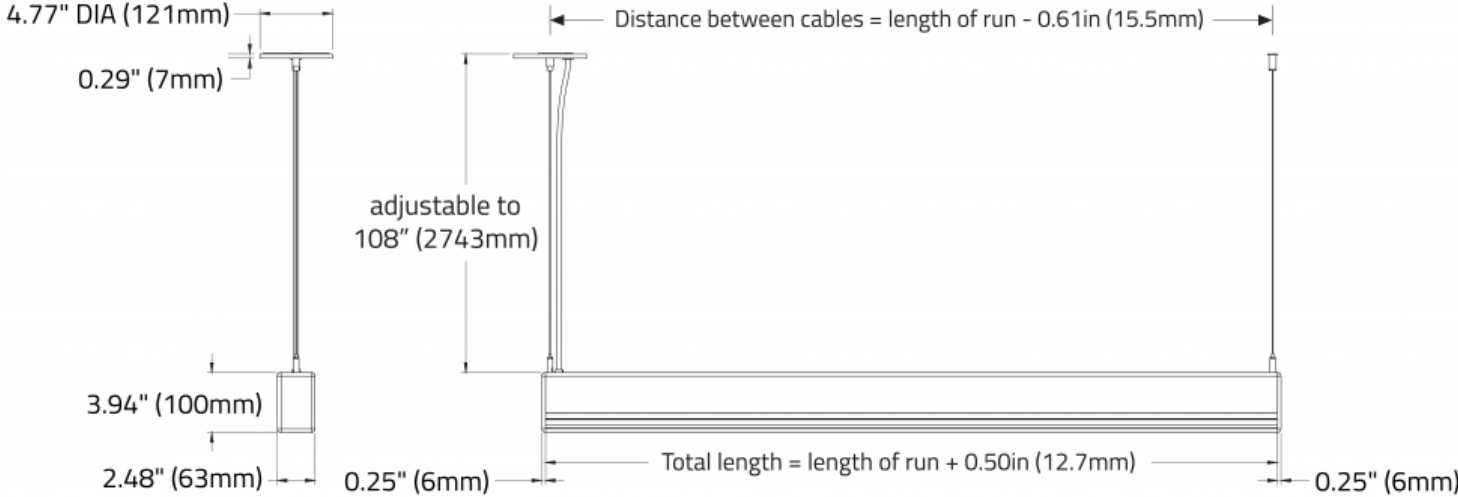

Bottom View (Downlight)