SPIA™ - WALL RECESSED EXTERIOR

Project Name:

Fixture Type:

Fixture Code:

Quantities:

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

SPIA™ - WALL RECESSED EXTERIOR

GENERAL SPECIFICATION

Housing
Low copper, die-cast aluminum highly resistant to oxidation.

Lens
5mm/0.2" tempered glass.

Gasket
Silicone.

Finish
Powder coated.

Reflectors
High purity aluminum.

External screws
A4 stainless steel treated with highly antioxidant water-repellent lubricating solution to ensure easy opening.


Cable entry
Type A, M16 gland for DIA 5-10mm/0.22-0.4" cables. Type B, Double silicon cable gland for DIA 10-14mm/0.4-0.5" cables.

Drivers
HPF, electronic 120-277V.

Rough-in housing
Thermoplastic.

Mechanical
For wall installation in poured concrete/brick.

OPTICS & FEATURES



Ext-Wall Recessed

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

SPIA™ - WALL RECESSED EXTERIOR

HOW TO ORDER

A. LUMINAIRE

8207410 8207410

8207412 8207412

8207414 8207414

8207416 8207416

B. CCT

30 3000K (min 80 CRI)

40 4000K (min 80 CRI)

C. FINISH

BL Black

AG Anthracite Gray

GR Light Gray

D. OPTIONS

DB Dimming (Trailing Edge, 120V only)

TF Turtle Friendly Amber LEDs (0.35 of 3000K lms)

SC Second Cable Entry

E. ROUGH-IN HOUSING (REQUIRED)

RIH5297 Rough-In Housing (Types A & B)

RIH5301 Rough-In Housing (Types C & D)

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

SPIA™ - WALL RECESSED EXTERIOR

TECHNICAL DATA

LUMINAIRE

Code	8207410	8207412	8207414	8207416
Power	1W Half Lourver	1W Full Lourver	3W Half Lourver	3W Full Lourver
Initial Lumens	75lm	75lm	225lm	225lm
Dimensions	Type A	Type B	Type C	Type D


APPROVALS




© 2026 Beta-Calco Inc. Specifications are subject to change without notice


SPIA™ - WALL RECESSED EXTERIOR


DIMENSIONAL DIAGRAMS

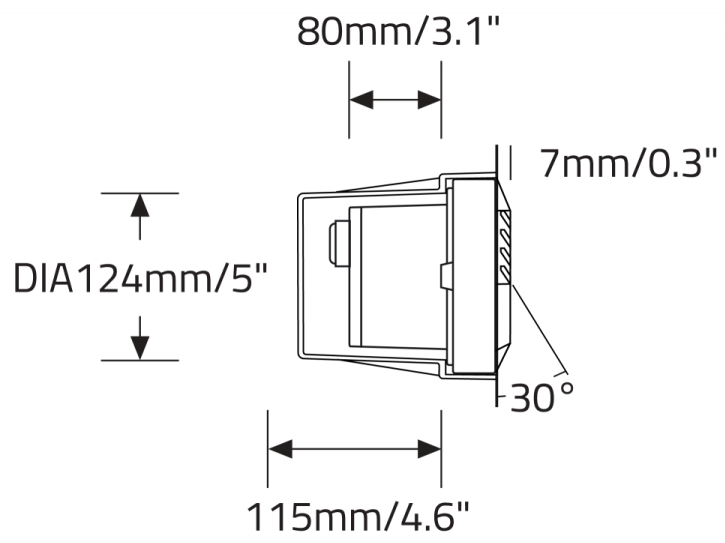

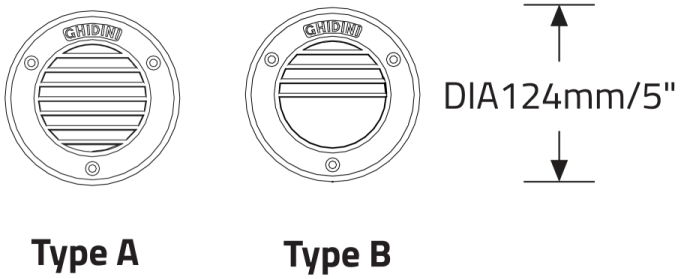

Type A **Type B**

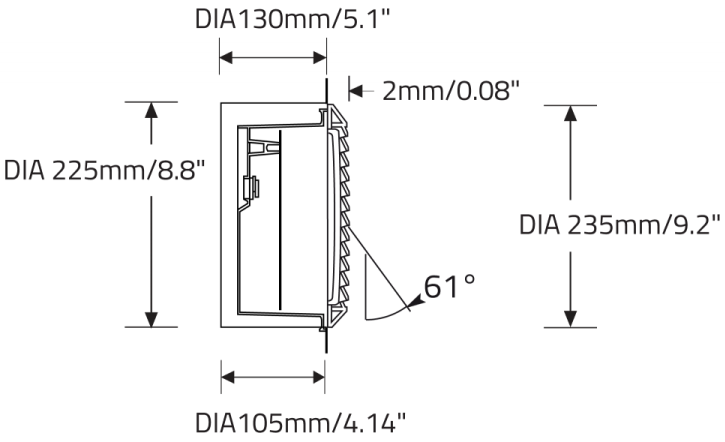

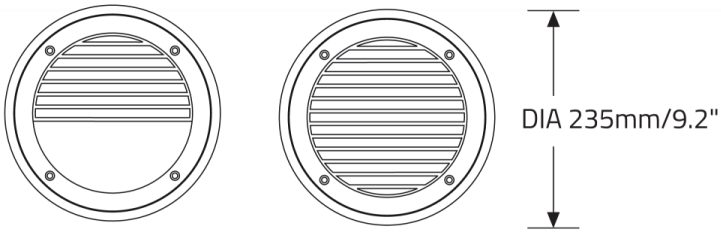

Type C **Type D**

© 2026 Beta-Calco Inc. Specifications are subject to change without notice