


STARBURST RD™ - SUSPENDED

Project Name:	Fixture Type:
Fixture Code:	Quantities:



STARBURST RD™ - SUSPENDED

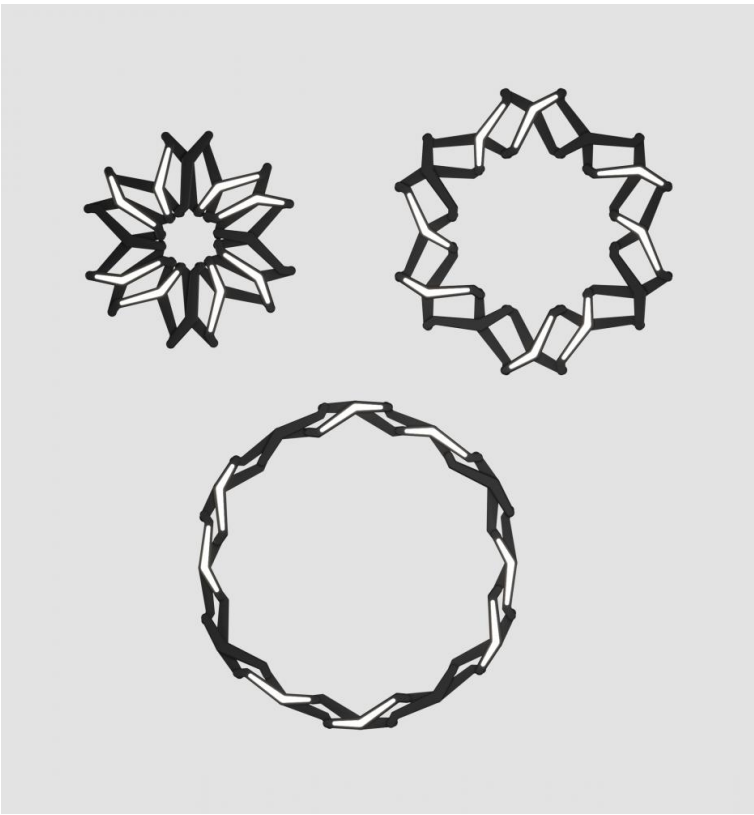

STARBURST RD™ - SUSPENDED

STARBURST is a collection of kinetic pendants that when in compact form are semblant of stars which can then manually expand into a larger circle, triangle, or quad. Starburst can adapt to either organic or cosmic interior designs. The overlapping and interlacing of multiple brackets create contours that resemble elements of nature and can evoke feelings of well-being and positivity. The angularity of the brackets and diffusers complement futuristic themes that communicate innovation, high-tech, and the avant-garde. As a single pendant, Starburst acts as an illuminated art piece. When multiplied and layered, a celestial effect is created. To learn more watch the Deep Dive in image gallery.

GENERAL SPECIFICATION

Body and Trim

Die-cast aluminum.

Suspension

Power over cable.

Remote emergency system

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The self contained system includes the inverter module, NiCad batteries, LED charge indicator and test switch (NA only). Not available with a 347V supply.

Mechanical

Mounts directly over a 4" electrical junction box (by others - North America only).

Sensors

Consult factory regarding sensor compatibility.

Estimated L70 @25°C (77°F)

> 235,000 hrs.

Approvals

Damp Rated.

Design

US Pat. No. D882,862.

US Pat. No. D895,196, D893,796 and D894,474

Finish

Powder coated.

Lens

Acrylic.

Remote mounting of drivers

Wire Size 18 AWG - Max distance (from canopy to drivers) 9.5' (3m), Wire size 16 AWG - Max distance 19.5' (6m), Wire size 14 AWG - Max distance 29.5' (9m). Drivers must be accessible after installation. For longer remote distances, consult factory.

Drivers

Remote, HPF electronic for 120-277V, (EU-240V).

Reported L70 @25°C (77°F)

> 102,000 hrs.

Delivered lumens

Delivered lumens & LPW based on 4000K CRI 90+.


Designed by

Jacob Antoni


Seismic Bracing

Seismic bracing kits are available to meet compliance requirements. Consult the factory for details.

OPTICS & FEATURES



Suspended Direct



Suspended Direct/Indirect



Declare



STARBURST RD™ - SUSPENDED

HOW TO ORDER

A. LUMINAIRE

STRR1P01 Direct, 7700 lms, 54 LPW

STRR2P01 Direct/Indirect, 12800 lms, 54 LPW

B. CRI

CR90 CRI 90+

C. CCT

CTA30 3000K

CTA35 3500K

CTA40 4000K

D. VOLTAGE

V1 120/277V

V2 240V ¹

V3 347V ²

¹ Not available in North America.
² Only available with DA01.

E. DIMMING

DA01 0-10V Dimming 1.0%
DA30 DSI/switchDim ²

DA02 0-10V Dimming 0.1% ¹

DA20 DALI Dimming 0.1% ¹

DA21 DALI Dimming 1.0% ¹

¹ Not available with V3.
² Not available in North America.

F. FINISH

FA01 White
FA27 Wood grain - Light Cherry ¹
FA45 Copper Metallic
FA53 Red Metallic - Textured

FA02 Black Metallic - Textured
FA28 Wood grain - Dark Walnut ¹
FA46 Charcoal Metallic - Textured

FA20 Silver Metallic - Textured
FA30 Wood grain - White Oak ¹
FA47 Bronze Metallic - Textured

FA25 Gold Metallic - Textured
FA44 Midnight Blue Metallic - Textured
FA52 Champagne Metallic

¹ Wood grain finishes may incur longer lead times and setup charges. Consult factory for details.

G. CANOPY FINISH

CF01 White
CF44 Midnight Blue Metallic - Textured
CF52 Champagne Metallic

CF02 Black Metallic - Textured
CF45 Copper Metallic
CF53 Red Metallic - Textured

CF20 Silver Metallic - Textured
CF46 Charcoal Metallic - Textured

CF25 Gold Metallic - Textured
CF47 Bronze Metallic - Textured

H. CIRCUITS

CS1 Single circuit

CS2 Dual circuit

I. EMERGENCY

E0 Not required

E2 Emergency system - Remote














STARBURST RD™ - SUSPENDED

TECHNICAL DATA

LUMINAIRE











Code	STRR1P01	STRR2P01
Light Direction	Direct	Direct/Indirect
Delivered lms	7700	12800
LPW	54	54

FINISH FIXTURE

							
White	Black Metallic - Textured	Silver Metallic - Textured	Gold Metallic - Textured	Wood grain - Light Cherry ¹	Wood grain - Dark Walnut ¹	Wood grain - White Oak ¹	Midnight Blue Metallic - Textured
							
Copper Metallic	Charcoal Metallic - Textured	Bronze Metallic - Textured	Champagne Metallic	Red Metallic - Textured			

¹ Wood grain finishes may incur longer lead times and setup charges. Consult factory for details.

FINISH CANOPY

							
White	Black Metallic - Textured	Silver Metallic - Textured	Gold Metallic - Textured	Midnight Blue Metallic - Textured	Copper Metallic	Charcoal Metallic - Textured	Bronze Metallic - Textured
							
Champagne Metallic	Red Metallic - Textured						





APPROVALS



STARBURST RD™ - SUSPENDED





DIMENSIONAL DIAGRAMS

COLLAPSED

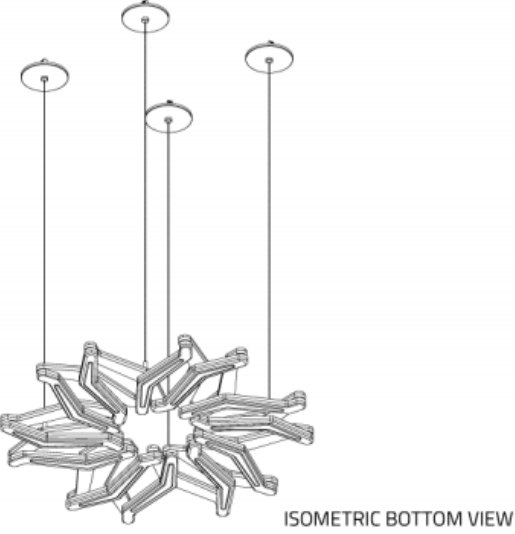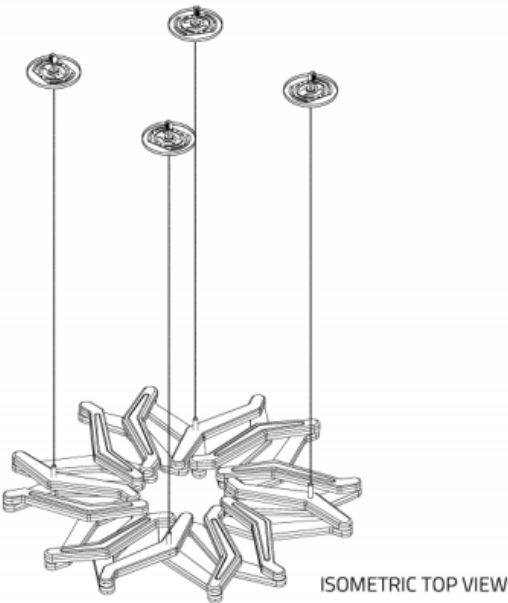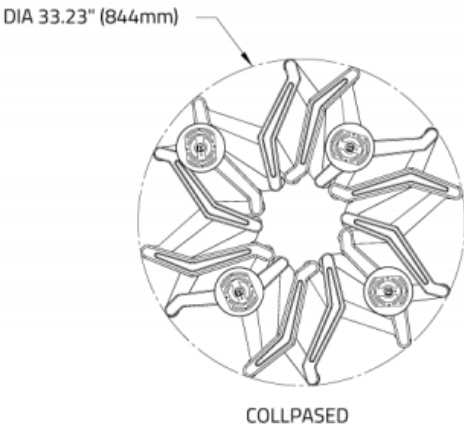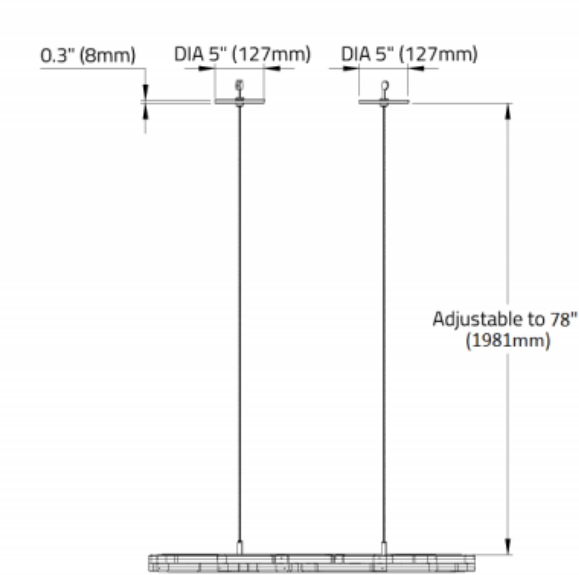

STARBURST RD™ - SUSPENDED

PARTIAL EXPANSION

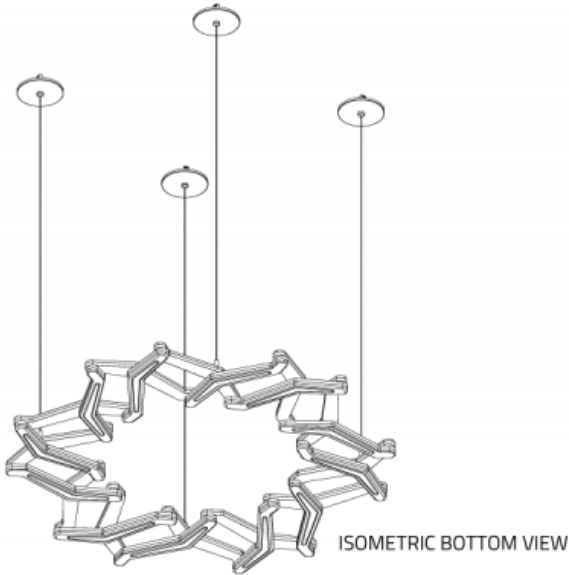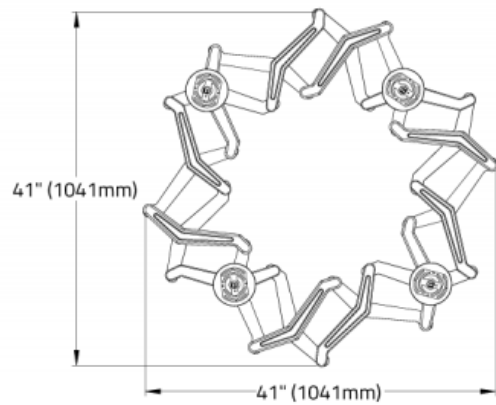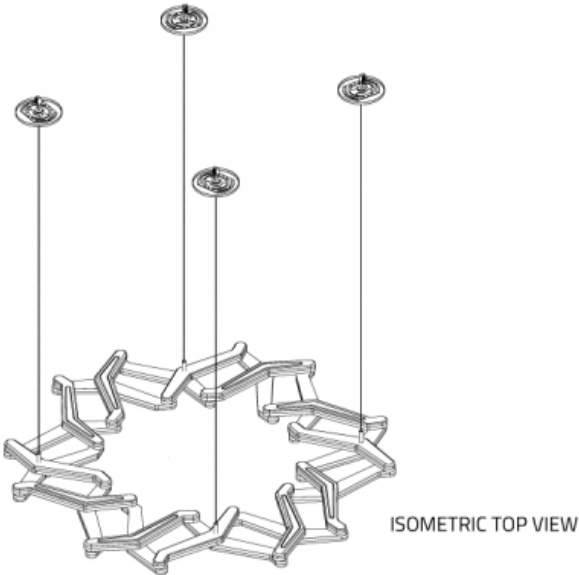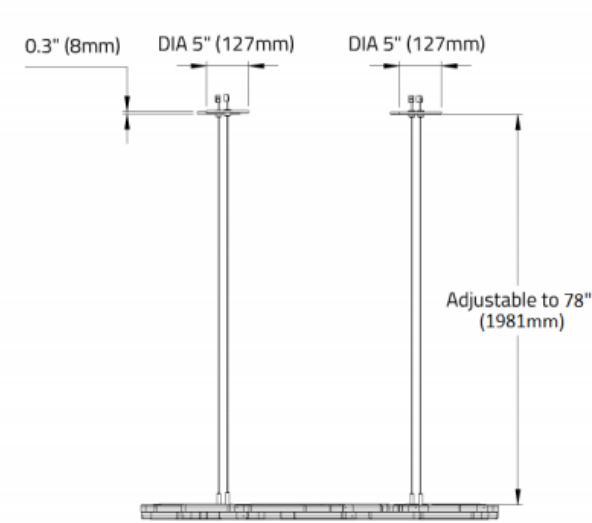

STARBURST RD™ - SUSPENDED

FULLY EXPANDED

