


Project Name: Fixture Type:

Fixture Code: Quantities:



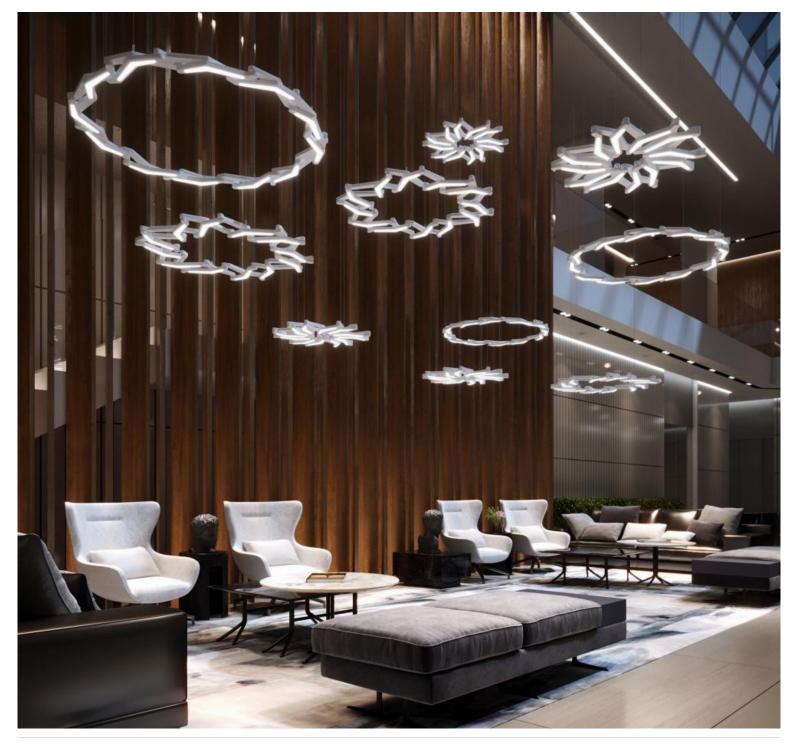

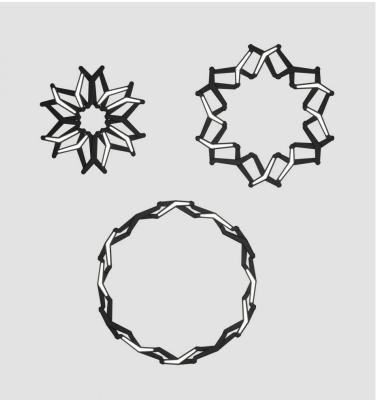

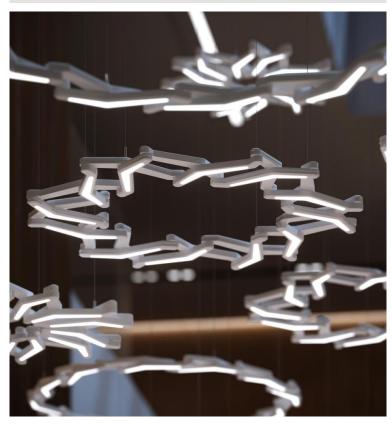



Starburst is a collection of kinetic pendants that when in compact form are semblant of stars which can then manually expand into a larger circle, triangle, or quad. Starburst can adapt to either organic or cosmic interior designs. The overlapping and interlacing of multiple brackets create contours that resemble elements of nature and can evoke feelings of well-being and positivity. The angularity of the brackets and diffusers complement futuristic themes that communicate innovation, high-tech, and the avant-garde. As a single pendant, Starburst acts as an illuminated art piece. When multiplied and layered, a celestial effect is created. To learn more watch the Deep Dive in image gallery.

#### **GENERAL SPECIFICATION**

#### **Body and Trim**

Die-cast aluminum.

#### Suspension

Power over cable.

### Remote emergency system

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The self contained system includes the inverter module, NiCad batteries, LED charge indicator and test switch (NA only). Not available with a 347V supply.

#### Mechanical

Mounts directly over a 4" electrical junction box (by others - North America only).

#### Sensors

Consult factory regarding sensor compatibility.

### Estimated L70 @25°C (77°F)

> 235,000 hrs.

## **Approvals**

Damp Rated.

#### Design

US Pat. No. D882,862.

US Pat. No. D895,196, D893,796 and D894,474

#### **Finish**

Powder coated.

#### Lens

Acrylic.

#### Remote mounting of drivers

Wire Size 18 AWG - Max distance (from canopy to drivers) 9.5' (3m), Wire size 16 AWG - Max distance 19.5' (6m), Wire size 14 AWG - Max distance 29.5' (9m). Drivers must be accessible after installation.

#### **Drivers**

Remote, HPF electronic for 120-277V, (EU-240V).

## Reported L70 @25°C (77°F)

> 102,000 hrs.

## **Delivered lumens**

Delivered lumens & LPW based on 4000K CRI 90+.

### Designed by

Jacob Antoni

#### Seismic Bracing

Seismic bracing kits are available to meet compliance requirements. Consult the factory for details.

### **OPTICS & FEATURES**







Suspended Direct Suspended Direct/Indirect

Declare

## **HOW TO ORDER**

### A. LUMINAIRE

**STRR1P01** Direct, 7700 lms, 54 LPW **STRR2P01** Direct/Indirect, 12800 lms,

54 LPW

B. CRI

CR90 CRI 90+

C. CCT

**CTA30** 3000K **CTA35** 3500K **CTA40** 4000K

**D. VOLTAGE** 

**V1** 120/277V **V2** 240V <sup>1</sup> **V3** 347V <sup>2</sup>

### E. DIMMING

**DA01** 0-10V Dimming 1.0% **DA02** 0-10V Dimming 0.1% <sup>1</sup> **DA20** DALI Dimming 0.1% <sup>1</sup> **DA21** DALI Dimming 1.0% <sup>1</sup>

**DA30** DSI/switchDim <sup>2</sup>

### F. FINISH

**FA01** White **FA27** Wood grain - Light Cherry <sup>1</sup>

**FA45** Copper Metallic

FA53 Red Metallic - Textured

**FA02** Black Metallic - Textured **FA28** Wood grain - Dark Walnut <sup>1</sup>

FA46 Charcoal Metallic - Textured

**FA20** Silver Metallic - Textured **FA30** Wood grain - White Oak <sup>1</sup>

FA47 Bronze Metallic - Textured

FA25 Gold Metallic - Textured

FA44 Midnight Blue Metallic - Textured

FA52 Champagne Metallic

## **G. CANOPY FINISH**

CF01 White CF02 Black

**CF44** Midnight Blue Metallic - Textured

**CF52** Champagne Metallic

CF02 Black Metallic - Textured

**CF45** Copper Metallic

CF53 Red Metallic - Textured

**CF20** Silver Metallic - Textured **CF46** Charcoal Metallic - Textured

**CF25** Gold Metallic - Textured **CF47** Bronze Metallic - Textured

## **H. CIRCUITS**

CS1 Single circuit CS2 Dual circuit

## I. EMERGENCY

**E0** Not required **E2** Emergency system - Remote

<sup>&</sup>lt;sup>1</sup> Not available in North America.

<sup>&</sup>lt;sup>2</sup> Only available with DA01.

<sup>&</sup>lt;sup>1</sup> Not available with V3.

<sup>&</sup>lt;sup>2</sup> Not available in North America.


<sup>&</sup>lt;sup>1</sup> Wood grain finishes may incur longer lead times and setup charges. Consult factory for details.

## **TECHNICAL DATA**

### **LUMINAIRE**

STRR1P01 STRR2P01 Code **Light Direction** Direct Direct/Indirect **Delivered Ims** 7700 12800 LPW 54 54

## **FINISH FIXTURE**

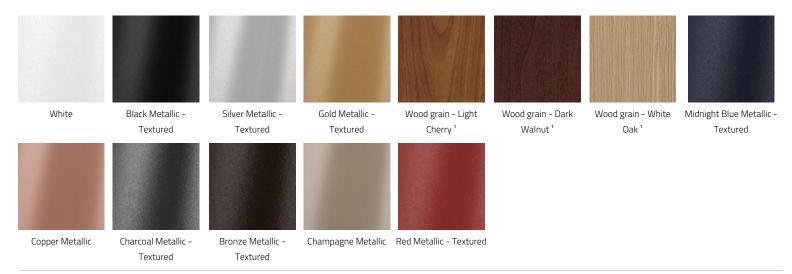

<sup>&</sup>lt;sup>1</sup> Wood grain finishes may incur longer lead times and setup charges. Consult factory for details.

## **FINISH CANOPY**



# **APPROVALS**














# **DIMENSIONAL DIAGRAMS**

COLLAPSED

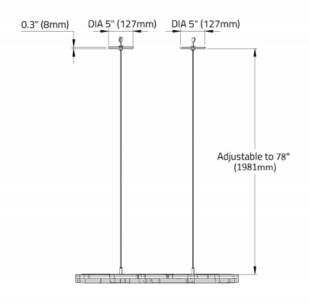


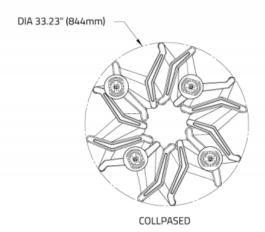





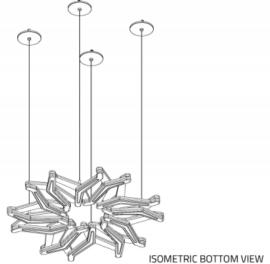


## PARTIAL EXPANSION

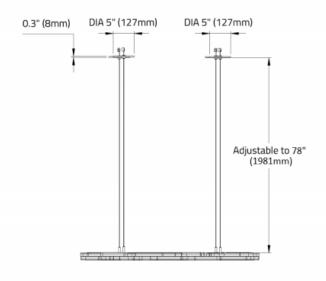

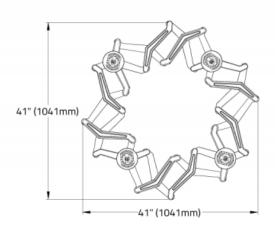

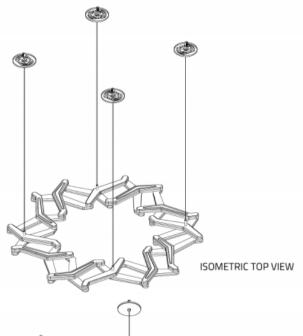

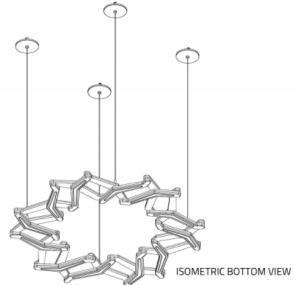

# FULLY EXPANDED

