




# STARBURST TRI™

## FULL SPECIFICATION SHEET

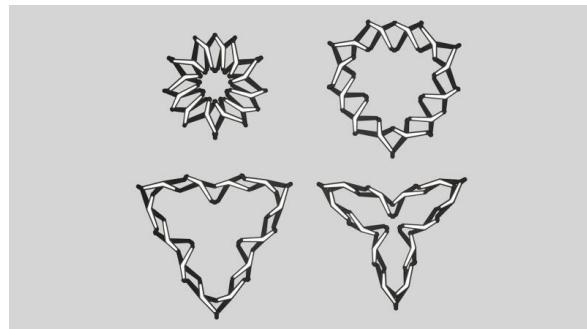

Fixture Type



Fixture Code




Quantities

### 1 DESCRIPTION

**STARBURST** is a collection of kinetic pendants that when in compact form are semblant of stars which can then manually expand into a larger circle, triangle, or quad. Starburst can adapt to either organic or cosmic interior designs. The overlapping and interlacing of multiple brackets create contours that resemble elements of nature and can evoke feelings of well-being and positivity. The angularity of the brackets and diffusers complement futuristic themes that communicate innovation, high-tech, and the avant-garde. As a single pendant, Starburst acts as an illuminated art piece. When multiplied and layered, a celestial effect is created. To learn more watch the Deep Dive in image gallery.

### 2 OPTICS & FEATURES

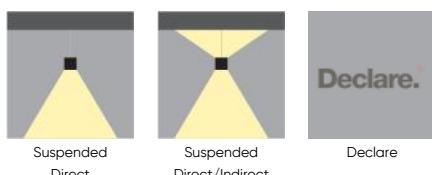

Suspended  
Direct

Suspended  
Direct/Indirect

Declare.

### 3 APPROVALS



### 4 GENERAL SPECIFICATION

#### BODY AND TRIM

Die-cast aluminum.

#### FINISH

Powder coated.

**SUSPENSION**

Power over cable.

**REMOTE EMERGENCY SYSTEM**

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The self contained system includes the inverter module, NiCad batteries, LED charge indicator and test switch (NA only). Not available with a 347V supply.

**MECHANICAL**

Mounts directly over a 4" electrical junction box (by others - North America only).

**SENSORS**

Consult factory regarding sensor compatibility.

**ESTIMATED L70 @25°C (77°F)**

> 235,000 hrs.

**APPROVALS**

Damp Rated.

**DESIGN**

US Pat. No. D882,862.

US Pat. No. D895,196, D893,796 and D894,474

**LENS**

Acrylic.

**REMOTE MOUNTING OF DRIVERS**

Wire Size 18 AWG - Max distance (from canopy to drivers) 9.5' (3m), Wire size 16 AWG - Max distance 19.5' (6m), Wire size 14 AWG - Max distance 29.5' (9m). Drivers must be accessible after installation. For longer remote distances, consult factory.

**DRIVERS**

Remote, HPF electronic for 120-277V, (EU-240V).

**REPORTED L70 @25°C (77°F)**

> 102,000 hrs.

**DELIVERED LUMENS**

Delivered lumens & LPW based on 4000K CRI 90+.

**DESIGNED BY**


Jacob Antoni

**SEISMIC BRACING**

Seismic bracing kits are available to meet compliance requirements. Consult the factory for details.

**5 DESIGN OPTIONS****FINISH FIXTURE**

<sup>1</sup> Wood grain finishes may incur longer lead times and setup charges. Consult factory for details.

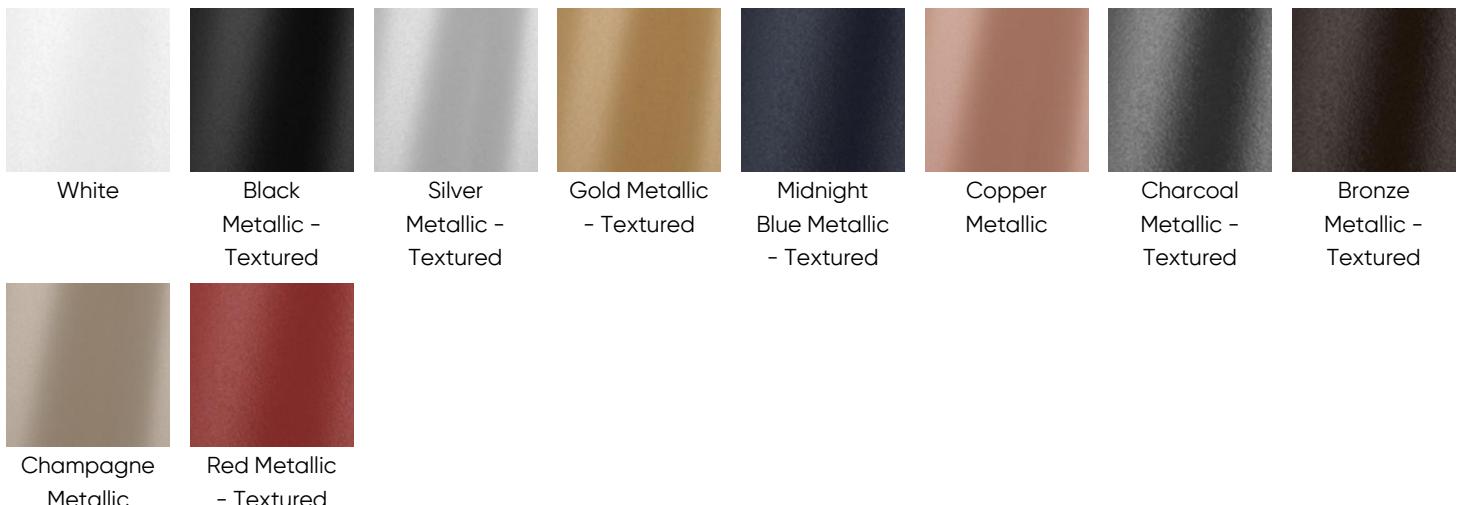**FINISH CANOPY****6 HOW TO ORDER****1. LUMINAIRE**

**STR1P01** Direct, 7700 lms, 54 LPW      **STR2P01** Direct/Indirect, 12800 lms, 54 LPW

## 2. CRI

**CR90** CRI 90+

## 3. CCT

**CTA30** 3000K

**CTA35** 3500K

**CTA40** 4000K

## 4. VOLTAGE

**V1** 120/277V

**V2** 240V <sup>1</sup>

**V3** 347V <sup>2</sup>

<sup>1</sup> Not available in North America. <sup>2</sup> Only available with DA01.

## 5. DIMMING

**DA01** 0-10V Dimming 1.0%

**DA02** 0-10V Dimming 0.1% <sup>1</sup>

**DA20** DALI Dimming 0.1% <sup>1</sup>

**DA21** DALI Dimming 1.0% <sup>1</sup>

**DA30** DSI/switchDim <sup>2</sup>

<sup>1</sup> Not available with V3. <sup>2</sup> Not available in North America.

## 6. FINISH

**FA01** White

**FA02** Black Metallic - Textured

**FA20** Silver Metallic - Textured

**FA25** Gold Metallic - Textured

**FA27** Wood grain - Light Cherry <sup>1</sup>

**FA28** Wood grain - Dark Walnut <sup>1</sup>

**FA30** Wood grain - White Oak <sup>1</sup>

**FA44** Midnight Blue Metallic -  
Textured

**FA45** Copper Metallic

**FA46** Charcoal Metallic -  
Textured

**FA47** Bronze Metallic - Textured

**FA52** Champagne Metallic

**FA53** Red Metallic - Textured

<sup>1</sup> Wood grain finishes may incur longer lead times and setup charges. Consult factory for details.

## 7. CANOPY FINISH

**CF01** White

**CF02** Black Metallic - Textured

**CF20** Silver Metallic - Textured

**CF25** Gold Metallic - Textured

**CF44** Midnight Blue Metallic -  
Textured

**CF45** Copper Metallic

**CF46** Charcoal Metallic -  
Textured

**CF47** Bronze Metallic - Textured

**CF52** Champagne Metallic

**CF53** Red Metallic - Textured

## 8. CIRCUITS

**CS1** Single circuit

**CS2** Dual circuit

## 9. EMERGENCY

**E0** Not required

**E2** Emergency system - Remote




7 TECHNICAL DATA

**LUMINAIRE**




Code	STR1P01	STR2P01
<b>Light Direction</b>	Direct	Direct/Indirect
<b>Delivered lms</b>	7700	12800
<b>LPW</b>	54	54

8 DIMENSIONAL DIAGRAMS

COLLAPSED


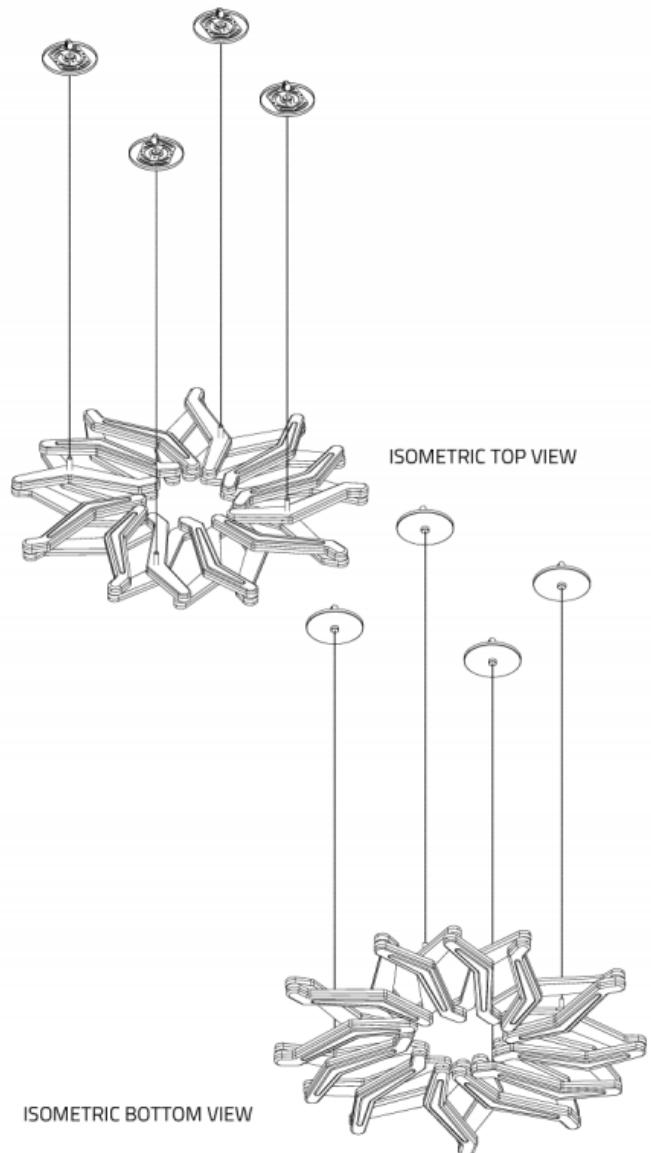
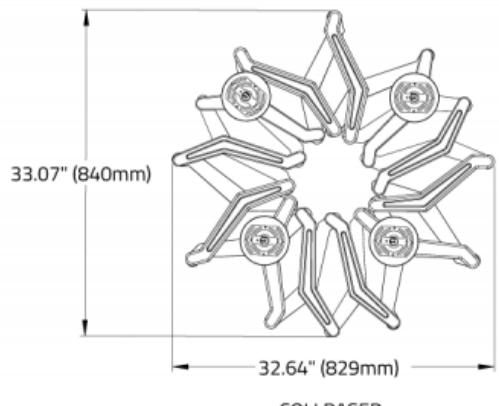
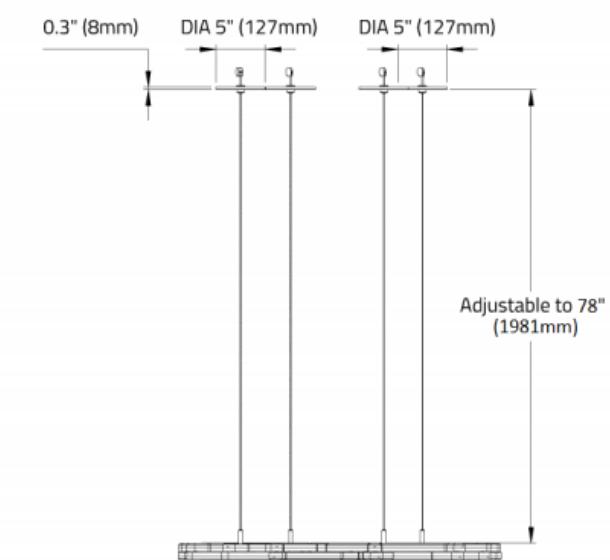


PARTIAL EXPANSION

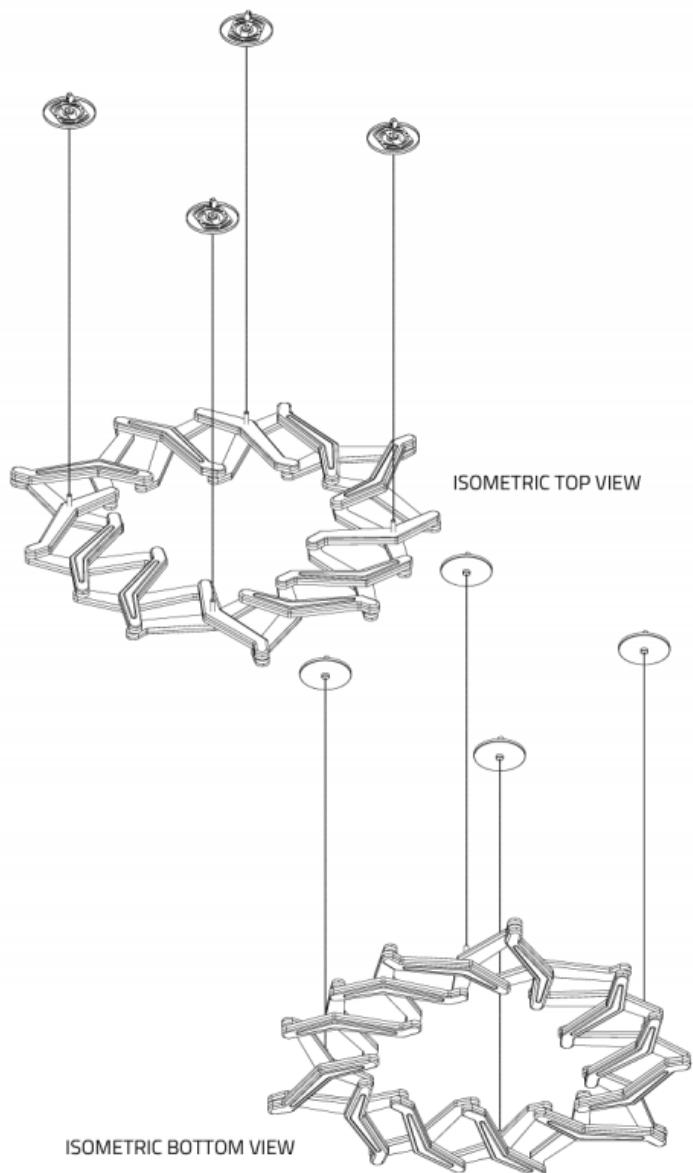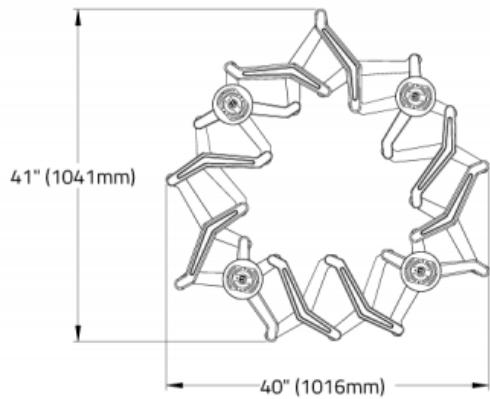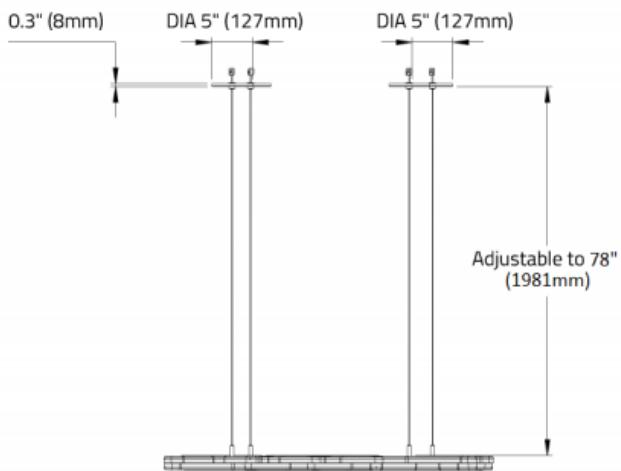

# STARBURST TRI™ - SUSPENDED FULL SPECIFICATION SHEET

## EXPANDED (TRIANGLE)

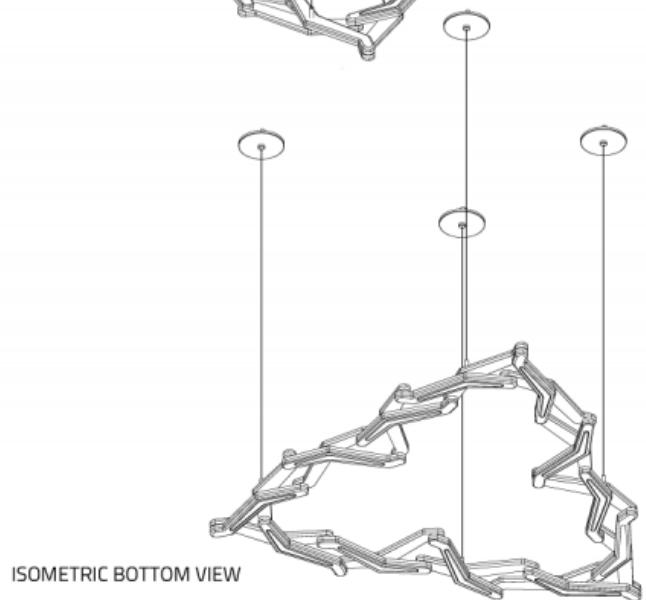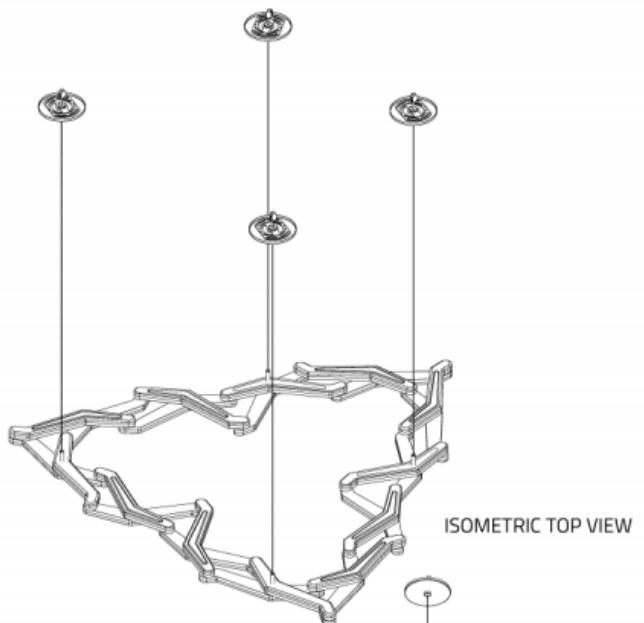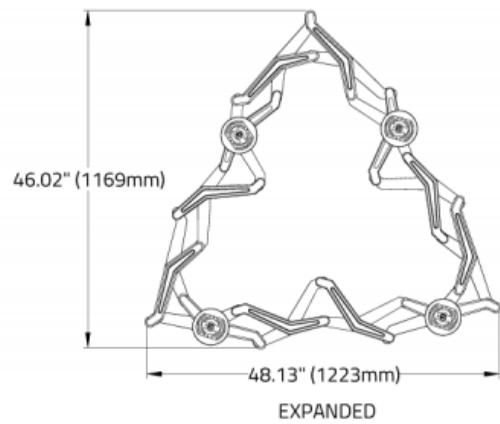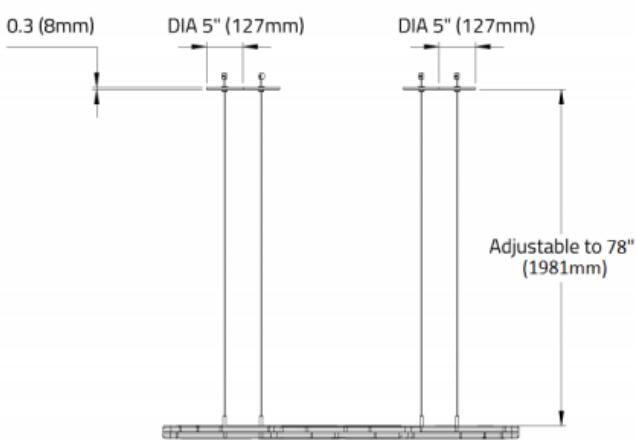

# STARBURST TRI™ - SUSPENDED FULL SPECIFICATION SHEET

## HYPER EXPANDED (TRILLIUM)

