



STARBURST TRI™ - SUSPENDED

Project Name:	Fixture Type:
Fixture Code:	Quantities:

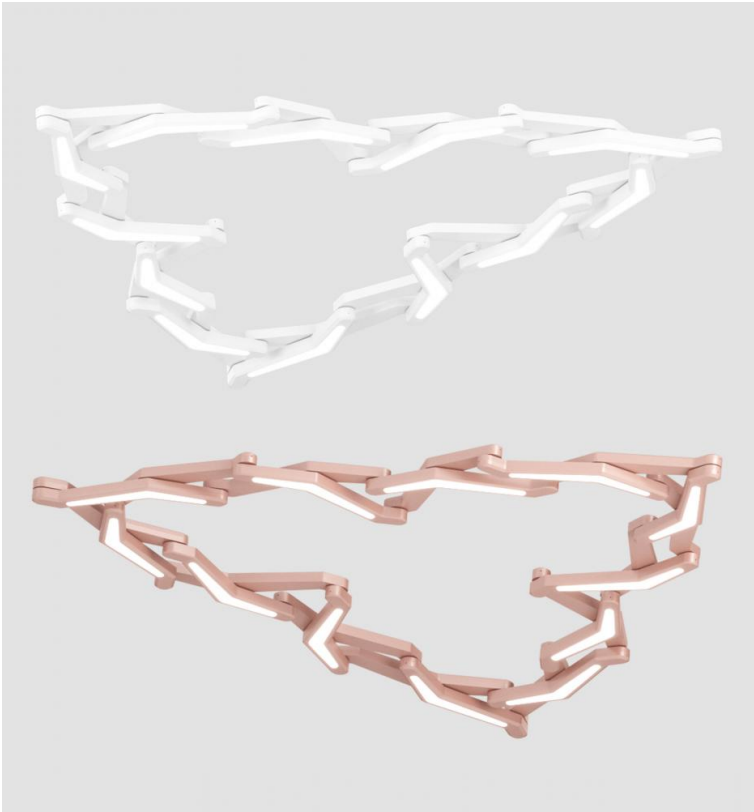

STARBURST TRI™ - SUSPENDED

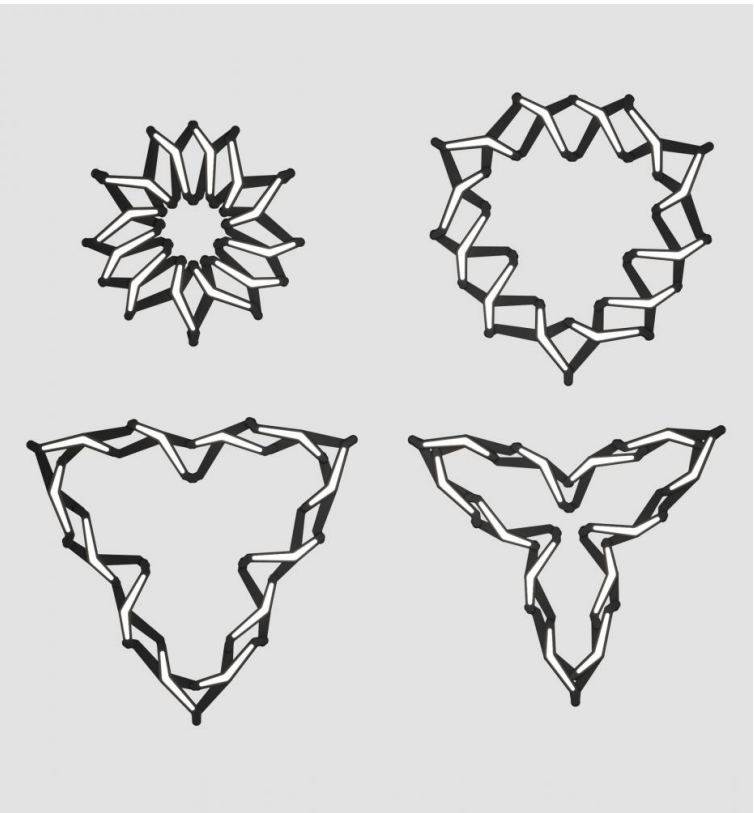

STARBURST TRI™ - SUSPENDED

Starburst is a collection of kinetic pendants that when in compact form are semblant of stars which can then manually expand into a larger circle, triangle, or quad. Starburst can adapt to either organic or cosmic interior designs. The overlapping and interlacing of multiple brackets create contours that resemble elements of nature and can evoke feelings of well-being and positivity. The angularity of the brackets and diffusers complement futuristic themes that communicate innovation, high-tech, and the avant-garde. As a single pendant, Starburst acts as an illuminated art piece. When multiplied and layered, a celestial effect is created. To learn more watch the Deep Dive in image gallery.

GENERAL SPECIFICATION

Body and Trim

Die-cast aluminum.

Suspension

Power over cable.

Remote emergency system

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The self contained system includes the inverter module, NiCad batteries, LED charge indicator and test switch (NA only). Not available with a 347V supply.

Mechanical

Mounts directly over a 4" electrical junction box (by others - North America only).

Sensors

Consult factory regarding sensor compatibility.

Estimated L70 @25°C (77°F)

> 235,000 hrs.

Approvals

Damp Rated.

Design

US Pat. No. D882,862.

US Pat. No. D895,196, D893,796 and D894,474

Finish

Powder coated.

Diffuser

Acrylic.

Remote mounting of drivers

Wire Size 18 AWG - Max distance (from canopy to drivers) 9.5' (3m), Wire size 16 AWG - Max distance 19.5' (6m), Wire size 14 AWG - Max distance 29.5' (9m). Drivers must be accessible after installation.

Drivers

Remote, HPF electronic for 120-277V, (EU-240V).

Reported L70 @25°C (77°F)

> 102,000 hrs.

Delivered lumens

Delivered lumens & LPW based on 4000K CRI 90+.


Designed by

Jacob Antoni


Seismic Bracing

Seismic bracing kits are available to meet compliance requirements. Consult the factory for details.

OPTICS & FEATURES



Suspended Direct



Suspended Direct/Indirect



Declare



STARBURST TRI™ - SUSPENDED

HOW TO ORDER

A. LUMINAIRE

STRT1P01 Direct, 7700 lms, 54 LPW **STRT2P01** Direct/Indirect, 12800 lms, 54 LPW

B. CRI

CR90 CRI 90+

C. CCT

CTA30 3000K **CTA35** 3500K **CTA40** 4000K

D. VOLTAGE

V1 120/277V **V2** 240V ¹ **V3** 347V ²

¹ Not available in North America.
² Only available with DA01.

E. DIMMING

DA01 0-10V Dimming 1.0% **DA02** 0-10V Dimming 0.1% ¹ **DA20** DALI Dimming 0.1% ¹ **DA21** DALI Dimming 1.0% ¹
DA30 DSI/switchDim ²

¹ Not available with V3.
² Not available in North America.

F. FINISH

FA01 White **FA02** Black Metallic - Textured **FA20** Silver Metallic - Textured **FA25** Gold Metallic - Textured
FA27 Wood grain - Light Cherry ¹ **FA28** Wood grain - Dark Walnut ¹ **FA44** Midnight Blue Metallic - Textured **FA45** Copper Metallic
FA46 Charcoal Metallic - Textured **FA47** Bronze Metallic - Textured **FA52** Champagne Metallic **FA53** Red Metallic - Textured

¹ Longer than normal lead times may apply, consult factory.

G. CANOPY FINISH

CF01 White **CF02** Black Metallic - Textured **CF20** Silver Metallic - Textured **CF25** Gold Metallic - Textured
CF44 Midnight Blue Metallic - Textured **CF45** Copper Metallic **CF46** Charcoal Metallic - Textured **CF47** Bronze Metallic - Textured
CF52 Champagne Metallic **CF53** Red Metallic - Textured

H. CIRCUITS

CS1 Single circuit **CS2** Dual circuit

I. EMERGENCY

E0 Not required **E2** Emergency system - Remote













STARBURST TRI™ - SUSPENDED

TECHNICAL DATA

LUMINAIRE











Code	STRT1P01	STRT2P01
Light Direction	Direct	Direct/Indirect
Delivered lms	7700	12800
LPW	54	54

FINISH FIXTURE

							
White	Black Metallic - Textured	Silver Metallic - Textured	Gold Metallic - Textured	Wood grain - Light Cherry ¹	Wood grain - Dark Walnut ¹	Midnight Blue Metallic - Textured	Copper Metallic
							
Charcoal Metallic - Textured	Bronze Metallic - Textured	Champagne Metallic	Red Metallic - Textured				

¹ Longer than normal lead times may apply, consult factory.

FINISH CANOPY

							
White	Black Metallic - Textured	Silver Metallic - Textured	Gold Metallic - Textured	Midnight Blue Metallic - Textured	Copper Metallic	Charcoal Metallic - Textured	Bronze Metallic - Textured
							
Champagne Metallic	Red Metallic - Textured						



APPROVALS



STARBURST TRI™ - SUSPENDED




DIMENSIONAL DIAGRAMS

COLLAPSED

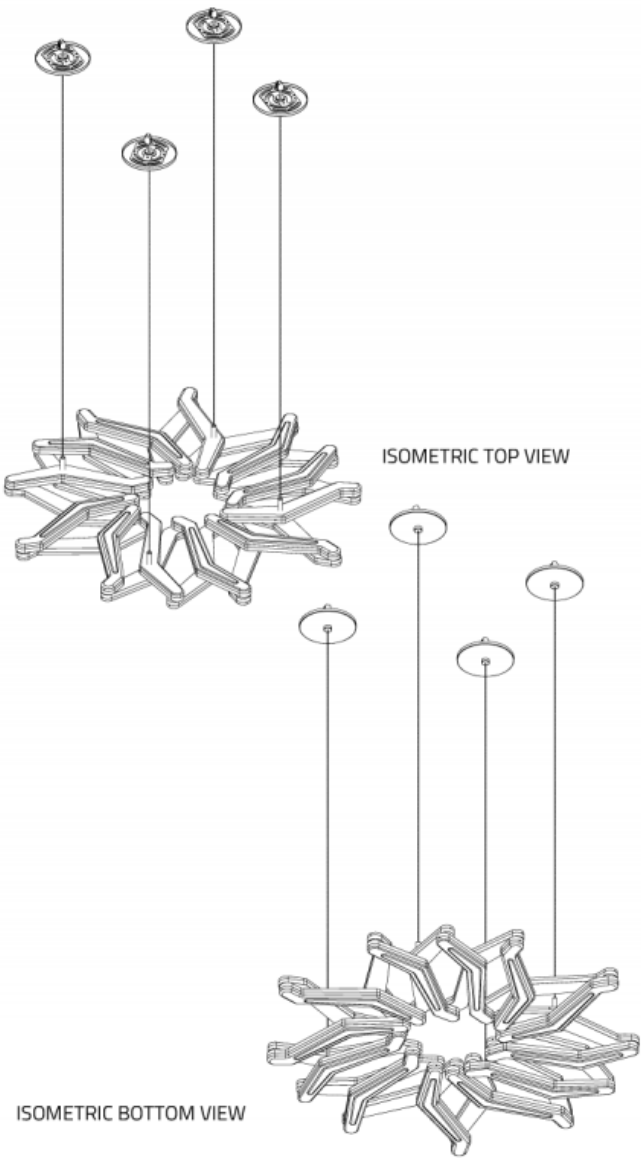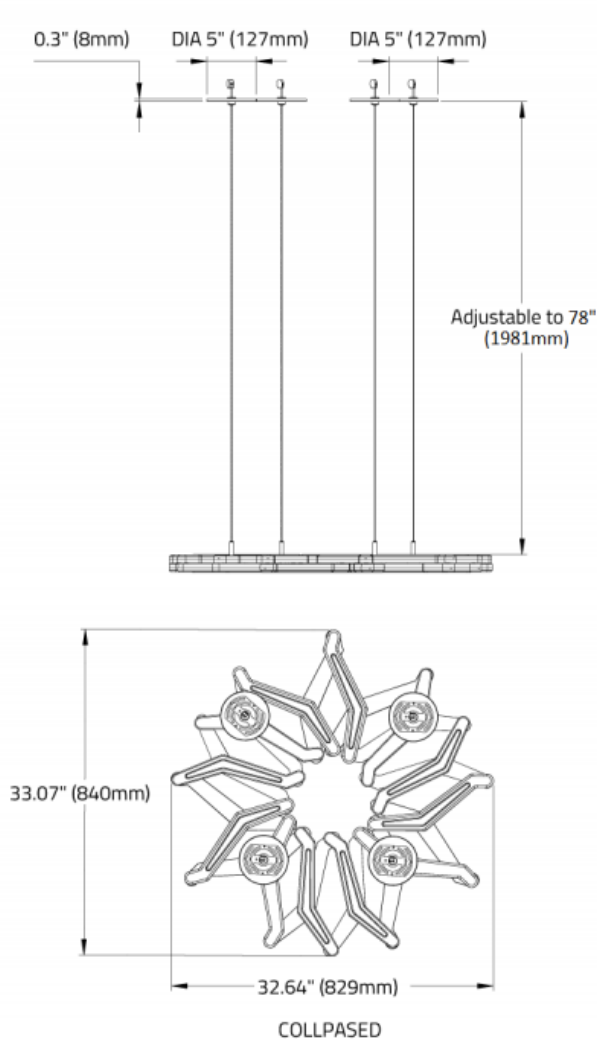





STARBURST TRI™ - SUSPENDED

PARTIAL EXPANSION

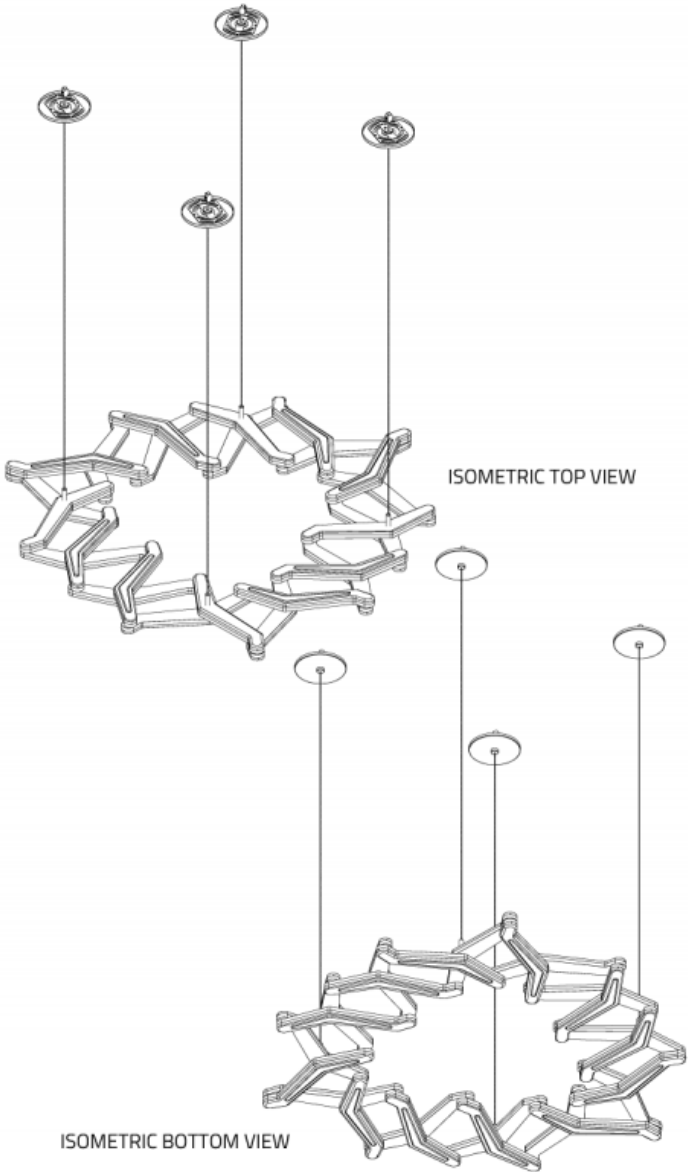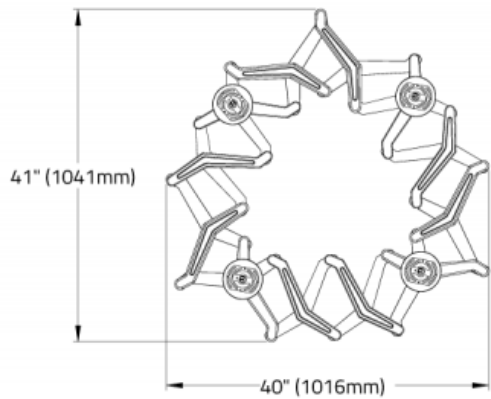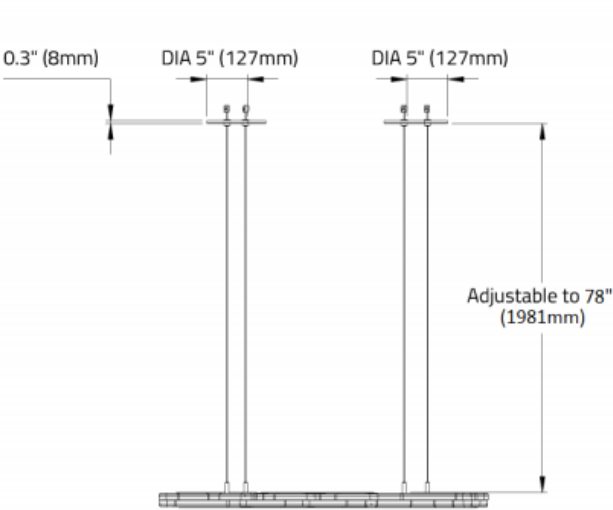

STARBURST TRI™ - SUSPENDED

EXPANDED (TRIANGLE)

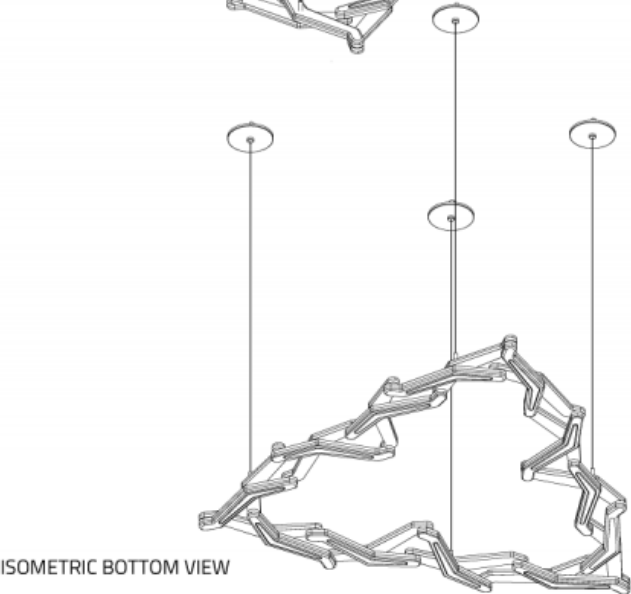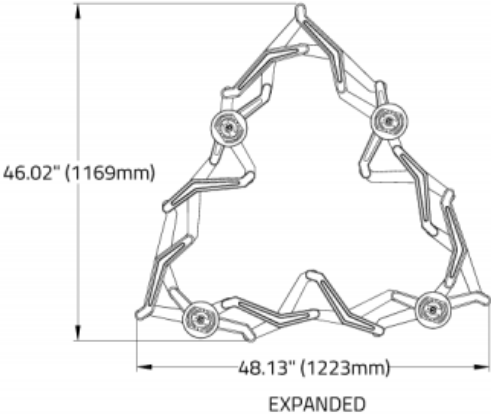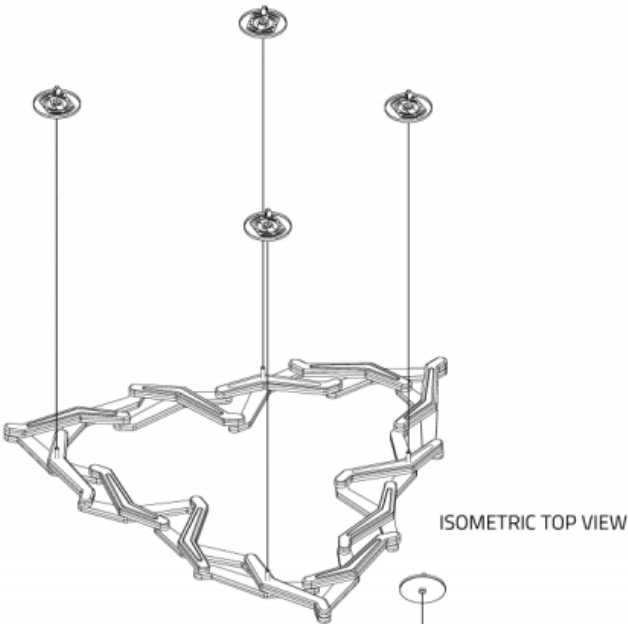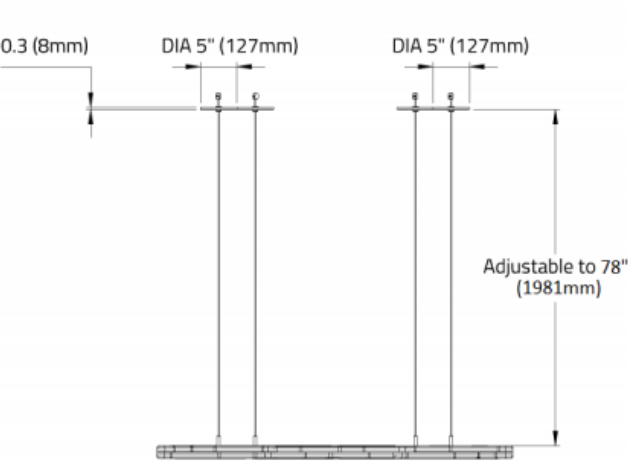

STARBURST TRI™ - SUSPENDED

HYPER EXPANDED (TRILLIUM)

